

12345678

UNNI C02 SMARTIFICATION – REV A

Two-sheet cleanup: standard power symbols, grid-aligned wiring, explicit local connectivity.

USB + Power

ESP32–C6 + Auxiliary

Simulation Harness

File: 01_usb_power.kicad_sch

File: 02_esp_aux.kicad_sch

File: 03_simulation_harness.kicad_sch

Unni C02 Smartification

Sheet: /
File: unni-smartification-c6.kicad_sch

Title: Unni C02 Smartification – ESP32–C6 Rev A

Size: A3Date: 2026–08–19

KiCad E.D.A. 10.99.0–2756–gace8bf0470Id: 1/4

A



B

C



D

E

F

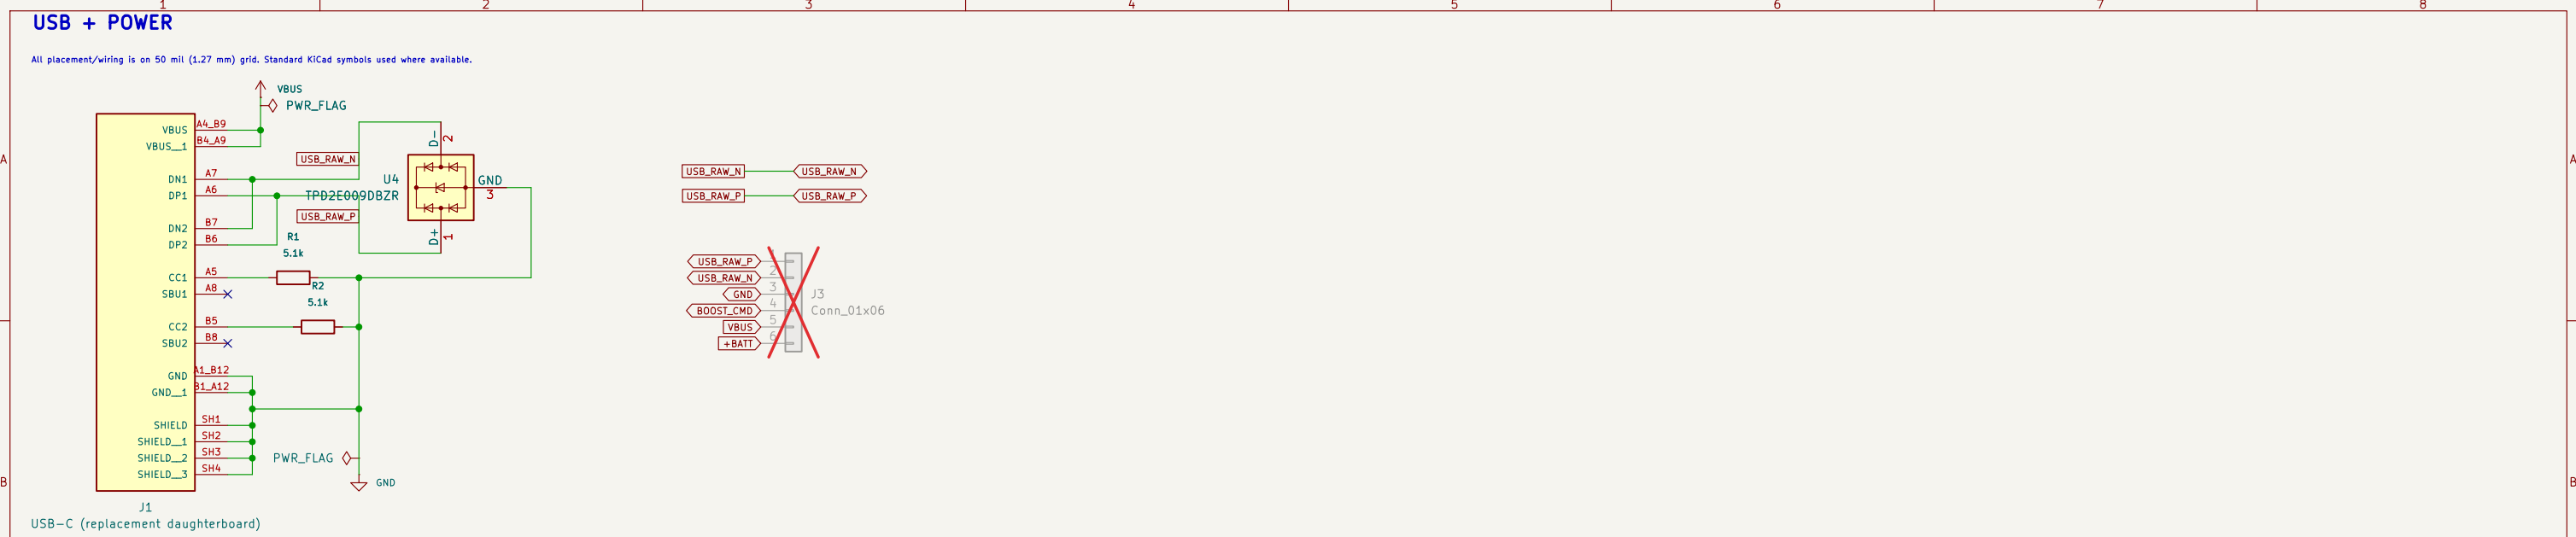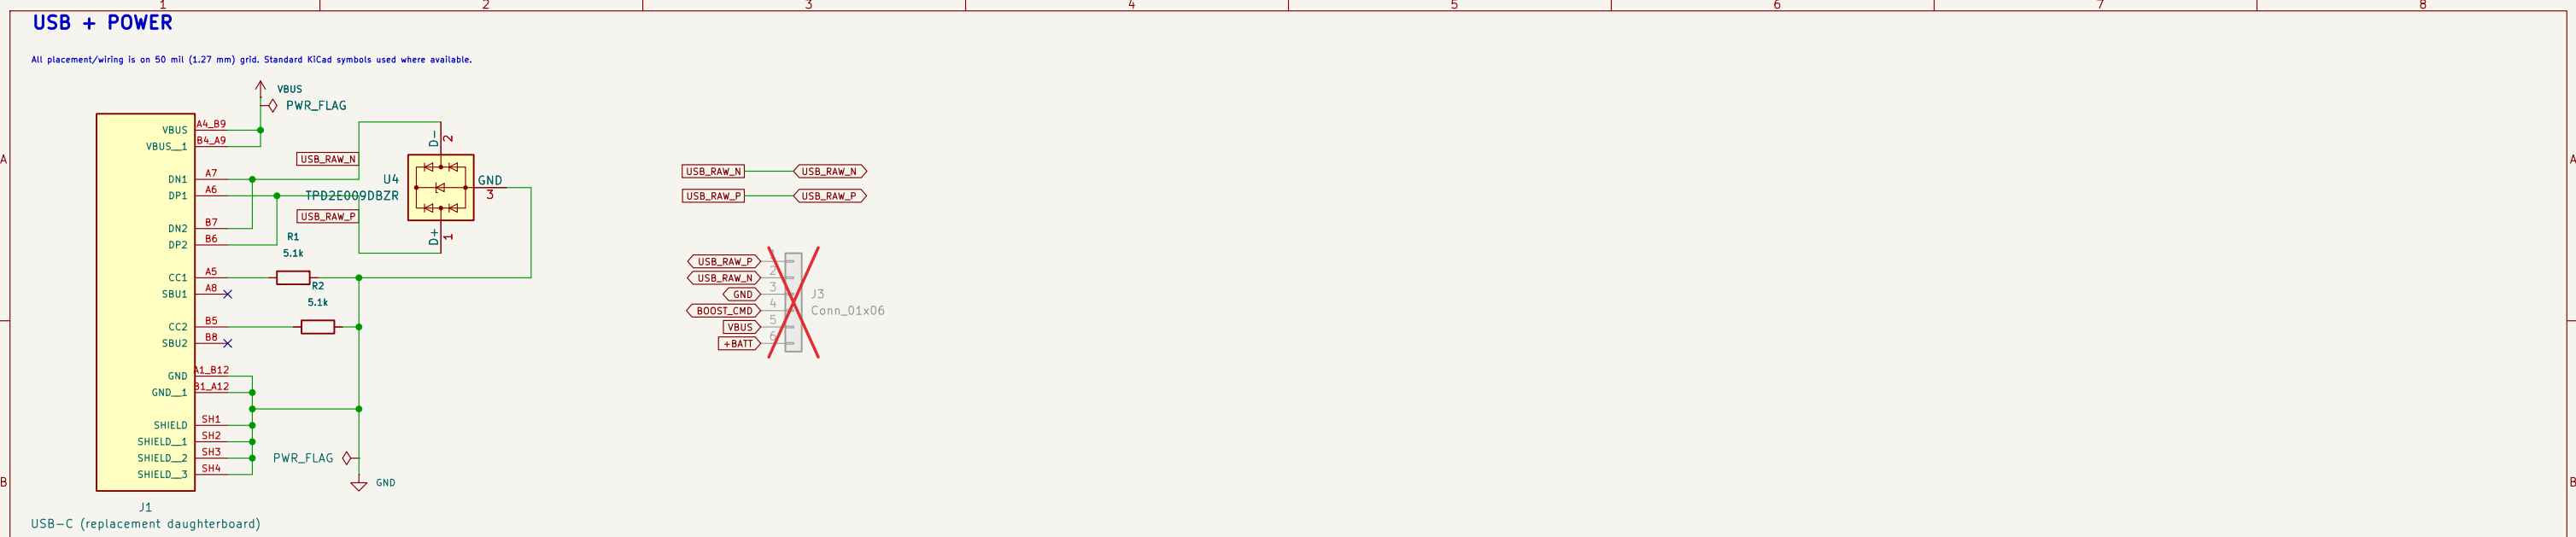[illegible][illegible][illegible]

FORCED-AWAKE 5V



FORCED-AWAKE 5V

BOOST_IN

Q2
A03401A

3 2


+BATT

VBUS

+5V









D2
SS14 DNP

UNNI POWER OUTPUTS

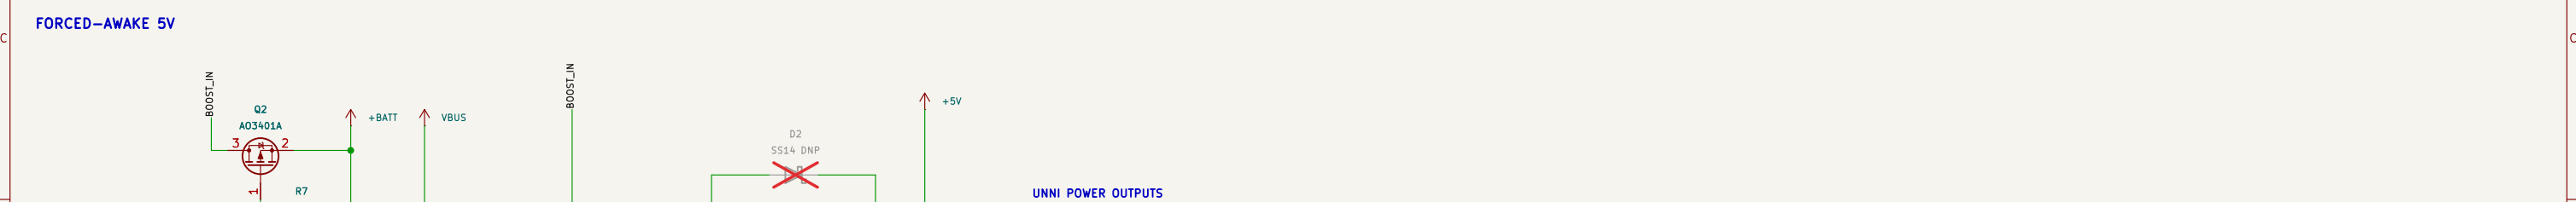

ESP32-C6 + AUXILIARY CIRCUITS

GPI00–3 are reserved for ADC inputs; RT/RH use RTC-capable GPI06/7 for deep-sleep wake.

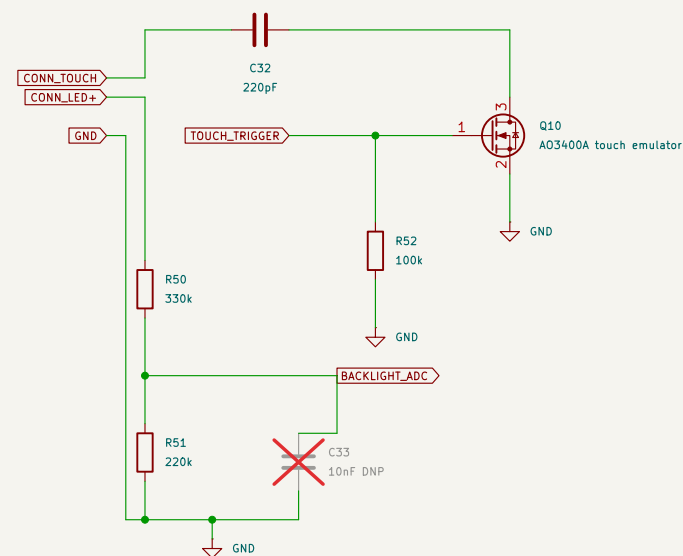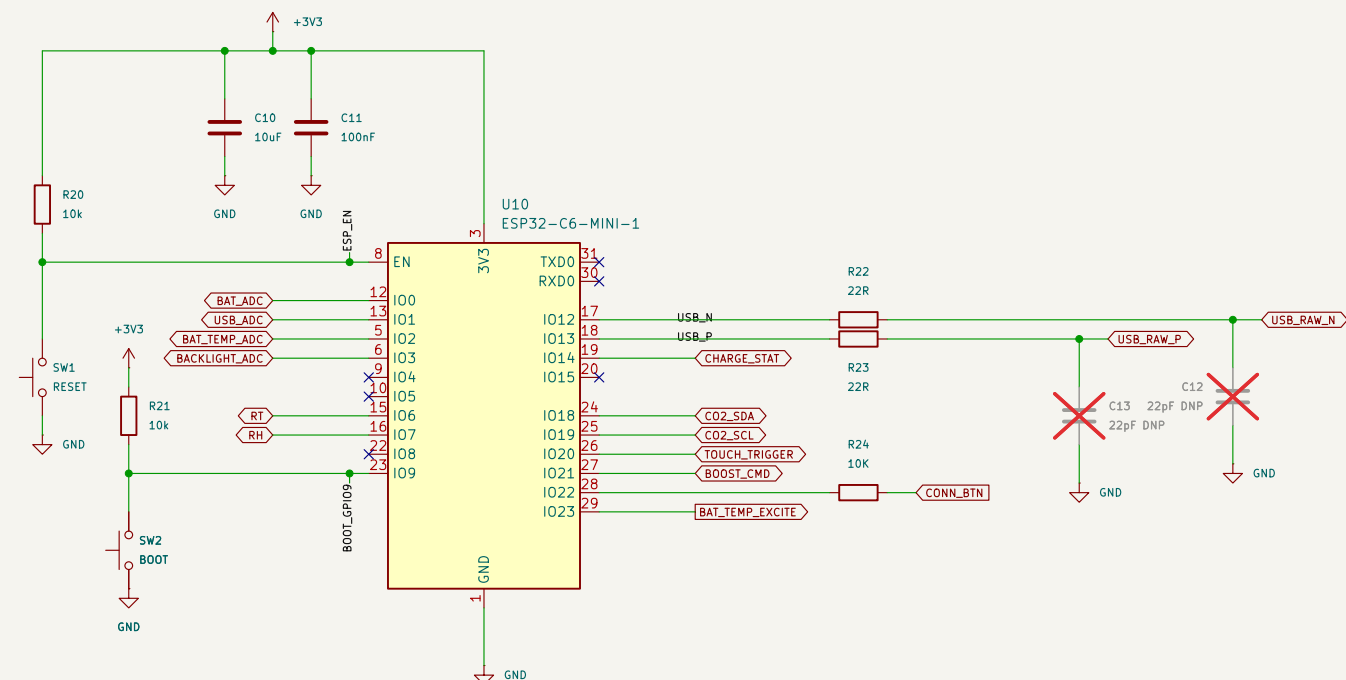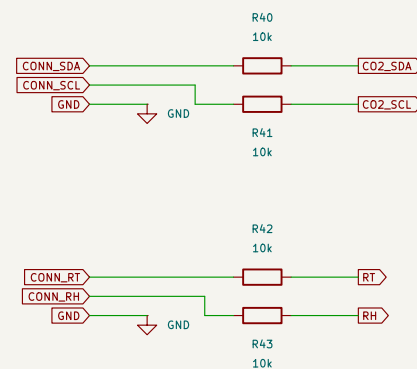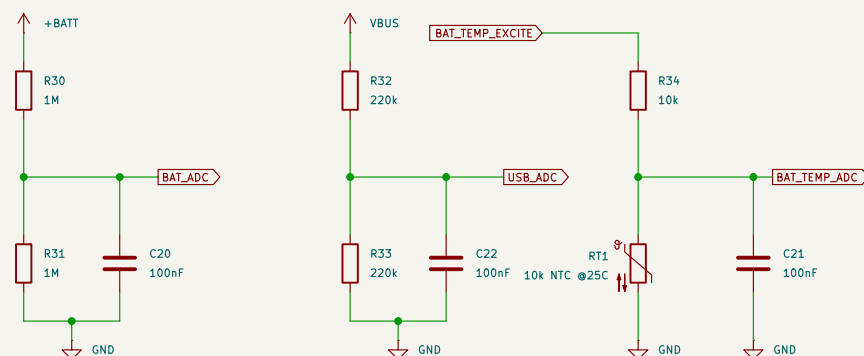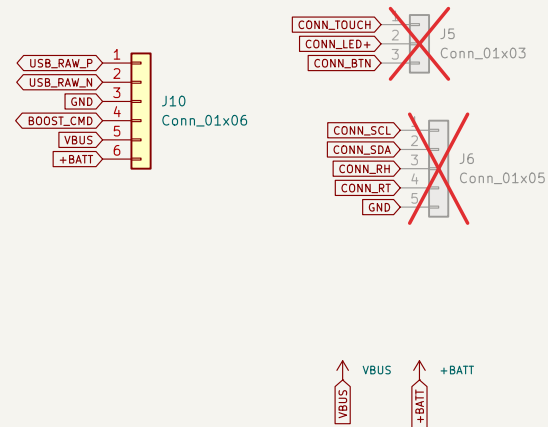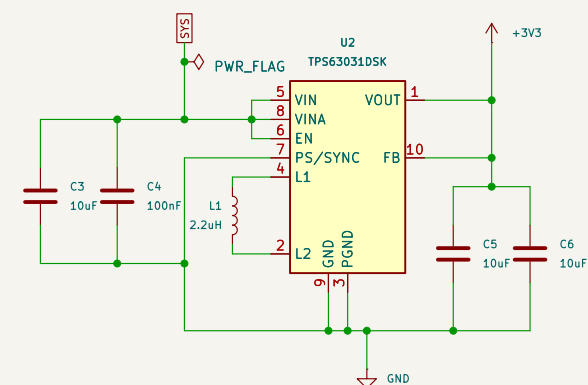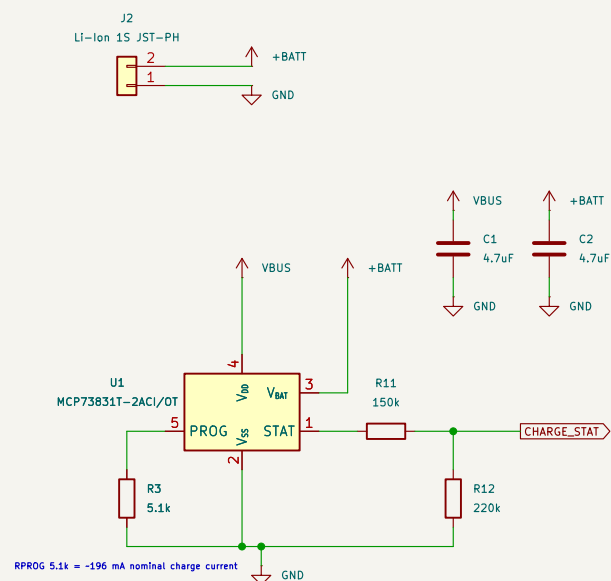

Unni CO2 Smartification

Sheet: /ESP32-C6 + Auxiliary/
File: 02_esp_aux.kicad_sch

Title: ESP32-C6 + Auxiliary Circuits

Size: A3

Date: 2026-08-19


KiCad E.D.A. 10.99.0-2756-gace8bf0470

Rev: A-v29-validated

Id: 3/4

SIMULATION HARNESS – excluded from BOM/PCB

Scenario: battery-only → forced awake → USB hot-plug while BOOST_CMD remains asserted → autonomous charging → USB removal. Battery model includes 120 mΩ ESR. Battery model includes 120 mΩ ESR. I2 is the 3V3-converter input-power proxy. TPS613222A input power/discharge is modeled internally; legacy I3 is excluded from simulation.

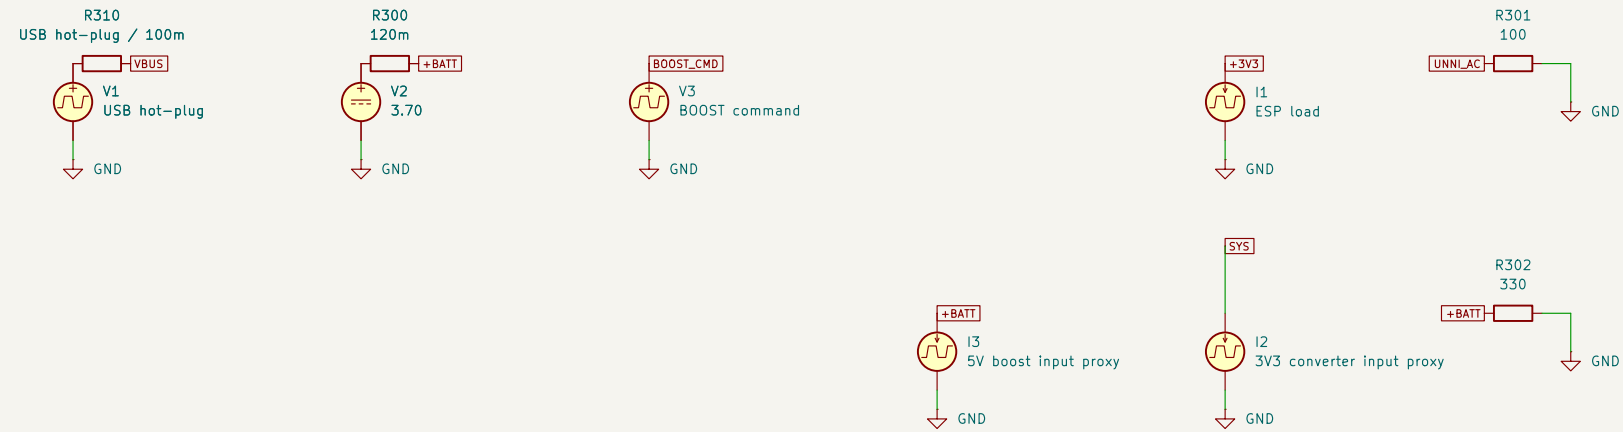

Unni CO2 Smartification

Sheet: /Simulation Harness/
File: 03_simulation_harness.kicad_sch

Title: Simulation Harness

Size: A3	Date: 2026-08-19
KiCad E.D.A. 10.99.0-2756-gace8bf0470	

Rev: A-v29-validated
Id: 4/4