

12345678

UNNI C02 SMARTIFICATION – REV A

Two-sheet cleanup: standard power symbols, grid-aligned wiring, explicit local connectivity.

USB + Power

ESP32–C6 + Auxiliary

Simulation Harness

File: 01_usb_power.kicad_sch

File: 02_esp_aux.kicad_sch

File: 03_simulation_harness.kicad_sch

Unni C02 Smartification

Sheet: /
File: unni-smartification-c6.kicad_sch

Title: Unni C02 Smartification – ESP32–C6 Rev A

Size: A3Date: 2026–08–19

KiCad E.D.A. 10.99.0–2795–g77a613d64cId: 1/4

A

B

C

D

E

F


12345678

Unni C02 Smartification			
Sheet: / File: unni-smartification-c6.kicad_sch			
Title: Unni C02 Smartification – ESP32–C6 Rev A			
Size: A3		Date: 2026–08–19	
KiCad E.D.A. 10.99.0–2795–g77a613d64c		Id: 1/4	

Rev: A–v29–validated

USB + POWER


All placement/wiring is on 50 mil (1.27 mm) grid. Standard KiCad symbols used where available.

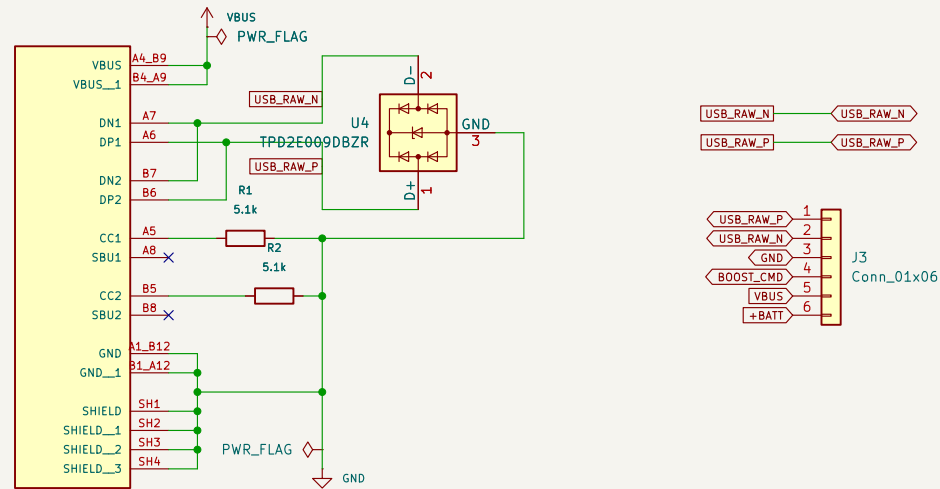


J1
USB-C (replacement daughterboard)

MCP73831 is on the ESP/battery board: R3 = 5.1 kΩ sets -196 mA; STAT is monitored by the ESP. Battery NTC remains firmware-supervised.

FORCED-AWAKE 5V








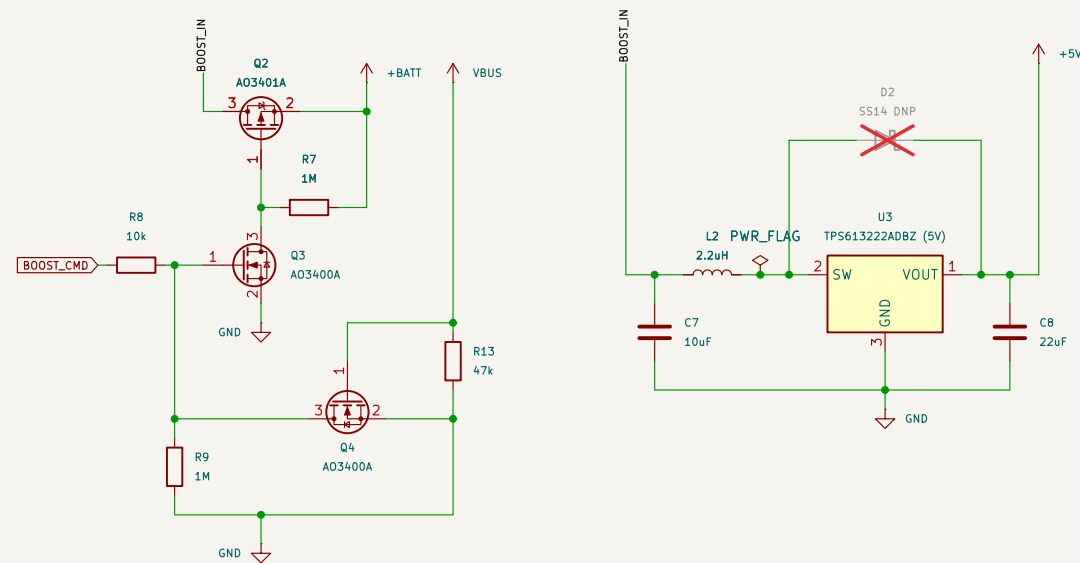


UNNI POWER OUTPUTS

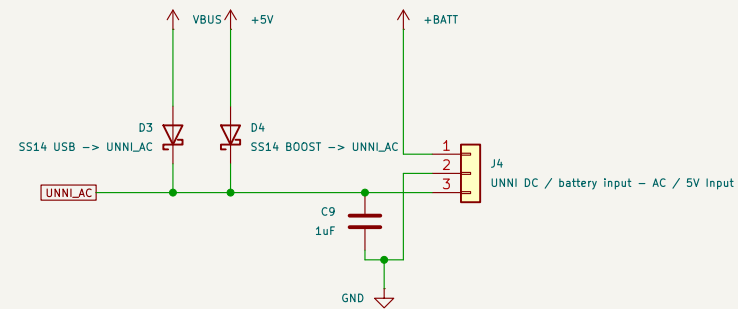

ESP32-C6 + AUXILIARY CIRCUITS

GPIO0–3 are reserved for ADC inputs; RT/RH use RTC-capable GPIO6/7 for deep-sleep wake.

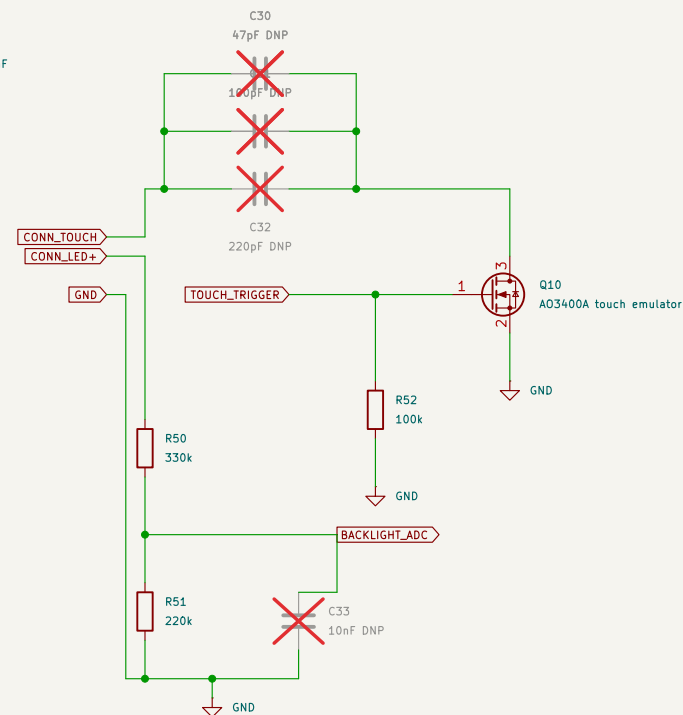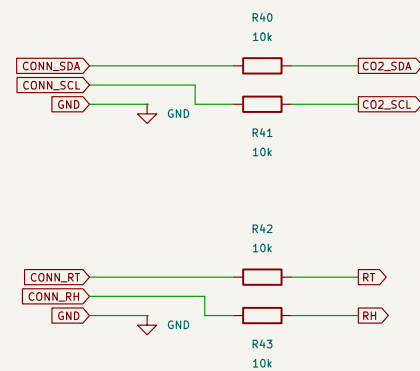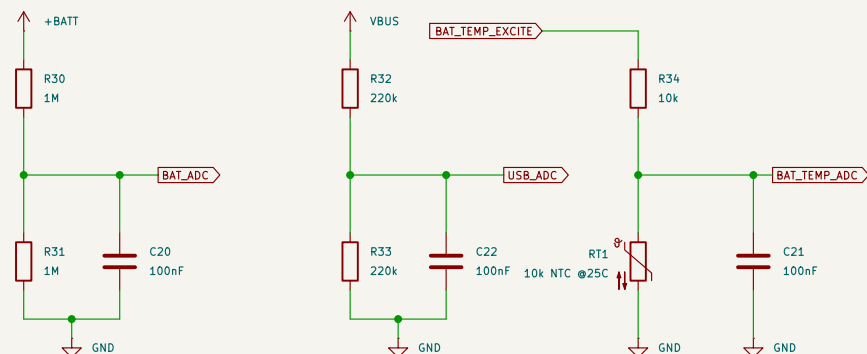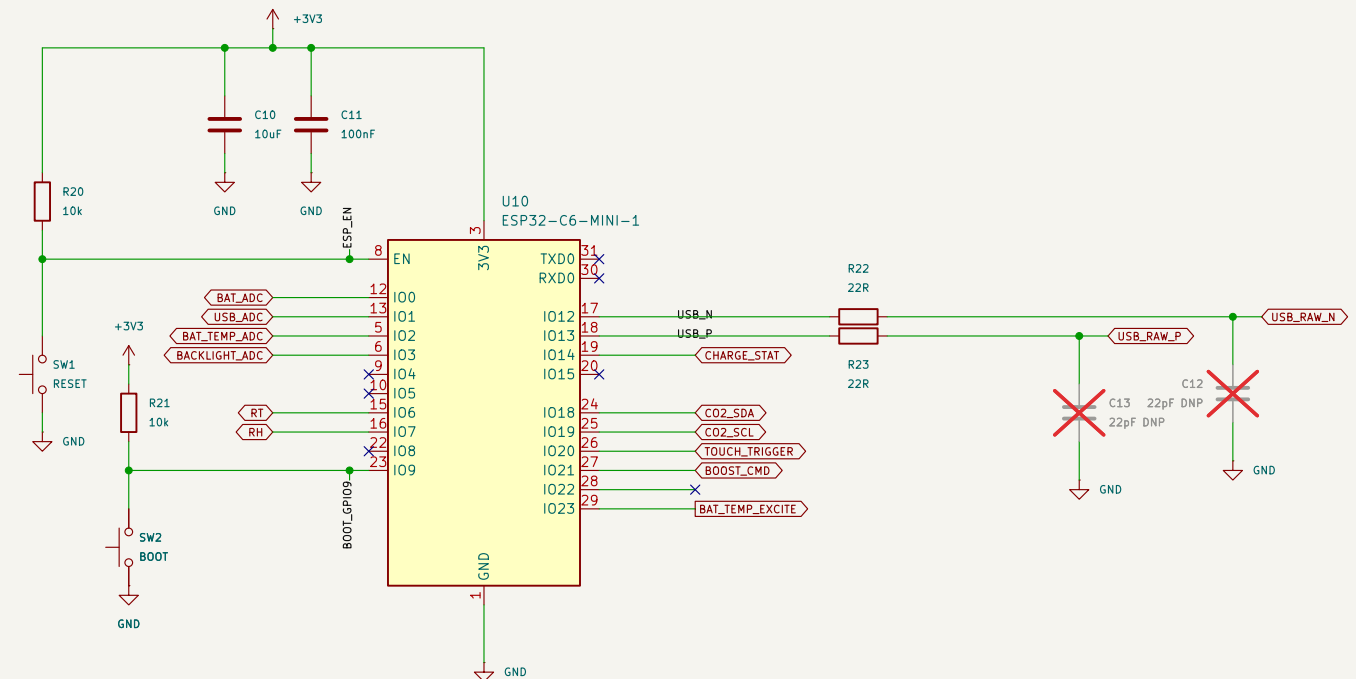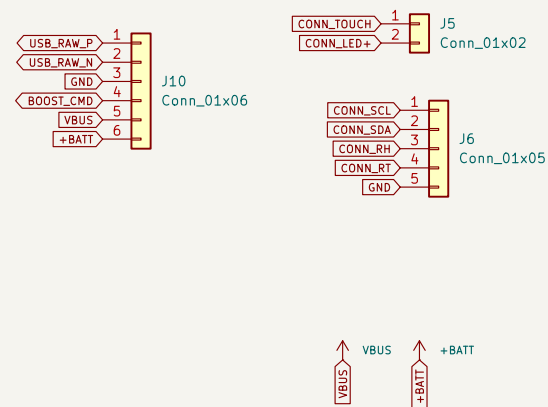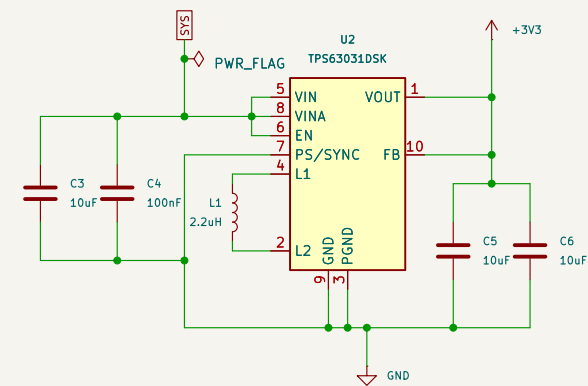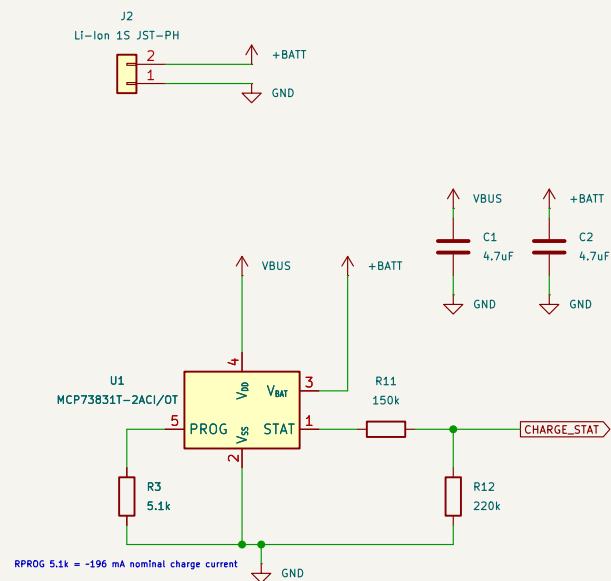

Unni CO2 Smartification

Sheet: /ESP32-C6 + Auxiliary/
File: 02_esp_aux.kicad_sch

Title: ESP32-C6 + Auxiliary Circuits

Size: A3

Date: 2026-08-19

DATE: 10/10/2020	DATE: 10/10/2020
KiCad E.D.A. 10.99.0-2795-g77a613d64c	

Rev: A-v29-validated

Id: 3/4

SIMULATION HARNESS – excluded from BOM/PCB

Scenario: battery-only → forced awake → USB hot-plug while BOOST_CMD remains asserted → autonomous charging → USB removal. Battery model includes 120 mΩ ESR. Battery model includes 120 mΩ ESR. I2 is the 3V3-converter input-power proxy. TPS61322A Input power/discharge is modeled Internally; legacy I3 is excluded from simulation.

