


External-machine closed-loop trajectories

The plotted origin follows five minutes of observed target temperatures; subsequent labels are hidden for 20 minutes.


Measured Frozen thermal net (raw) Target-only prefix Source-prior calibration

Winding temperature (°C)


Nearest supported profile
Profile 1; distance 5.54

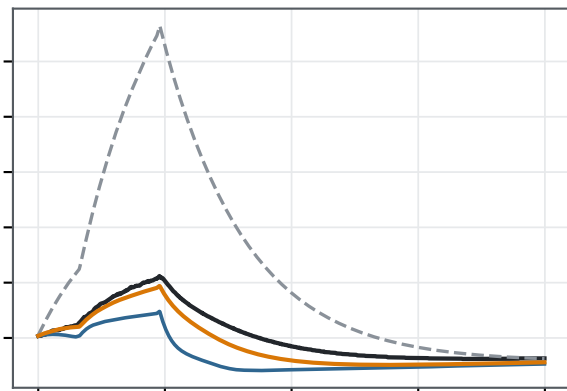

Stator-core temperature (°C)

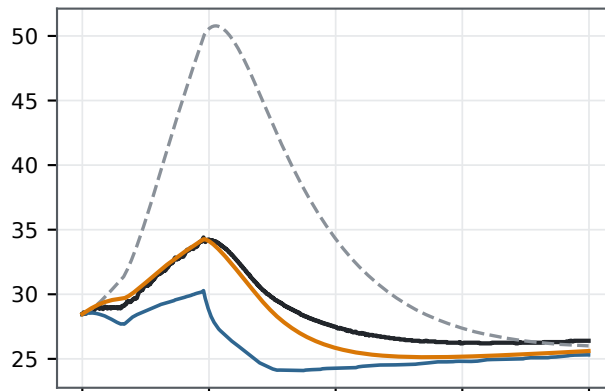


Rotor temperature (°C)

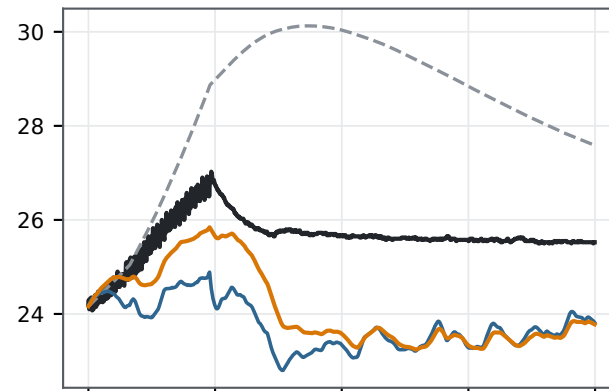


Winding temperature (°C)

Post-reveal numerical failure
Profile 14; distance 10.16

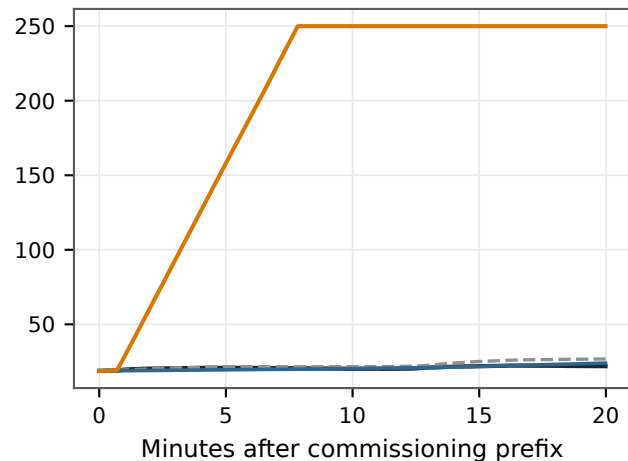

Stator-core temperature (°C)

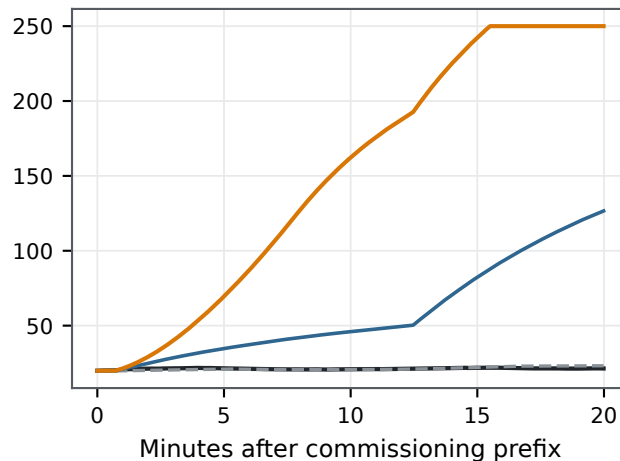

Rotor temperature (°C)

