


External validation performance by method

48 fault records (384 blocks); four held-out healthy loads (32 blocks). Intervals are descriptive at the recorded-data level.

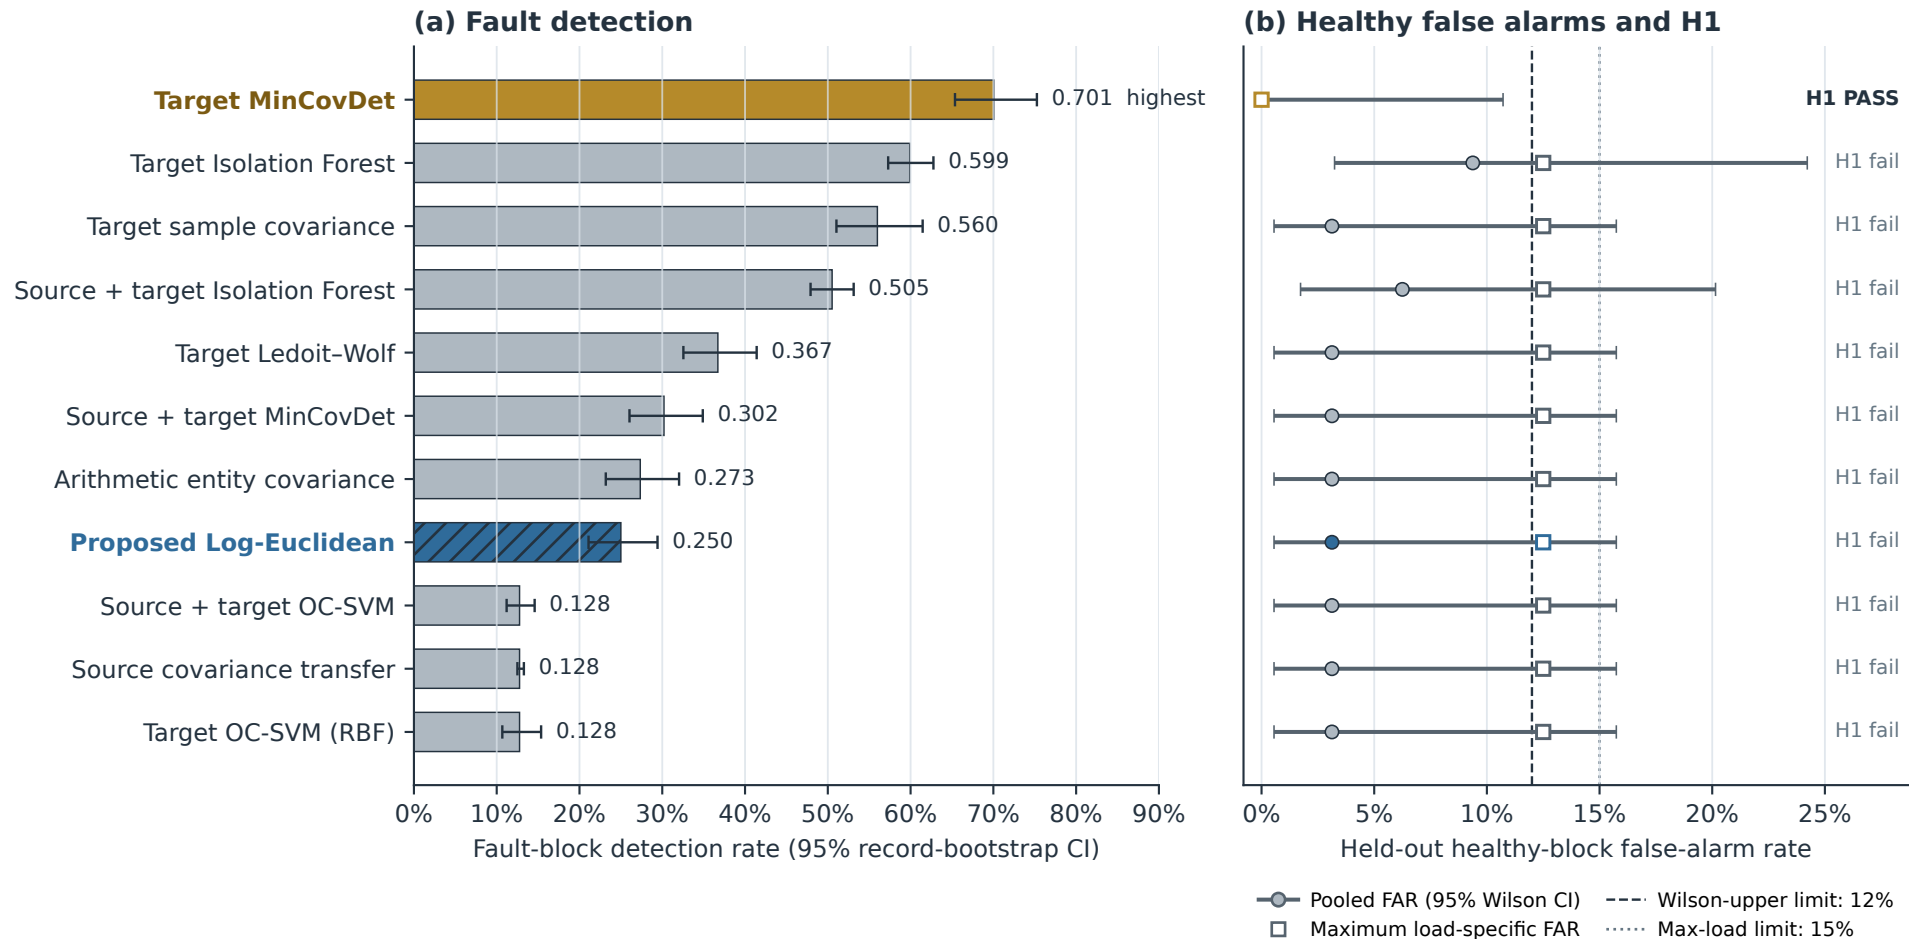

H1 passes only when the pooled Wilson upper bound $\leq 12\%$ and the maximum held-out-load FAR $\leq 15\%$. Gold marks the observed detection leader; hatched blue marks the proposed method.