

(a) Three-fold motor-level holdout

Sources: 1.5 + 3 kW → Target: 1 kW

Sources: 1 + 3 kW → Target: 1.5 kW


Sources: 1 + 1.5 kW → Target: 3 kW

No target-fault label enters fitting, selection, adaptation, or calibration

(b) Ordered target-health deployment record



(c) Healthy-only motor-balanced scoring and alarm calibration

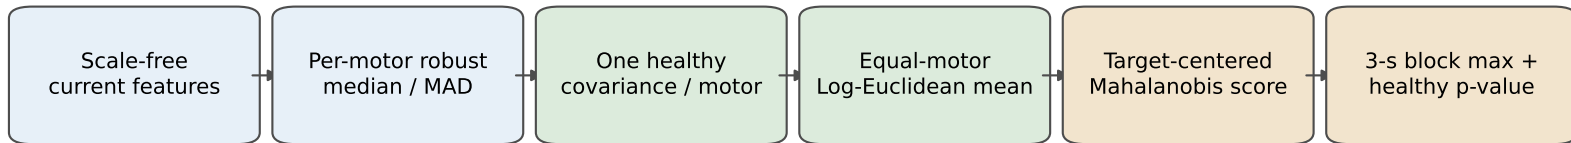

20 target healthy calibration blocks → alarm when upper-tail $p \leq 0.05$