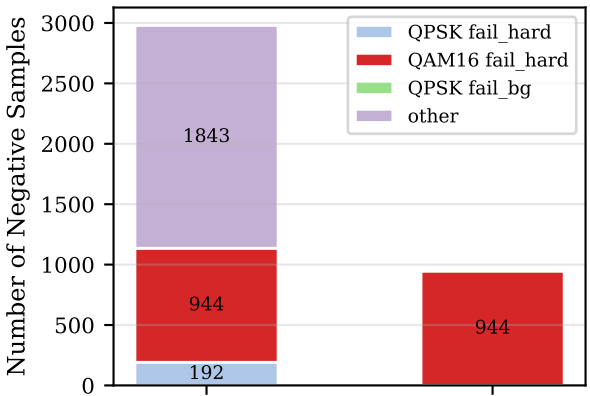
(a) Training Negative Strategy
Number of Negative Samples
3000
2500
2000
1500
1000
500
0
QPSK fail_hard
QAM16 fail_hard
QPSK fail_bg
other
1843
944
192
944
v2
(all negatives)
v3
(QAM16 hard-neg only)

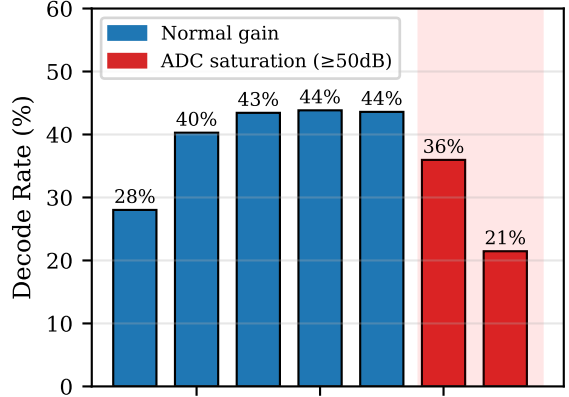
(b) QAM16 Decode Rate vs. RX Gain
Decode Rate (%)
60
50
40
30
20
10
0
Normal gain
ADC saturation (≥50dB)
28%
40%
43%
44%
44%
36%
21%
30
40
50
RX Gain (dB)