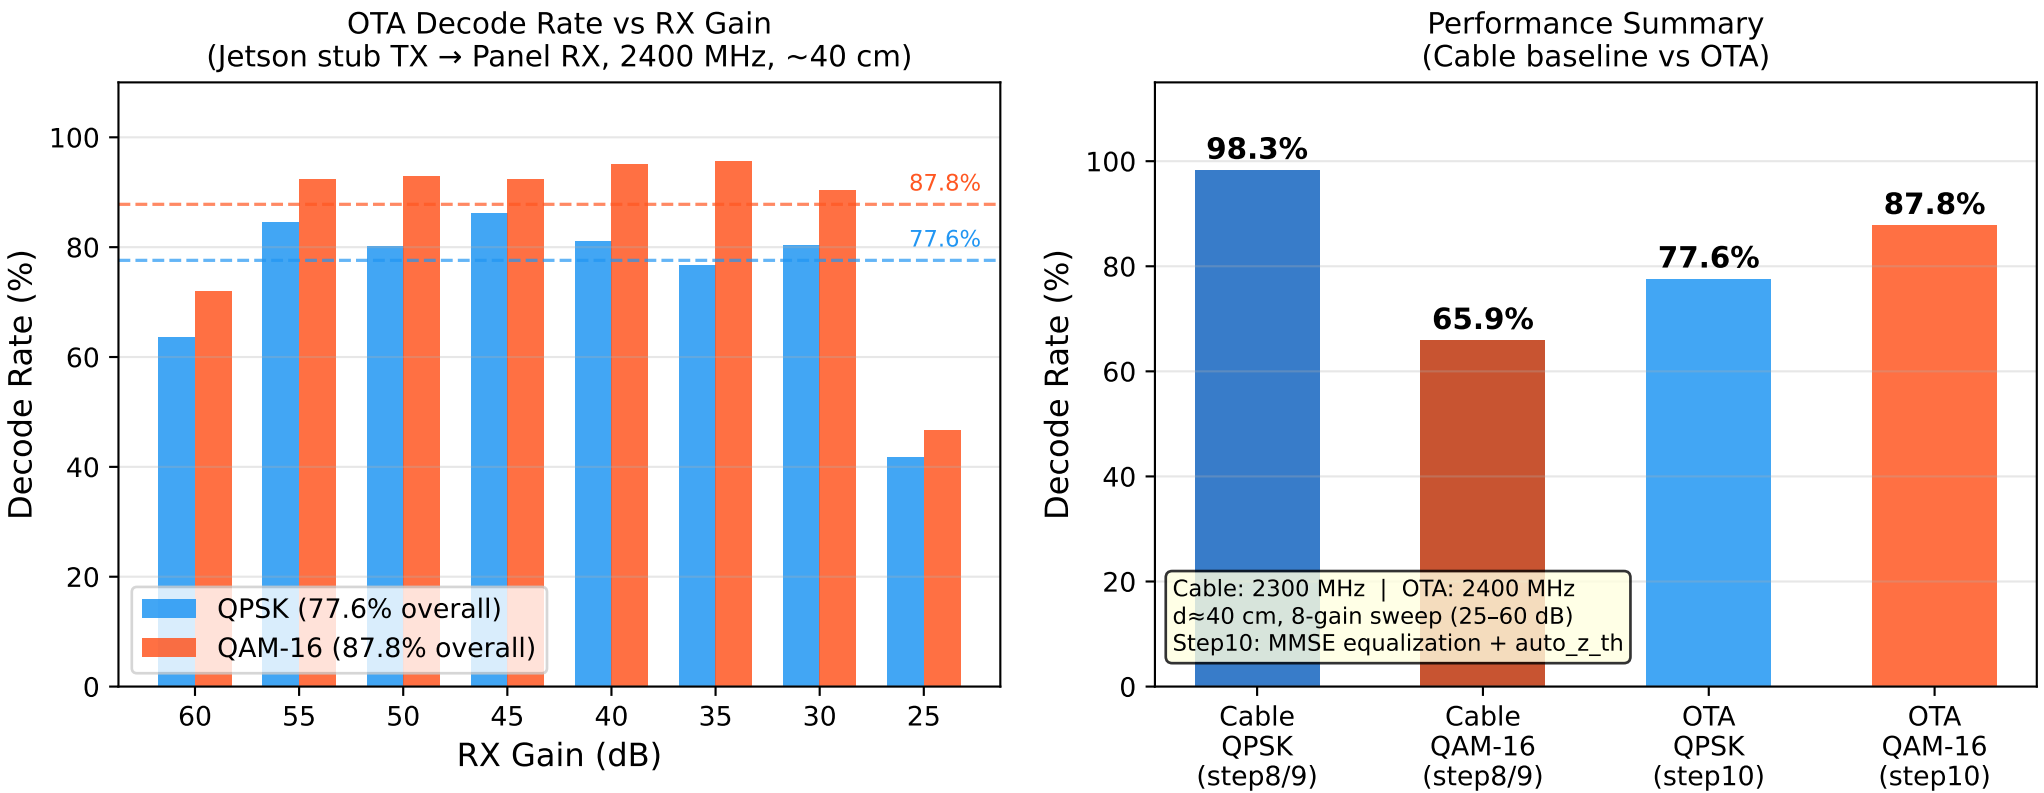
OTA Decode Rate vs RX Gain
(Jetson stub TX → Panel RX, 2400 MHz, ~40 cm)
Decode Rate (%)
RX Gain (dB)
87.8%
77.6%
QPSK (77.6% overall)
QAM-16 (87.8% overall)
Performance Summary
(Cable baseline vs OTA)
98.3%
65.9%
77.6%
87.8%
Cable: 2300 MHz | OTA: 2400 MHz
d≈40 cm, 8-gain sweep (25–60 dB)
Step10: MMSE equalization + auto_z_th
Cable QPSK (step8/9)
Cable QAM-16 (step8/9)
OTA QPSK (step10)
OTA QAM-16 (step10)