Hilectro



2016 Edition

Hilectro Automation
Servo Manipulator
Leader of Automation Solution

HAITIAN
Drive Systems

宁波海天驱动有限公司
NINGBO HAITIAN DRIVE SYSTEMS CO.,LTD.
地址：浙江省宁波市北仑区小浃江中路518号 邮编：315801
ADD:No.518,Xiaojiajiang Middle Road,Beilun District,Zhejiang,China,315801
电话/Tel: 0574-86181693/86188886
传真/Fax:0574-86181692
网址/Web:www.hilectro.com

海天驱动销售分公司：

样本参数更新恕不另行通知
本公司对样本参数更新保留最终解释权

www.hilectro.com
Innovation Drives Future





HAITIAN
Drive Systems

Hilectro

PROFILE

About Haitian Drive

Ningbo Haitian Drive Systems Co., Ltd. is one of the four pillar industries of Haitian Group. Relying on the advantages of Haitian Group platform, Haitian Drive has grown to be the leading manufacturer in the fields of servo control system (servo motor, servo drive, control system), automation (servo manipulator and peripheral automation, robot automation, magnetic clamping system, functional components), new energy (electric forklift) and hydraulic transmission (hydraulic motor, hydraulic pump and hydraulic components).

Haitian Drive: Innovation Drives Future

Haitian Drive put forward the "Innovation Drives Future" as the company philosophy in the very beginning based on the management of Haitian Group. We improve the product quality and try to perfect the technical service by continuous innovation with the aim of enhancing the overall competitiveness in the market.We firmly believe that products with superior quality can win more customers whose competitiveness will be enhanced in the meantime.

Innovation Drives Future




BRAND

Professional Manipulator Manufacturer

The professional manipulator R&D team in Hilectro has brought increasingly competitive products for the customers . With the design concept of high efficiency and energy saving, With years of fast development, Hilectro manipulator has been recognized by many customers for excellent quality and superior after -sales services.

Automation Solution Leader

Hilectro can not only develop and produce superior manipulator , but alsoprovide customers with complete automation solutions.With the coming of industry 4.0, increasing number of customers expect more for automation during production.
Therefore,Haitian Drive set up a specialized automation team to provide professional automation solutions to the customers.

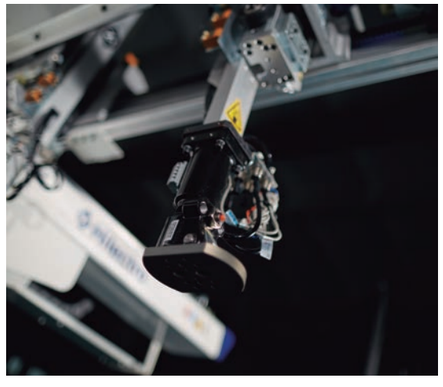





Innovation Drives Future



Processing Advantege


















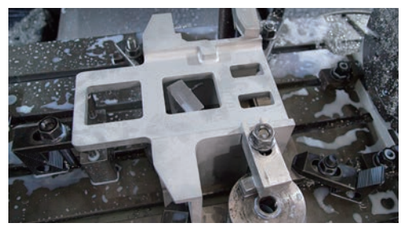

Exquisite Processing ensures superior quality

Focus on Quality









▲ Professional Assembly Line


▼ Component Management for Production










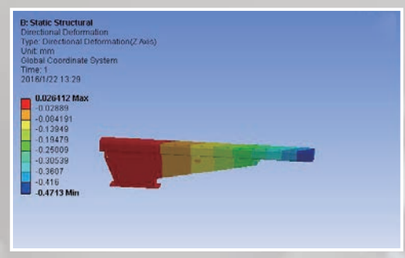

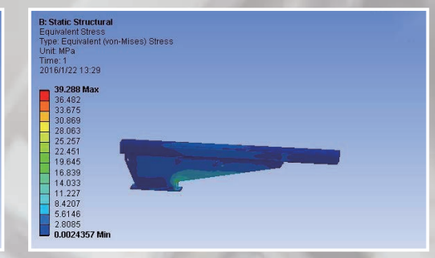

CAE

Structure Optimization


Optimize the structure by professional software

First-rate service



Perfect Service Network

Global Sales and Services Network

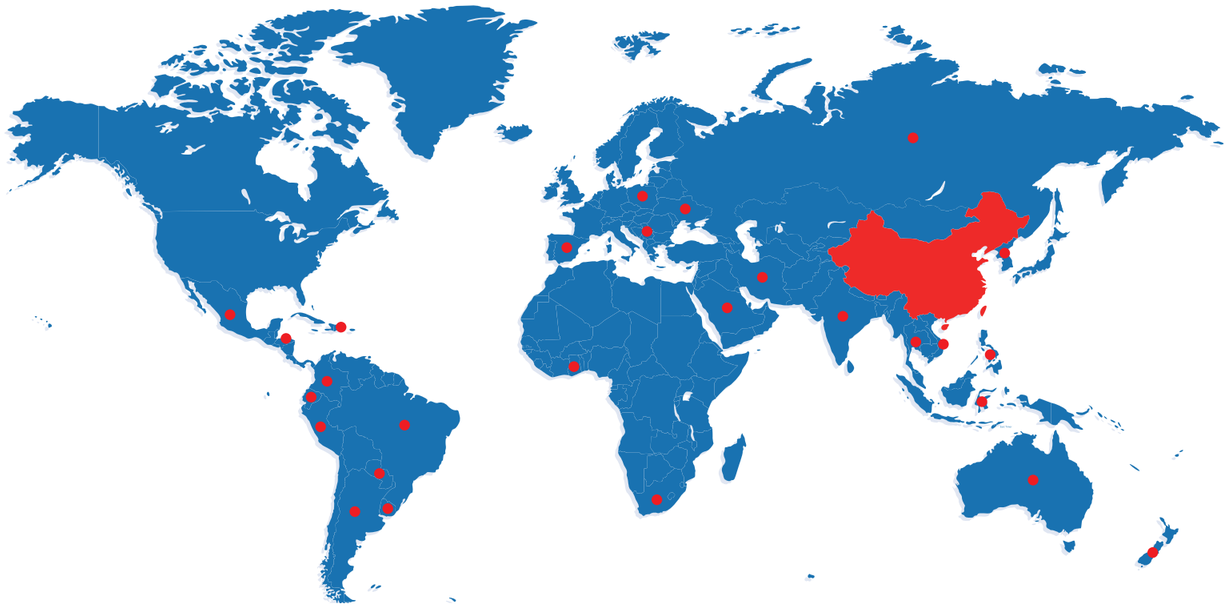

National Free Service Hotline
4001 533 588

Depending on the advanced platform of Haitian Group, Hilectro has developed a powerful and all-round sales and service network. Haitian Group has more than 80 agencies in the world, covering more than 130 countries and regions, ensuring customers with efficient and high-quality services.



1 Improve the before-sales service
为您提供售前机型选型、自动化方案，厂房合理化建议等售前服务。

2 24 hours service
Register and provide door to door after-sales service within 24 hours after receiving notice.

3 Lifelong maintenance
Lifelong maintenance is guaranteed with one year free of charge, and provide professional product recommendation and maintenance services with high speed.

4 Systematic training
Provide free installation and commissioning for new machine, and systematic training for operation, maintenance and fixture instruction.

5 Regular return visit
Establish CRM management system for each device including file management, and do regular return visit to provide professional guidance and considerate service.

6 Equipment upgrade
Provide systematic service -for upgrading hardware and software to extend the service life of equipment.

Catalog

01 Controller — 13-14



02 Single axis and two axis servo manipulator

XTB-I/H S ,XTB-I/HD,XTE-I(H)D — 15-20



03 Full servo small, Medium manipulator

XTA-I/HS ,XTA-I/HD — 21-26



04 Full servo manipulator

XTA-I/HD,XTA(Star)-I/HD — 27-28



05 Fully open servo manipulator

XTD-ID — 29-30



06 Special manipulator

XTC , XTS , XTH — 31-34



07 Other introduction

At the end of inversion, fixture case, standard configuration — 35-40



08 Automation projects

Feed, robot manipulator automation, automation, automation of periphery — 41-46



www.hilectro.com

Innovation creates Future

Product naming rules


XTA – 3000 t HD – T1


- T : special machine code (T1, T2)
  CE : CE machine
  h : high speed machine
  B : walking single servo model
- ID: telescopic type-arm
  HD: telescopic type-dual arms
  IS: single stage-arm
  HS: single stage-dual arms
- Double main arm type
- 3000 : up and down stroke 3000mm
- XTA: full servo series
  XTB: single axis servo series
  XTC: longitudinal series
  XTD: open series
  XTE: two axis servo series
  XTS: side take series
  XTH:truss series (CNC machine tool industry)

Industry certification

09/10

Fit injection molding machine

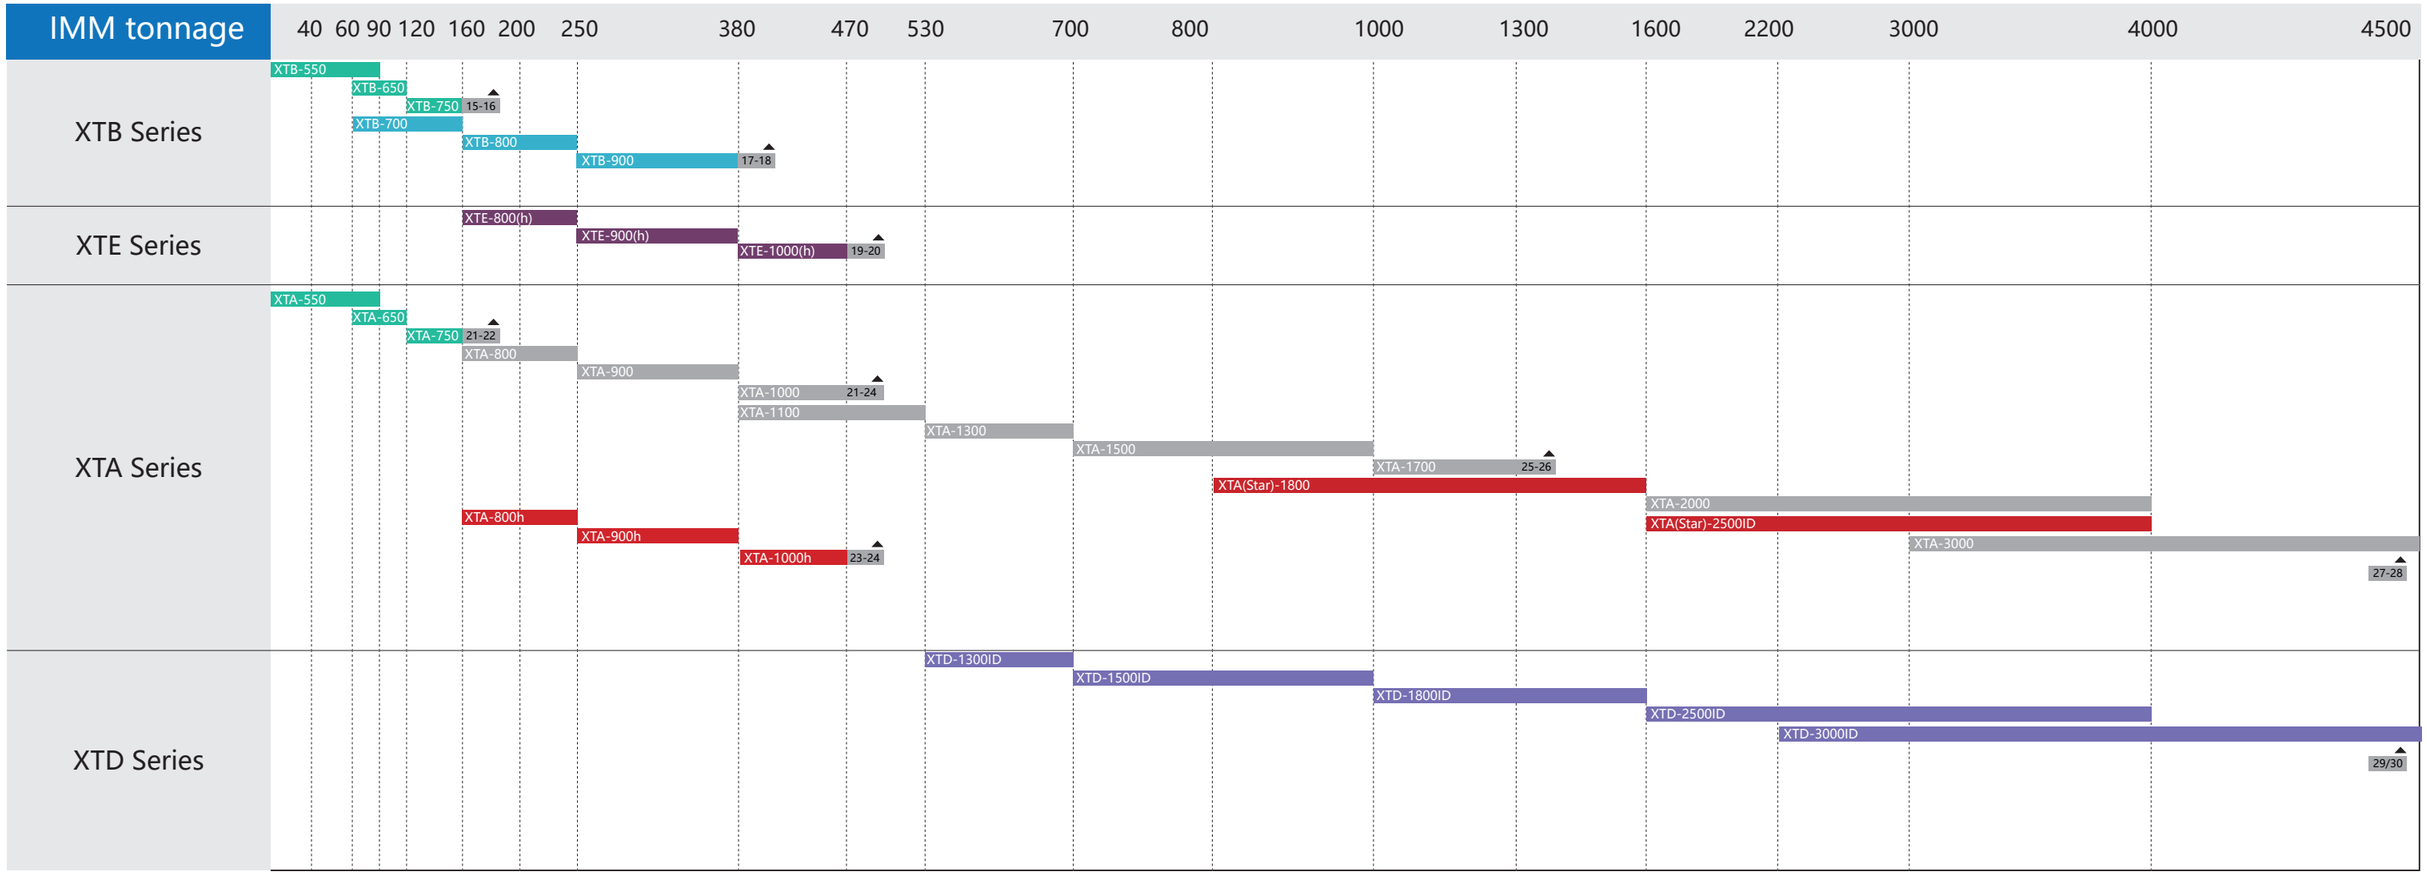

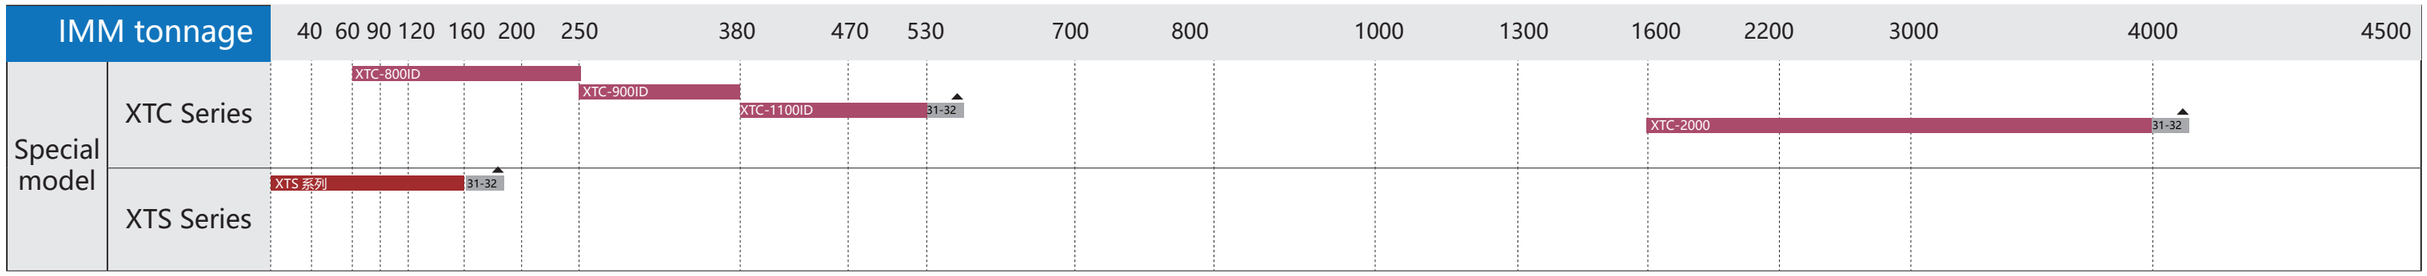

This list is to help users understand the selection of mechanical manupulator, and pls call for new inquiries and questions on paremeters according to different requirements of different projects.

Major Applications in Industries

Automotive · Logistics · Household appliance · Electronic · Civilian · Toy

Advanced control system



Controller Features

> Embedded real-time system, high integration, high reliability, high scalability.
> Color touch screen, graphical interface, simple operation (3.2 inch, 5.7 inch, 7 inch)
> Using Euromap12 standard, host and manipulator signal security chain. (OP: Euromap67)
> The opening function of the middle opening, the opening position and the order of the nozzle can be set.
> Air pressure detection function, can monitor the intake pressure and adsorption pressure, and display the pressure value
> Packing list function: standard features (256 points)
> Teaching mode has a fixed mode and free mode optional
> Super memory capacity
> The position of the robot arm can be outside the mold.
> Can remember the program, can support USB offline editing
> Can automatically detect the fault situation and display in the screen

Operator



3. 2 英寸

XTB-550 I(H)S
XTB-650 I(H)S
XTB-750 I(H)S
XTB-700 I(H)D
XTB-800 I(H)D
XTB-900 I(H)D
XTB-1000 I(H)D

*The hand operated device is suitable for the electric power adjustment type



5. 7 英寸

XTA-550 I(H)S
XTA-650 I(H)S
XTA-750 I(H)S
XTA-700 I(H)D
XTA-800 I(H)D
XTA-900 I(H)D
XTA-1000 ID
XTA-1100 I(H)D
XTA-1300 I(H)D

*the hand operator is suitable for two axis servo models and XTH series models.



7 英寸

XTA-1500 I(H)D
XTA-1700 I(H)D
XTA-1800 I(H)D
XTA-3000 I(H)D
XTD-1500 ID
XTD-1800 ID
XTD-2500 ID
XTD-3500 ID

*mall models can be purchased in accordance with the requirements of 7 inch hand operator



XTA-1800 I(H)D STAR
XTA-2000 I(H)D STAR



Full touch screen hand device Part of the OP models and CE models More than 6 axis models (including end extensions)

XTB–I(H)S
Small series

Single axis servo single cut suspension

Fit 40–200t IMM

More simple

More economical



Basic reference

Model \ Unit	Form of boom	IMM	Length	Width	Height	Power to be consumed	Power supply	Capacity of power supply equipment	Air pressure	Amount of air to be consumed	Type of drive	Minimum pickup time	Full-circulation time (not including fixture)	Maximum load (including fixture)	Post torque	Weight
	-	ton	mm	mm	mm	kw	-	KWA	Mpa	NL/cycle	-	s	s	kg	N.m	kg
XTB-550I(H)S	Single-cut suspension	40-90	1975	1270	1365	0.7	AC single-phase 200V±10% 50/60HZ	1.6	0.6	16/22	Servo drive of walking axle Cylinder drive of other axles	2.5	6.0	4	5	200
XTB-650I(H)S		90-120	2155	1270	1485	0.7		1.6	0.6	16/22		2.5	6.0	4	5	220
XTB-750I(H)S		120-200	2335	1390	1605	0.7		1.6	0.6	16/22		2.5	6.0	4	5	245

Characteristics of product

>XTB series single servo small models of mechanical hand, X axis drive using high performance AC servo Ma Daqu Dynamic, to meet the needs of rapid access to the.Y axis, Z axis using cylinder drive, more economical.

>Z axis single cut design, good rigidity.

>**Structure is more lightweight design, more energy saving**

>The operating system is simple and the learning cost is low.


>**Side hanging cabinet, more convenient maintenance.**

Household appliance

Civilian

Toy

Size & Data

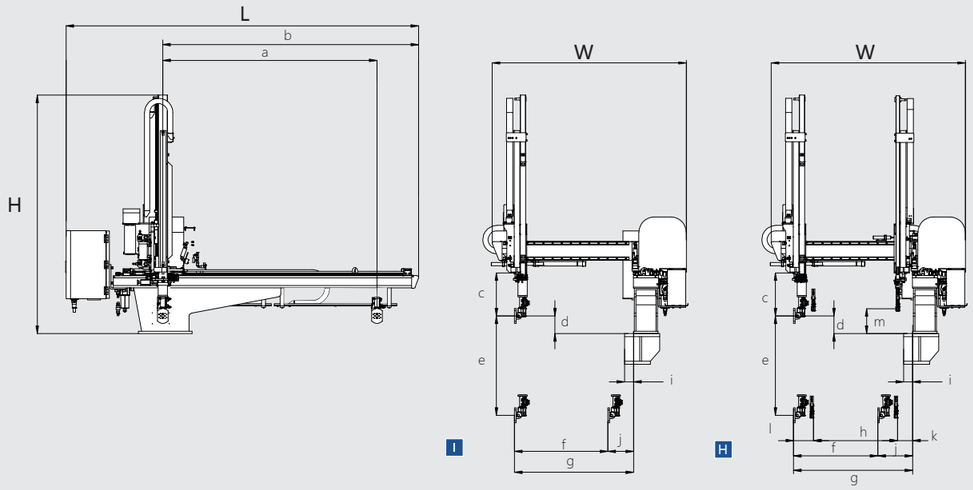

Type	XTB-550		XTB-650		XTB-750		
	XTB-550IS	XTB-550HS	XTB-650IS	XTB-650HS	XTB-750IS	XTB-750HS	
a	1000	1000	1200	1200	1400	1400	a
b	1270	1270	1490	1490	1670	1670	b
c	275	275	275	275	275	275	c
d	140	140	140	140	140	140	d
e	550	550	650	650	750	750	e
f	560	430	560	430	680	550	f
g	680	680	680	680	800	800	g
h	-	430	-	430	-	550	h
i	60	60	60	60	60	60	i
j	120	255	120	255	120	255	j
k	-	115	-	115	-	115	k
l	-	140	-	140	-	140	l
m	-	170	-	170	-	170	m
Remark							Remark

XTB–I(H)D

Small series

Single axis servo double framework model

Fit 760–380t IMM
More efficient
More stable



Basic reference

Unit / 机型	Form of boom	IMM	Length	Width	Height	Power to be consumed	Power supply	Capacity of power supply equipment	Air pressure	Amount of air to be consumed	Type of drive	Minimum pickup time	Full-circulation time (not including fixture)	Maximum load (including fixture)	Post torque	Weight
	-	ton	mm	mm	mm	kw	-	KWA	Mpa	NL/cycle	-	s	s	kg	N.m	kg
XTB-700I(H)D	Double-cut frame	60-160	2240	1430	1150	0.7	AC single-phase 200V±10% 50/60HZ	1.6	0.6	16/22	Servo drive of walking axle Cylinder drive of other axles	2.5	6.0	5	10	270/290
XTB-800I(H)D		160-250	2420	1550	1180	0.7		1.6	0.6	18/22		3.0	7.0	5	10	280/300
XTB-900I(H)D		250-380	2600	1670	1240	0.7		1.6	0.6	20/24		3.5	7.0	5	10	290/310
XTB-1000I(H)D		380-470	2600	1670	1290	0.7		1.6	0.6	22/26		4.0	10.0	5	10	300/320

Characteristics of product

>XTB series of single small servo type mechanical manipulator, X axis drive using high performance AC servo motor drive, to meet the demand for fast access to the.Y axis, Z axis using cylinder drive, more economical.

>Z axis double cut speed design, faster. At the same time to meet the installation requirements of building low customer

>**Structure more lightweight design, more energy efficient.**


>The operating system is simple and the learning cost is low.

>**Side hung electric control cabinet, more convenient maintenance.。**

>**The application of one-piece flip, live longer and more stable, guarantee the stability of the pick-up.**

Household appliance　Civilian　Toy

Size & Data

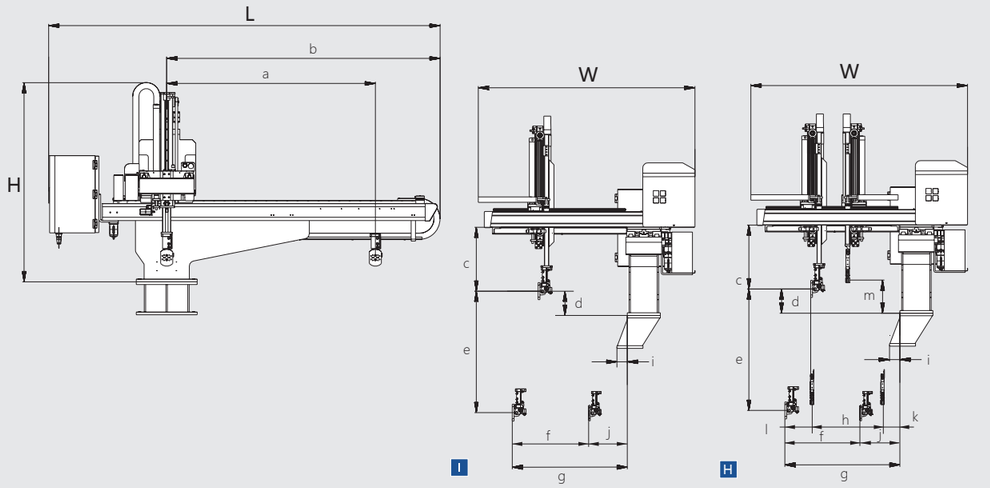

Type	XTB-700		XTB-800		XTB-900		XTB-1000		
	XTB-700ID	XTB-700HD	XTB-800ID	XTB-800HD	XTB-900ID	XTB-900HD	XTB-1000ID	XTB-1000HD	
a	1200	1200	1400	1400	1600	1600	1600	1600	a
b	1560	1560	1740	1740	1920	1920	1920	1920	b
c	370	370	370	370	370	370	370	370	c
d	140	140	140	140	140	140	140	140	d
e	700	700	800	800	900	900	1000	1000	e
f	600	430	700	530	820	650	820	650	f
g	700	700	800	800	920	920	920	920	g
h	-	430	-	530	-	650	-	650	h
i	100	100	100	100	100	100	100	100	i
j	100	270	100	270	100	270	100	270	j
k	-	150	-	150	-	150	-	150	k
l	-	120	-	120	-	120	-	120	l
m	-	190	-	190	-	190	-	190	m
Remark	Maximum stroke (stroke of the cylinder) on the product side: 250; maximum stroke (stroke of the cylinder) on the side of Runner: 150.								
Explanation	The electric adjustment of the axis Y can be modified in allusion to the need of the customer; please call to inquire for specific condition.								

XTE–I(H)D

Small series

Biaxial servo double framework model

Fit 60–470t IMM
More Easy
More Efficient



Basic reference

Unit / Mold	Form of boom	IMM	Length	Width	Height	Power to be consumed	Power supply	Capacity of power supply equipment	Air pressure	Amount of air to be consumed	Type of drive	Minimum pickup time	Full-circulation time (not including fixture)	Maximum load (including fixture)	Post torque	Weight
	-	ton	mm	mm	mm	kw	-	KWA	Mpa	NL/cycle	-	s	s	kg	N.m	kg
XTE-800I(H)D	Double-cut frame	60-250	2420	1500	1280	0.7	AC single-phase 200V±10% 50/60HZ	3.0	0.5	10/12	Cylinder drive of front and back axles Servo drive of other axles	1.5	6.2	5	10	300/330
XTE-900I(H)D		250-380	2600	1620	1330	0.7		3.0	0.5	12/14		1.5	6.2	5	10	310/340
XTE-1000I(H)D		380-470	2600	1620	1345	0.7		3.0	0.5	14/16		1.5	6.2	5	10	310/340
XTE-800ID/h		60-250	2420	1500	1280	0.7		3.0	0.5	10		0.85	4	1	10	300
XTE-900ID/h		250-380	2600	1620	1330	0.7		3.0	0.5	12		0.85	4	1	10	310
XTE-1000ID/h		380-470	2600	1620	1345	0.7		3.0	0.5	14		0.85	4	1	10	310

Characteristics of product

>XTE series of smal
l models of two axis servo manipulator, X axis, Z axis drive with high performance AC.Service motordriver, to meet the needs of fast access to the.Y axis, Z1 axis using cylinder drive, more economical.Z axis double cut speed design, faster. At the same time to meet the installation requirements of building low customer.


>**Structure is more lightweight design, more energy saving**

>The operating system is simple and the learning cost is low.

>**The application of one-piece flip, live longer and more stable, guarantee the stability of the pick-up.**

Household appliance Civilian Toy

Size & Data

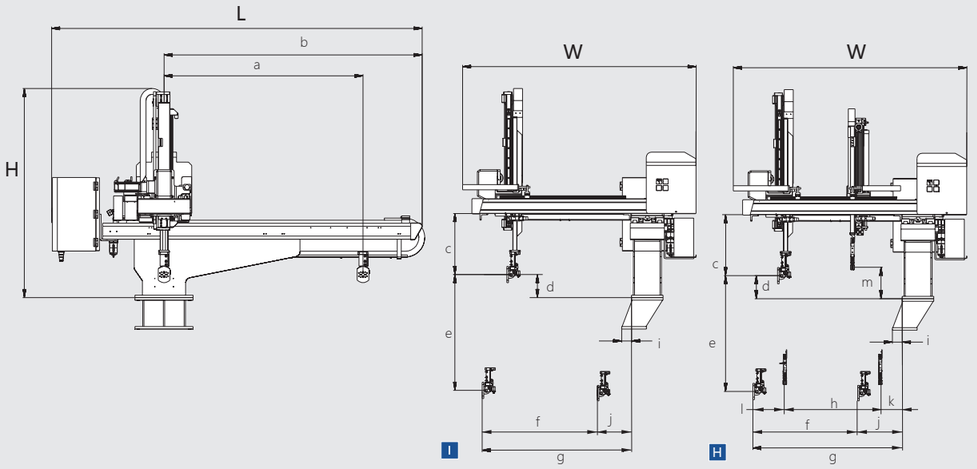

Type	XTE-800		XTE-900		XTE-1000		
	XTE-800ID	XTE-800HD	XTE-900ID	XTE-900HD	XTE-1000ID	XTE-1000HD	
a	1400	1400	1600	1600	1600	1600	a
b	1740	1740	1920	1898	1920	1920	b
c	375	375	375	364	375	375	c
d	130	130	130	130	130	130	d
e	800	800	900	900	1000	1000	e
f	670	500	620	250	790	600	f
g	800	800	920	730	920	920	g
h	-	500	-	620	-	620	h
i	100	100	100	100	100	100	i
j	130	300	130	300	130	300	j
k	-	150	-	150	-	150	k
I	-	150	-	150	-	150	I
m	-	190	-	190	-	190	m
Remark							备注
Explanation							

XTA–I(H)S

Small series

Full servo single cut model

Fit 40 – 200t IMM
More Easy
More Efficient



Basic reference

Model \ Unit	Form of boom	IMM	Length	Width	Height	Power to be consumed	Power supply	Capacity of power supply equipment	Air pressure	Amount of air to be consumed	Type of drive	Minimum pickup time	Full-circulation time (not including fixture)	Maximum load (including fixture)	Post torque	Weight
	-	ton	mm	mm	mm	kw	-	KWA	Mpa	NL/cycle	-	s	s	kg	N.m	kg
XTB-550I(H)S	Single-cut suspension	40-90	1975	1270	1365	0.7	AC single-phase 200V±10% 50/60HZ	1.6	0.6	2.9	Servo drive of walking axle Cylinder drive of other axles	2.5	6.0	4	5	200
XTB-650I(H)S		90-120	2155	1270	1485	0.7		1.6	0.6	2.9		2.5	6.0	4	5	220
XTB-750I(H)S		120-200	2335	1390	1605	0.7		1.6	0.6	2.9		2.5	6.0	4	5	245
XTA-800I(H)S	Double-cut frame	60-250	2440	1500	1670	0.7		1.6	0.6	2.9	Full servo drive	1.5	5.1	8	10	300/330
XTA-900I(H)S		250-380	2440	1710	1400	0.7		1.6	0.6	2.9		1.5	5.1	8	10	310/340

Characteristics of product

>XTA series full servo small models of mechanical hand,
each axis drive using high performance AC servo Ma Da Moving, faster, more accurate, more durable.

>Operating system, the depth of customization, the program can be taught, according to the action demand flexibility of the set To make, with high performance characteristics.


>Application in the production of a short cycle of products out of the application, or applied in a more complex automation

>The series of models using Y axis suspension, Z axis of the structure, in the guarantee of strength and speed of the situation Lower and more economical.

>To meet the production requirements of different moulds by calling the internal procedure quickly.

Household appliance | Electronic | Civilian | Toy

Size & Data

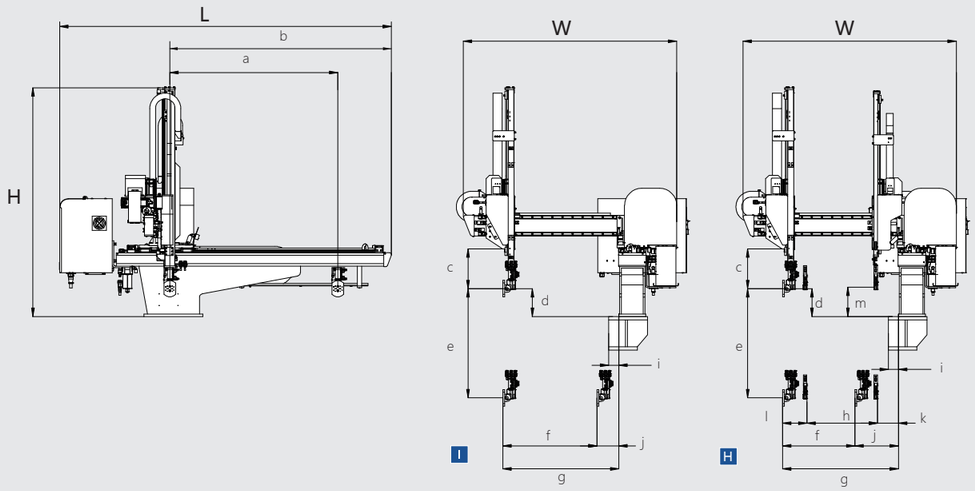

Type	XTA-550		XTA-650		XTA-750		XTA-800		XTA-900		
	XTA-550IS	XTA-550HS	XTA-650IS	XTA-650HS	XTA-750IS	XTA-750HS	XTA-800IS	XTA-800HS	XTA-900IS	XTA-900HS	
a	1000	1000	1200	1200	1400	1400	1400	1400	1600	1600	a
b	1270	1270	1490	1490	1670	1670	1740	1740	1920	1920	b
c	275	275	275	275	275	275	375	375	375	375	c
d	140	140	140	140	140	140	130	130	130	130	d
e	550	550	650	650	750	750	800	800	900	900	e
f	560	430	560	430	680	550	685	500	805	620	f
g	680	680	680	680	800	800	850	850	970	970	g
h	-	430	-	430	-	550	-	500	-	620	h
i	60	60	60	60	60	60	100	100	100	100	i
j	120	255	120	255	120	255	165	350	165	350	j
k	-	115	-	115	-	115	-	150	-	150	k
l	-	140	-	140	-	140	-	200	-	200	l
m	-	170	-	170	-	170	-	180	-	180	m
Remark											Remark
Explanation											

XTA–I(H)D

Small series

Full-servo double-cut frame type model

Fit 60–380t IMM
More efficient
More stable



Basic reference

Model \ Unit	Form of boom	IMM	Length	Width	Height	Power to be consumed	Power supply	Capacity of power supply equipment	Air pressure	Amount of air to be consumed	Type of drive	Minimum pickup time	Full-circulation time (not including fixture)	Maximum load (including fixture)	Post torque	Weight
	-	ton	mm	mm	mm	kw	-	KWA	Mpa	NL/cycle	-	s	s	kg	N.m	kg
XTA-800I(H)D	Double-section frame	60-250	2440	1500	1280	1.2/2.1	AC single-phase 200V+/-10% 50/60HZ	3.0	0.5	2.9	Full servo drive	1.5	5.1	5	10	300/330
XTA-900I(H)D		250-380	2620	1620	1330	1.2/2.1						1.5	5.1	5	10	310/340
XTA-1000I(H)D		250- 380	2620	1740	1345	1.2/2.1						1.5	5.1	5	10	310/340
XTA-800I(H)D/h		60-250	2440	1500	1280	1.8/3.0						0.85	4	1	10	300/330
XTA-900I(H)D/h		250-380	2620	1620	1330	1.8/3.0						0.85	4	1	10	310/340
XTA-1000I(H)D/h		250- 380	2620	1740	1345	1.8/3.0						0.85	4	1	10	310/340

Characteristics of product

XTA series full-servo small models of manipulators are involved, and the AC servo motors of high performance are applied to driving of all axles, with quicker speed, higher precision and more excellent durability.

The operating system is customized deeply, and the program is featured with teachability; the actions can be set flexibly according to the demand of actions; thus, the system has high pick-up characteristics of high performance.


This series machines shall be applicable for pickup of all products having short molding cycle, or the automatic places which are complicated.

This series machines include the model of high-speed machine which can improve the production efficiency greatly due to fast pickup thereof.

This series machines can meet the demand of production of different molds by recalling the internal program quickly.

Household appliance | Electronic | Civilian | Toy

Size & Data

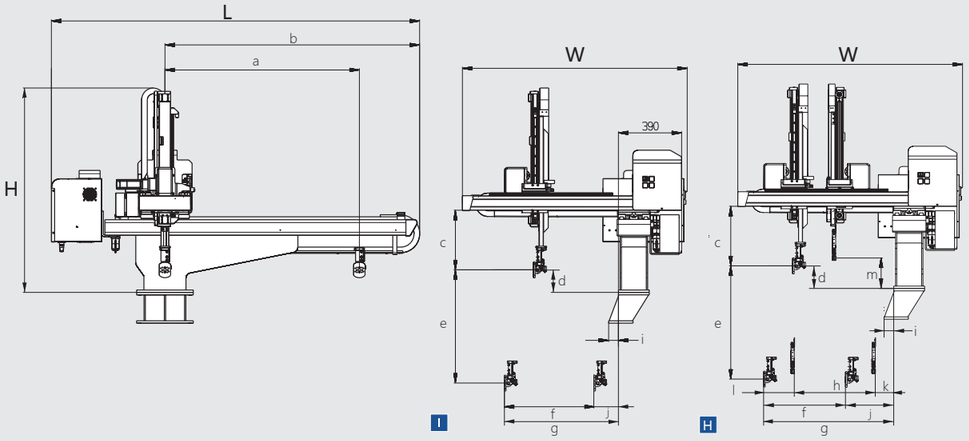

Type	XTA-800		XTA-900		XTA-1000		
	XTA-800ID	XTA-800HD	XTA-900ID	XTA-900HD	XTA-1000ID	XTA-1000HD	
a	1400	1400	1600	1600	1600	1600	a
b	1740	1740	1920	1920	1920	1920	b
c	375	375	375	375	375	375	c
d	130	130	130	130	130	130	d
e	800	800	900	900	1000	1000	e
f	670	480	790	600	790	600	f
g	800	800	920	920	920	920	g
h	-	480	-	600	-	600	h
i	100	100	100	100	100	100	i
j	130	320	130	320	130	320	j
k	-	150	-	150	-	150	k
l	-	170	-	170	-	170	l
m	-	180	-	180	-	180	m
Remark	Include XTA-800I (H) D/h high-speed machine.		Include XTA-900I (H) D/h high-speed machine.		Include XTA-1000I (H) D/h high-speed machine		Remark
Explanation							

XTA–I(H)D

Medium series

Full-servo double-cut frame type model

Fit 380–1300t IMM

More efficient

More stable



Basic reference

Model \ Unit	Form of boom	IMM	Length	Width	Height	Power to be consumed	Power supply	Capacity of power supply equipment	Air pressure	Amount of air to be consumed	Type of drive	Minimum pickup time	Full-circulation time (not including fixture)	Maximum load (including fixture)	Post torque	Weight
	-	ton	mm	mm	mm	kw	-	KWA	Mpa	NL/cycle	-	s	s	kg	N.m	kg
XTA-1100I(H)D	Double-section frame	380-530	2995	1965	1800	2.1/3.2	AC 单相 200V±10% 50/60HZ	3.0	0.6	15	Full servo drive	2.3	6.3	8	7.3	400/450
XTA-1300I(H)D		530-700	3155	2145 (1965)	1760	2.1/3.2		3.0	0.6	15	Full servo drive	2.5	6.5	8	7.3	435/485
XTA-1500I(H)D		700-1000	3847	2480	1935	2.3/3.5	AC three-phase 200V±10% 50/60HZ	3.0	0.6	24	Full servo drive	2.5	7.0	15	21	920/995
XTA-1700I(H)D		1000-1300	3847	2480	2065	2.3/3.5		3.0	0.6	24	Full servo drive	2.5	7.0	15	21	935/1020

Characteristics of product

>XTA series full-servo medium models of manipulators are involved; and the AC servo motors of high performance are applied to driving of all axles, with quicker speed, higher precision and more excellent durability.

>The operating system is customized deeply, and the program is featured with teachability; the actions can be set flexibly according to the demand of actions; thus, the system has high pick-up characteristics of high performance.

>This series machines shall be applicable for pickup of all products having short molding cycle, or the automatic places which are complicated.


>This series machines include the model of high-speed machine which can improve the production efficiency greatly due to fast pickup thereof.

>This series machines can meet the demand of production of different molds by recalling the internal program quickly.

>This series machines can meet the need of the customer with great load on the premise that the speed is ensured.

Automotive | Household appliance | Electronic | Civilian | Toy

Size & Data

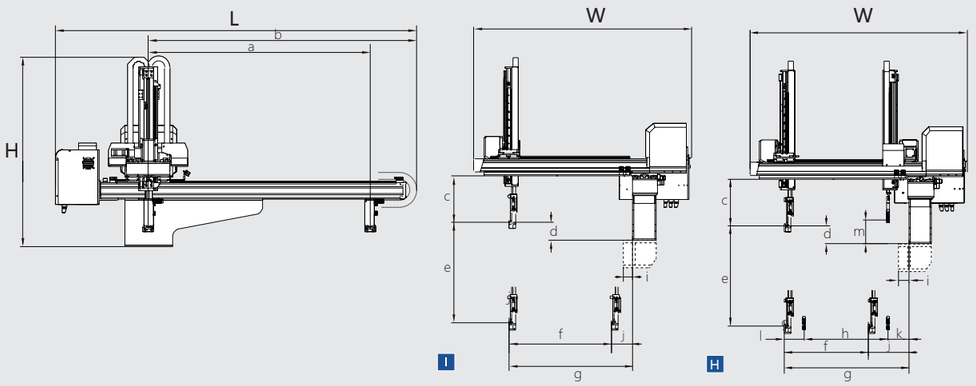

Type	XTA-1100		XTA-1300		XTA-1500		XTA-1700		
	XTA-1100ID	XTA-1100HD	XTA-1300ID	XTA-1300HD	XTA-1500ID	XTA-1500HD	XTA-1700ID	XTA-1700HD	
a	1800	1800	2000	2000	2500	2500	2500	2500	a
b	2165	2165	2365	2365	3107	3107	3107	3107	b
c	440	440	440	440	550	550	550	550	c
d	190	190	190	190	128	128	128	128	d
e	1100	1100	1300	1300	1500	1500	1700	1700	e
f	1050	830	(1050)1230	(830)1010	1320	1120	1320	1120	f
g	1180	1180	(1180)1360	(1180)1360	1415	1445	1415	1445	g
h	-	830	-	(830)1010	-	1120	-	1120	h
i	100	100	100	100	100	100	100	100	i
j	130	350	130	350	95	325	95	325	j
k	-	120	-	120	-	135	-	135	k
I	-	230	-	230	-	190	-	190	I
m	-	205	-	205	-	138	-	138	m
Remark									Remark
Explanation									

XTA–I(H)D

Large series

Full-servo double-cut frame model

Fit 800–4500t IMM
More efficient
More stable



Basic reference

Unit / Model	Form of boom	IMM	Length	Width	Height	Power to be consumed	Power supply	Capacity of power supply equipment	Air pressure	Amount of air to be consumed	Type of drive	Minimum pickup time	Full-circulation time (not including fixture)	Maximum load (including fixture)	Post torque	Weight
-		ton	mm	mm	mm	kw	-	KWA	Mpa	NL/cycle	-	s	s	kg	N.m	kg
XTA-1800I(H)D STAR	Double-section frame	800-1600	3042	3256	2195	2.1/5.0	Three-phase AC single-phase 200V+/-10% 50/60HZ	3.85	0.5	15	Full servo drive	3.5	10.8	35	88	1274/1341
XTA-2000ID STAR		1600-4000	5000	3937	2769	4.0		5.0	0.5	15	Full servo drive	3.8	12.5	40	64	2630
XTA-3000tHD		2100-4000	6922	4088	3398	4.0		15.125	0.5	28	Full servo drive	18	55	80	123	4500

Characteristics of product

>XTA series full-servo large models of manipulators are completed in presence of cooperation of Haitian Drive and STAR Precision Machine in Japan; the STAR high-end technology is taken to meet the need of the customer with high load.

>Three (five)-axle full-servo motor is applied to driving, with high speed rate, low noise, precise location, strong controllability during running, etc.


>The main parts are imported from Japan; therefore, the quality of the whole machine can be ensured.

>Original STAR manipulator is featured with graphic section and more humanized.

>The XTA-3000HDt machine with double main booms is developed independently after many years of technical accumulation and precipitation, and is popular with the customers in automobile industry due to its higher loading ability.

Automotive | Logistics | Household appliance | Civilian

Size & Data

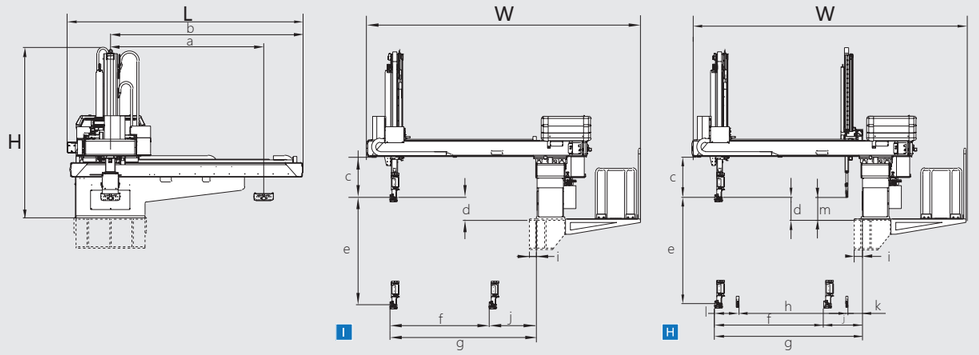


Type	XTA-1800		XTA-2000	XTA-3000	
	XTA-1800ID	XTA-1800HD	XTA-2000ID	XTA-3000tHD	
a	2500	2500	3600	4500	a
b	2516	2516	4300	5560	b
c	550	550	761.5	763	c
d	255	255	403	400	d
e	1800	1800	2000	3000	e
f	1290	1115	1600	1620	f
g	1500	1500	2150	2696	g
h	-	1115	-	1620	h
i	100	100	100	0	i
j	210	385	550	1076	j
k	-	75	-	345	k
l	-	310	-	731	l
m	-	300	-	430	m
Remark				Note: XTA-3000tHD refers to the machine having double main booms, and the XTA-3000ID can be customized.	Remark
Explanation					

XTD-ID

Open series

Full-servo cow-head-type model

Fit 700–4500t IMM
More efficient
More stable

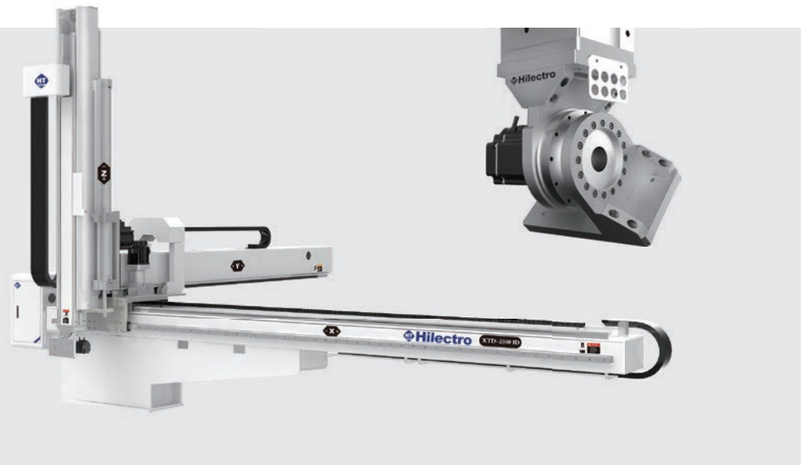

Basic reference

Model \ Unit	Form of boom	IMM	Length	Width	Height	Power to be consumed	Power supply	Capacity of power supply equipment	Air pressure	Amount of air to be consumed	Type of drive	Minimum pickup time	Full-circulation time (not including fixture)	Maximum load (including fixture)	Post torque	Weight
	-	ton	mm	mm	mm	kw	-	KWA	Mpa	NL/cycle	-	s	s	kg	N.m	kg
XTD-1500ID	Open type	700-1000	3745	2450	2000	2.3	AC single-phase 200V+/-10% 50/60HZ	5.0	0.6	24	Full servo drive	3.84	7.0	15	21	1210
XTD-1800ID	Open type	800-1600	4200	2200	2370	4.0	Three-phase AC single-phase 200V+/-10% 50/60HZ	7.8	0.6	24	Full servo drive	2.53	10.7	30	33	1248
XTD-2500ID	Open type	1600-4000	5150	3595	3027	4.0		7.8	0.6	24	Full servo drive	5.6	20.4	40	64	1750
XTD-3000ID	Open type	2100-4500	5670	3544	3522	4.0		7.8	0.5	180	Full servo drive	9	32	80	123	2650

Characteristics of product

>The XTA series full-servo manipulators are out of the frame structure, with more flexible and reliable actions and wider scope of application.


>The upper unit and the lower unit are manufactured from the high-rigidity aluminium sections; moreover, the manipulator is featured with compact structure and beautiful appearance after combining with the double-section speed-doubling design.


>The cow-head-type structure is taken, and the gravity is placed backward; therefore the boom is shorter, the machine has higher durability, and more application space for jig is increased.

>Movement in more dimensions can be implemented by expansion of the terminal; thus, the manipulator can be applied to the complicated application places.

Automotive Logistics Household appliance Civilian

Size & Data

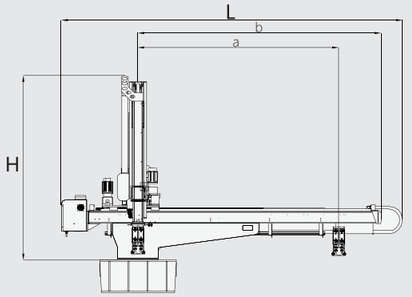



Type	XTD-1500ID	XTD-1800ID	XTD-2500ID	XTD-3000ID	Type
a	2500	2500	3500	4000	a
b	2855	2990	3915	5460	b
c	523	660	593	601	c
d	200	65	366	358	d
e	1500	1800	2500	3000	e
f	1340	1200 1400	2200	2200	f
g	1632	1600 1800	2680	2671	g
h	292	400	480	471	h
n	1907	1820 2050	3180	3087	n
Remark					Remark
Explanation					



XTS

Side-take series

Fast-food box side-take model



Faster

The XTS series side-take manipulators are researched and developed in allusion to the disposable lunch box industry. This series manipulators can be matched with the high-speed injection molding machine to pick out and stack the disposable lunch boxes, which can meet the production demand of this industry and improve the production efficiency.

Major specifications

XTS-1100ID	VE150-210t
XTS-1300ID	VE230-330t

*Please see the product page for specific parameters.





XTC

vertical-travel series

The utilization rate of the plant can be improved and the products can be produced by means of the flow line due to vertical pickup of the injection molding machine.

Major specifications

XTC-800	60-250t
XTC-900	250-380t
XTC-1100	380-530t
XTC-2000	1600-4000t


*Please see the product page for specific parameters.


More efficient

The XTC vertical-travel machine launched can improve the utilization rate of the plant and save the branch conveyor belt and is more useful for using the flow line production of the product.

>The utilization rate of space can be improved for 20% when compared with the transverse-travel machine.

>The vertical-travel machine refers to the double-color machine system, which can provide the perfect solution.

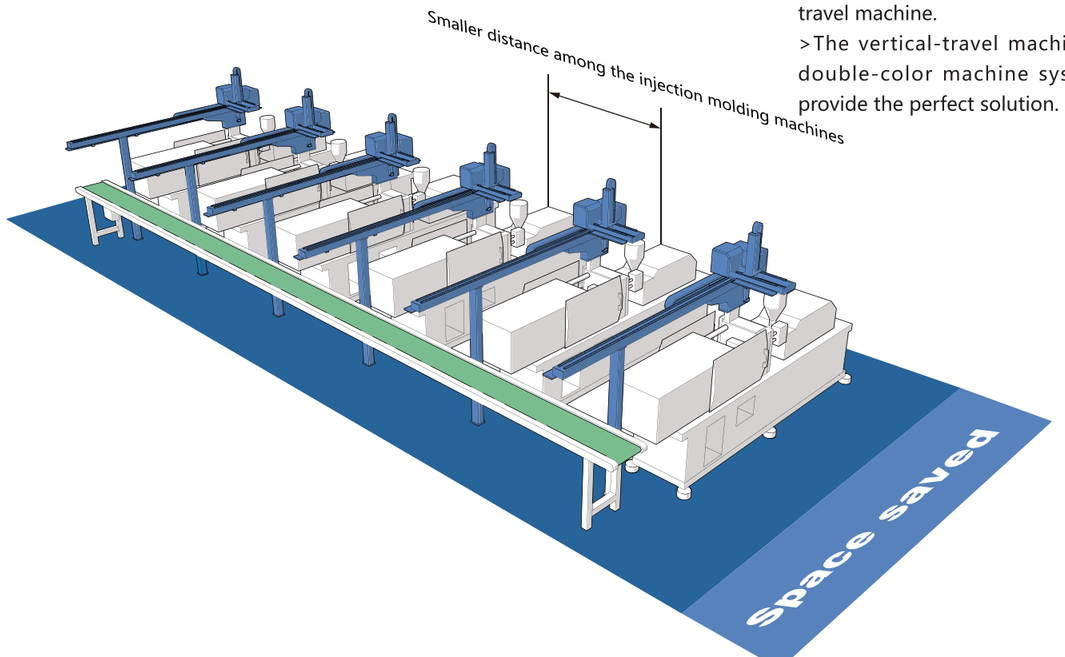


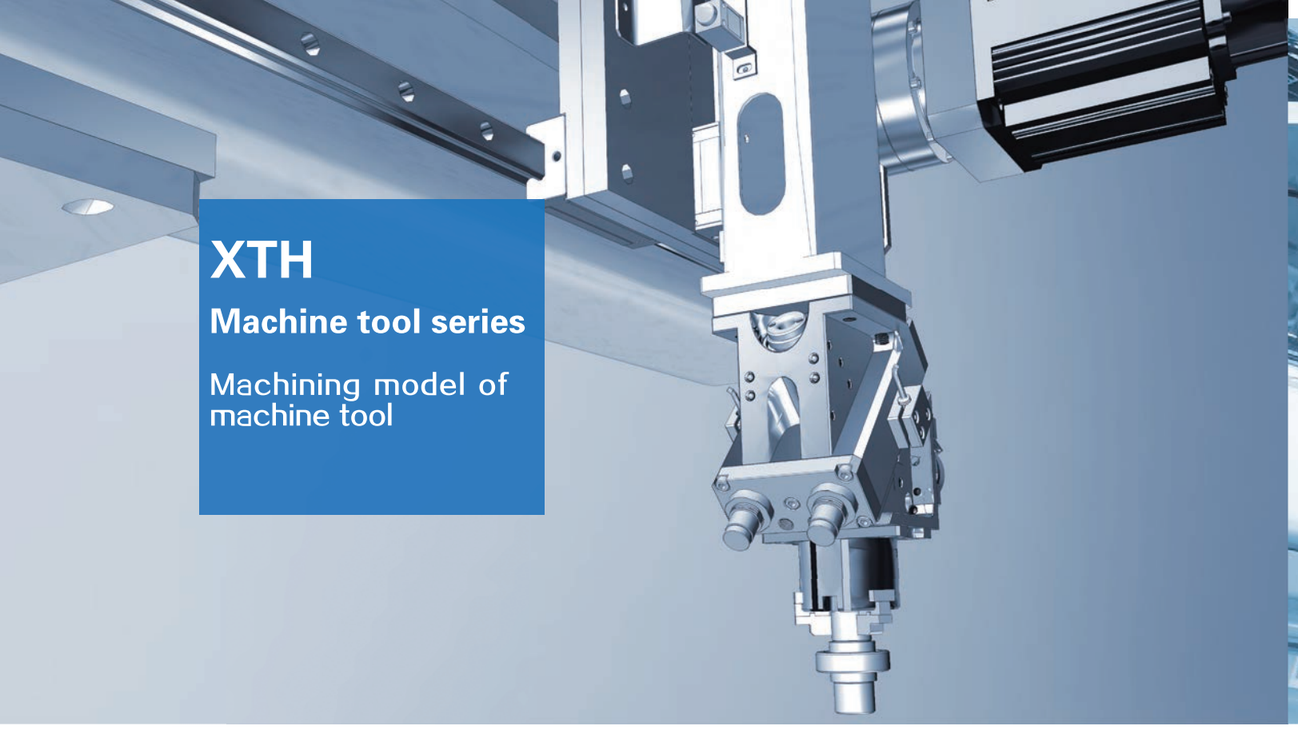

XTH

Machine tool series

Machining model of machine tool

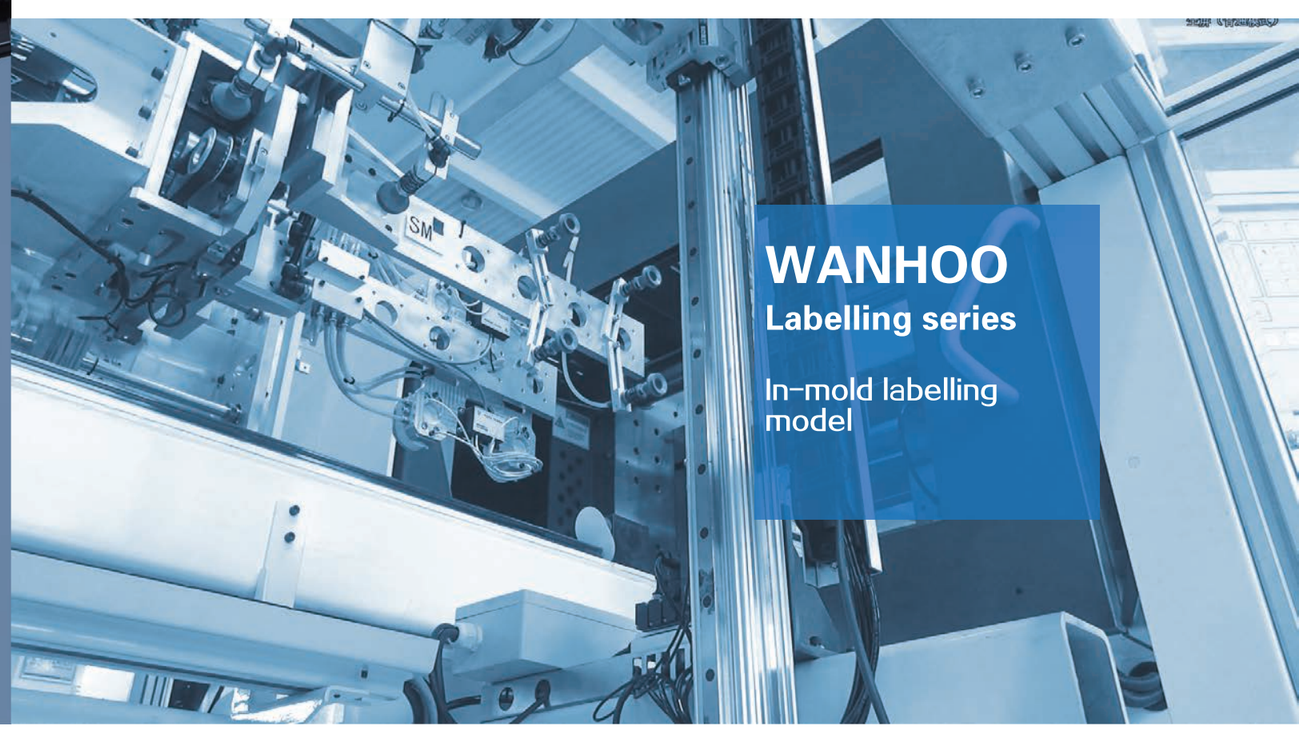


WANHOO

Labelling series

In-mold labelling model

New opportunity ， new direction

XTH series models are the integrated truss manipulator to be applied to the industry of machine tool. The one-for-two deployment way is taken by this series of machines, and one manipulator can complete loading and unloading of materials automatically of two machine tools and is especially Fit the places of short processing rhythm and great production lot.

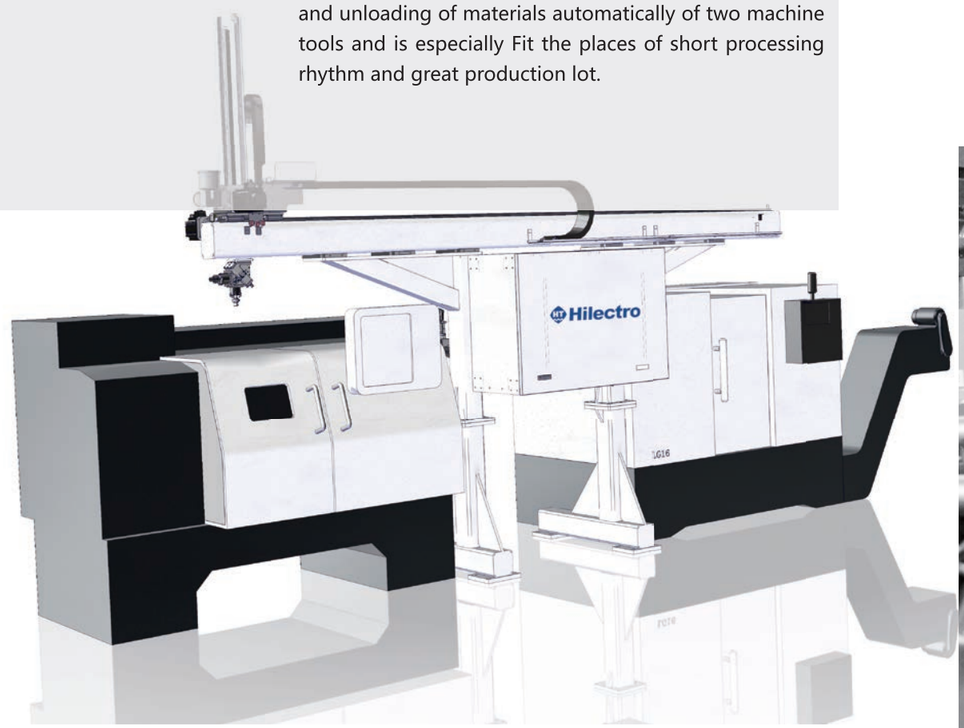


Major Parameters

Maximum speed	3.6m/s
Retention time in mold	1.6s
Null cycle time	3.5s
Drop rate	$1^{0}/_{00}$


*Please see the product page for specific parameters.



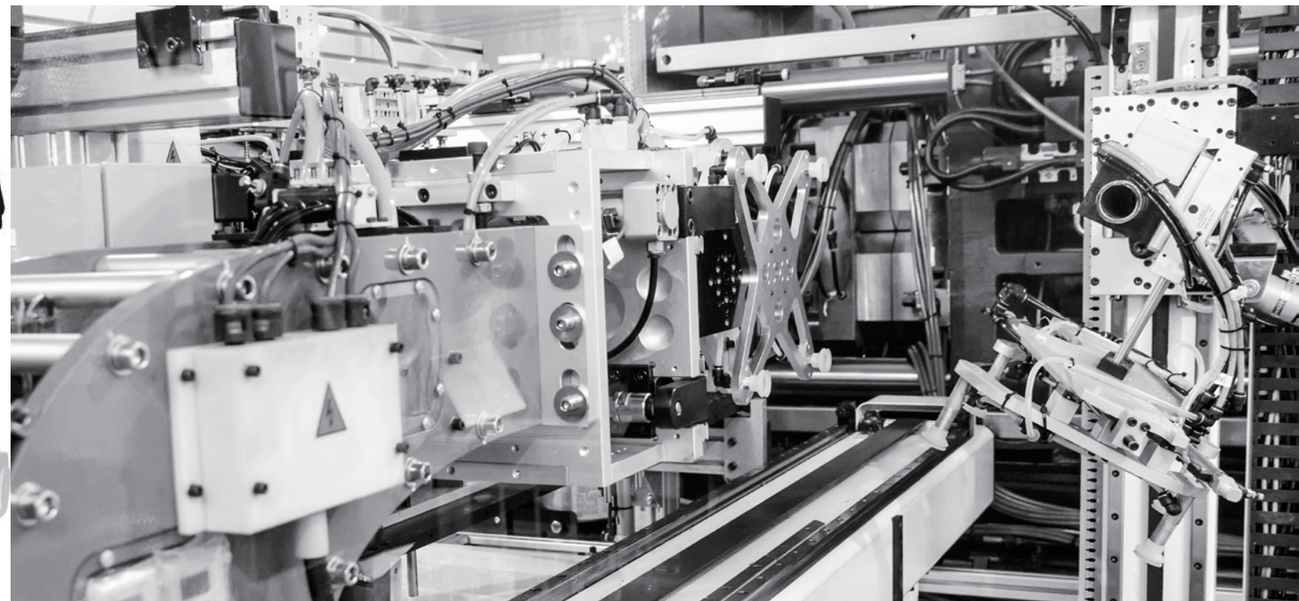

Manipulator terminal extension



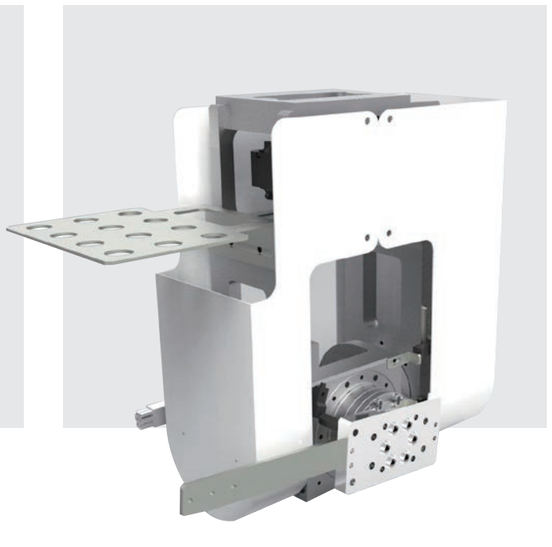





Integral rolling-over

Applicable type	Load capacity (kg)
800	4
1100	8

AC Axes


Applicable type	Load capacity (kg)
1100	8
1500	30
2000	40

B Axes

Applicable type	Load capacity (kg)
1100	8

C Axes

Applicable type	Load capacity (kg)
800	8
1100	30
1500	15
1800	30
2000	40/60

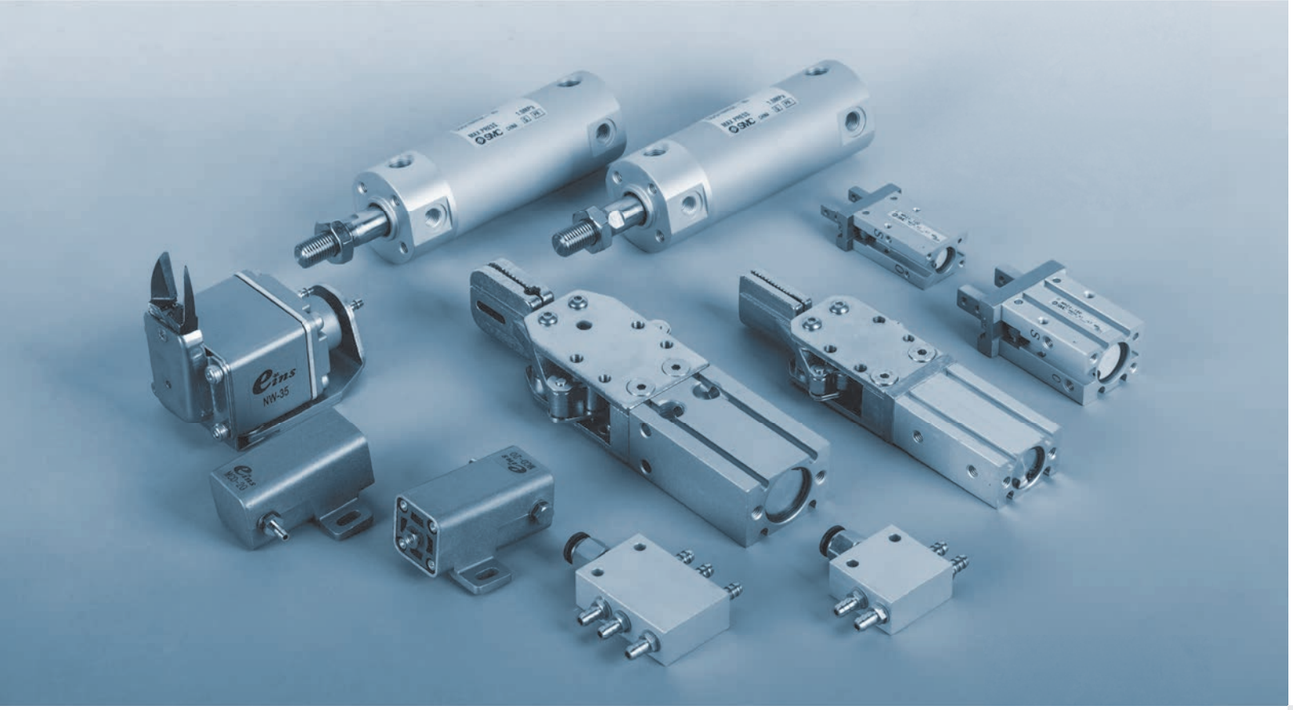

Super Accessory, Top quality .


brand servo motor,driver, Pneumatic accessory, High quality metal fitting and adsorbent

High class product is based on wonderful accessory, The all pneumatic accessory, electric elements are applied with Japanese ,Germany brand.
With high quality and good reputation. The mechanical parts are applied with foreign top steel materials, and processed with advanced equipment. In this way, we commit to building high quality products.




Fixture program

Manipulator terminal fixture program

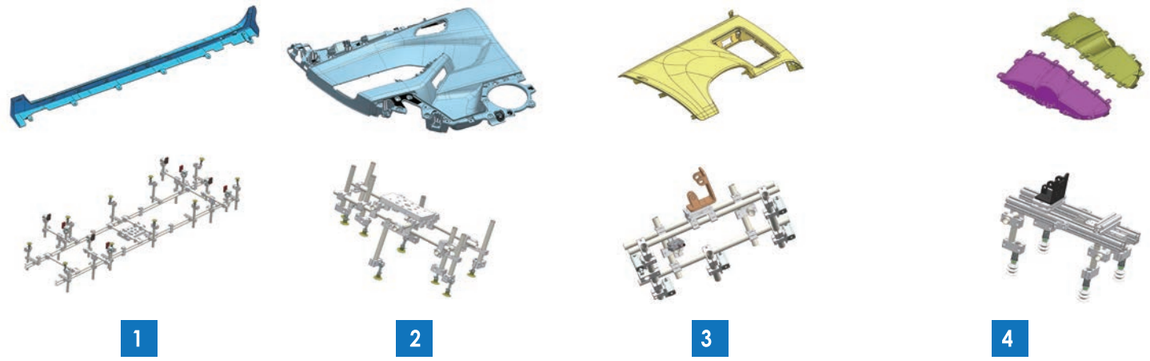


1 2 3 4

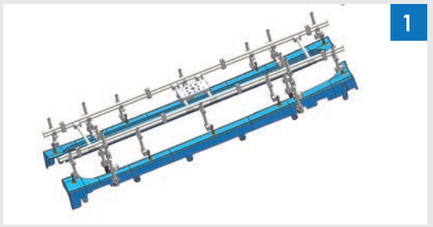


1

Description: The products belong to rib form, with a certain circular measure, and apply with stainless steel for fame-works, to make sure its solid and strength requirement, meanwhile, may adjust adsorbent angle to make perfect level adsorbing effect.piston seizure may assist to carry the products steadily.

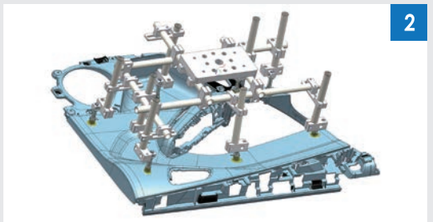


2

Description: the product is designed with irregular surface and max circular changes. And apply with stainless steel tube for frames works, connecting for adjustable adsorbing angle to make the best adsorbing effect

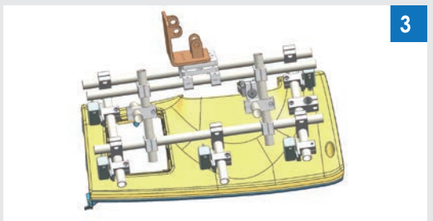

3

Description: with irregular design , and stainless steel tube for frame-works, meanwhile, the mold’ s ejection distance is limited, and applied with adsorbing tank to make automatically. And also apply optional nozzle gripper to carry the handles of the products.

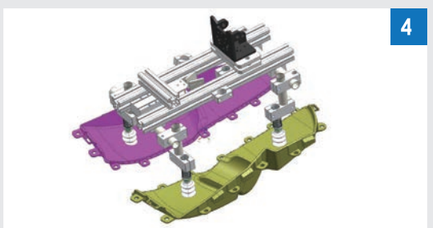

4

Description: The product is designed with irregular parts, but may adsorb between level parts, then apply aluminum for frame-works to ensure its steadiness. Optional gripper may carry dual channel with inspecting signal .

Configuration DATA

Configuration Item	Description
Standby through manipulator dropping-down	Before module-making, the gripper may standby near the module to shorten carrying time. Also, may set up standby position.
Taking-out and lateral postural controlling	Through postural controlling on the safety door, may take out and carry the standing rib-form products. Avoiding barrier and traveling axial on the mold-making, may fit postural position freely.
Postural controlling during moving	For moving postural controlling, may preset reversing action in advance to shorten cycle time.
Production management	Based on Production schedule,through setting up production schedule, may validate factual quantity and productivity. Also , may predict production finishing time. Also applicable fitting up on finish goods discharging in initial phases, sampling inspection, automatic shutoff when production finished.
Maintenance	May display periodic inspection time and items, also oiling points and time of axes, and check periodic inspecting and oiling time.
Applicable CF Card /U disk	May take manipulator’ s configuration data (mode, time, axes position and packing)as periodic data to manage through internal storage, for inputting, drawing up, comparing and deleting within shortening time.
Adsorbing confirmation	Equipped with 1 set vacuum unit
Gate dropping while moving	When 3- plate mold production, the gate may open while moving forward.
Packing	Through driven by conveyor belt and case packer to pack for finished products
Alarming records application	May record history alarming events.
Web Application	Only need link with Lan (Internet), may display manipulator’ s station and acting situation and print through web.
NC Procedure application	NC procedure application, through editor, may edit programs and add necessary projects.
Easy NC setting	Easy setting up on NC procedures. During operation, may specify insert location. May adjust and alter NC critical point and time.
Connecting with computer	After installing on the computer, may connect through USD, transfer data and print files and edit the programs.
Power-saving application	Applicable power-saving mode
Memory mode	External memory (999 mode)
EU Standard	EU Standard 12
Match plate inspection	Fitting in with 2-plate mold, may check match plate mold if in place safely.
Applicable language	Chinese/Japanese

Optional configuration

Configuration Item	Description
Defective goods discharging	May take defective products away, and cut down labor forces
Flexible moving switcher	Standardizing machine may take out finish product from moving mold. May switch to flexible moving, if switch to fixing side, may take out finish products from the mold.
Standby outside	If mold-making under production,to avoid barrier on manipulator or gripper plate, may fitted to standby while reverting move until mold-making finished.
Adjustable packing position	May set up finish products packing sites. Applicable 1024 resolution (1 phase MAX 256 resolution).
Slide moving back	Applicable for taking out products from slump structure molds. If add this application, may hold the products to carry the products from gripper.
Free shift clipping	If unable to clip directly, may trans-locate and clip through double loop kits.
Multiple processing site	May take 1-4 processing site, with corresponding signal, adsorbed by 4 loops.
Internal clip loop of gripper	Under automatic operation, the gripper may clip after the products are taken away.
Mold closing while uprising	Wile uprising, make mold closing to shorten operating time and cycle time.
Falling off while mold-making	While mold-making, take the arm into molds to shorten mold-close time and operating time.
Rotating application	The gripper may rotate automatically. May adjust internal, external and falloff freely.
Alarming light	While emergency occurs, the alarming lights on the manipulator may blink in time.
Automatic changing- kit loop	Plug-in type changing-kit loop
EU Standard	EU Standard 67
Applicable language	Chinese/English

Multiple adsorbent, loop-gripper unit, applicable 4 vacuum loop, 2 loop-gripper, may adjust operation freely.



Integral Delivery system


Flow–line production


To build a modern and innovative factory

Highly innovative


Highly intelligent

Highly effective

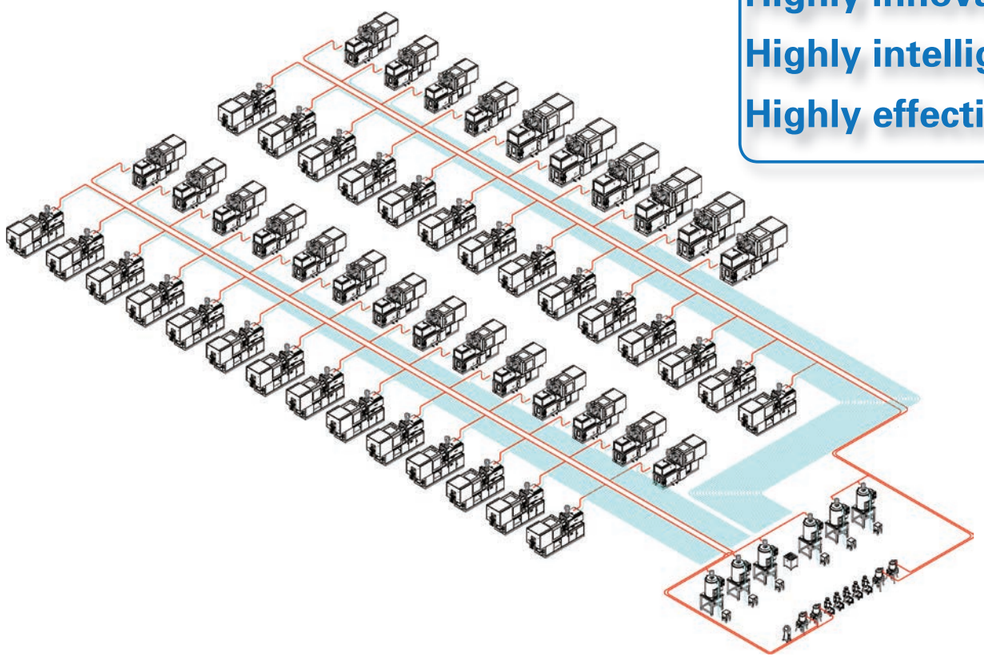


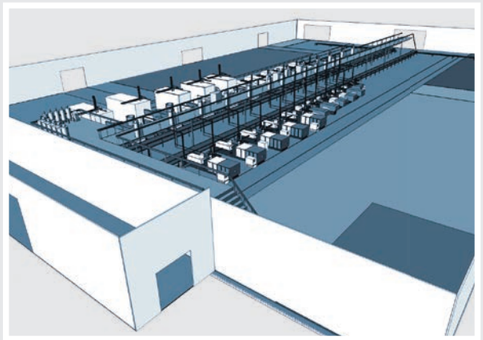


Layout of new workshop for integral delivery system

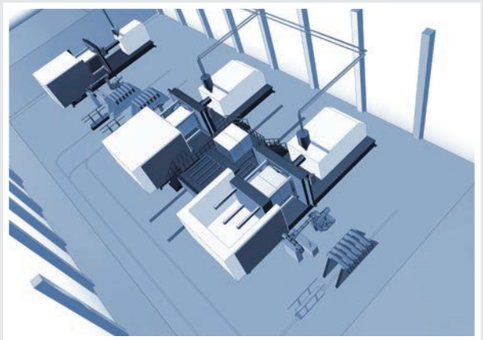

AGV, Mold exchanging platform

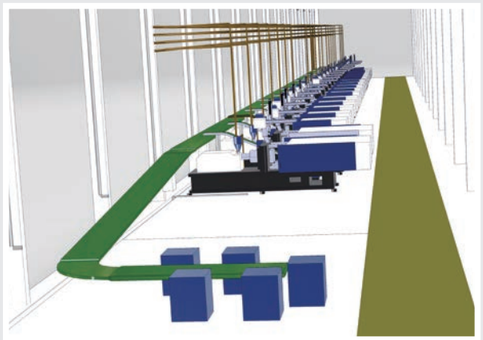

Layout of workshop’s flow–line

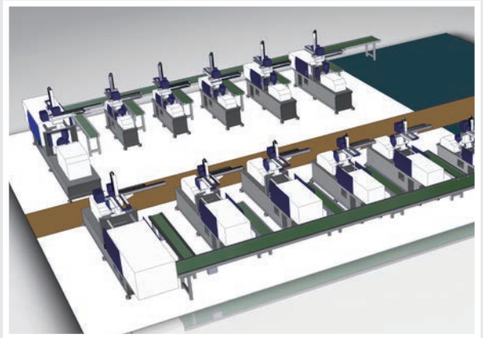

Layout of equipment



Leading Automatic manufacturer

To update out-date production line

Highly intelligent


Highly effective

Highly steady

We , the leader of professional automation solution

We are specialized in injection molding, manipulator, also devotes to offer full-part service and professional automation solution to meet the clients' automation requirement in this field. In addition, through enhancing productivity and quality for clients, we work to assist the clients to win the market.


We strive to cooperate with robot manufacturer , in such way, we make efforts to provide automation solution.

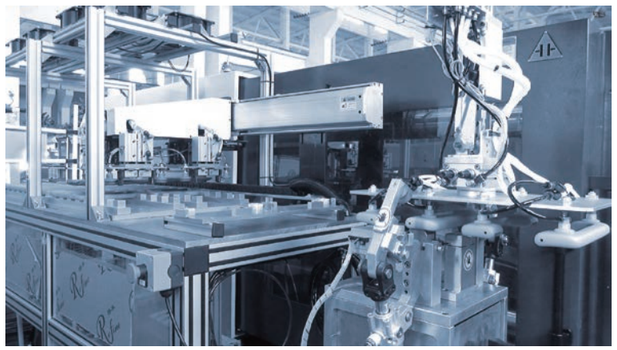


▲ Auto door–handle trimming, adjusting molds and sorting



▲ Switch–on relay carrying, combination and sorting

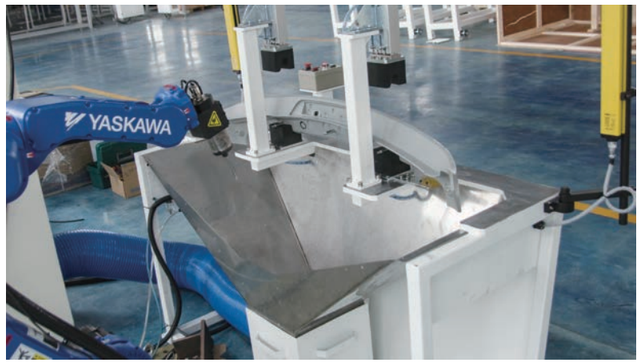


◀ Perforation of car spoiler

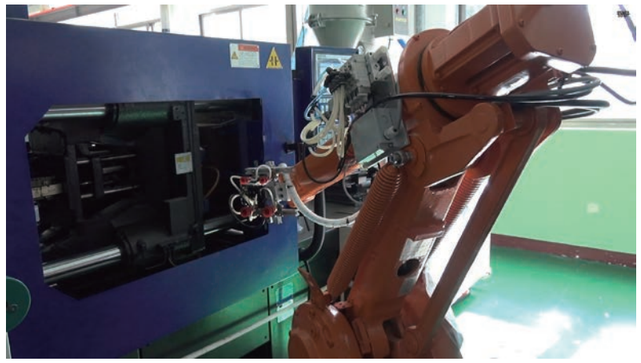

◀ Mechanical siding pickup



◀ Mechanical up–side pickup, LD Clipping, dual flow–line.

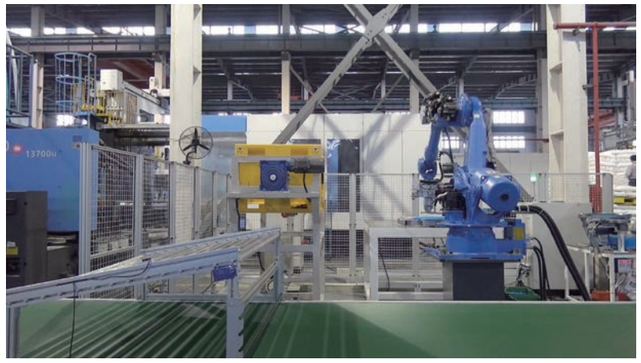

◀ Mechanical trimming remnants, inserts and over–turns.

Note

Note