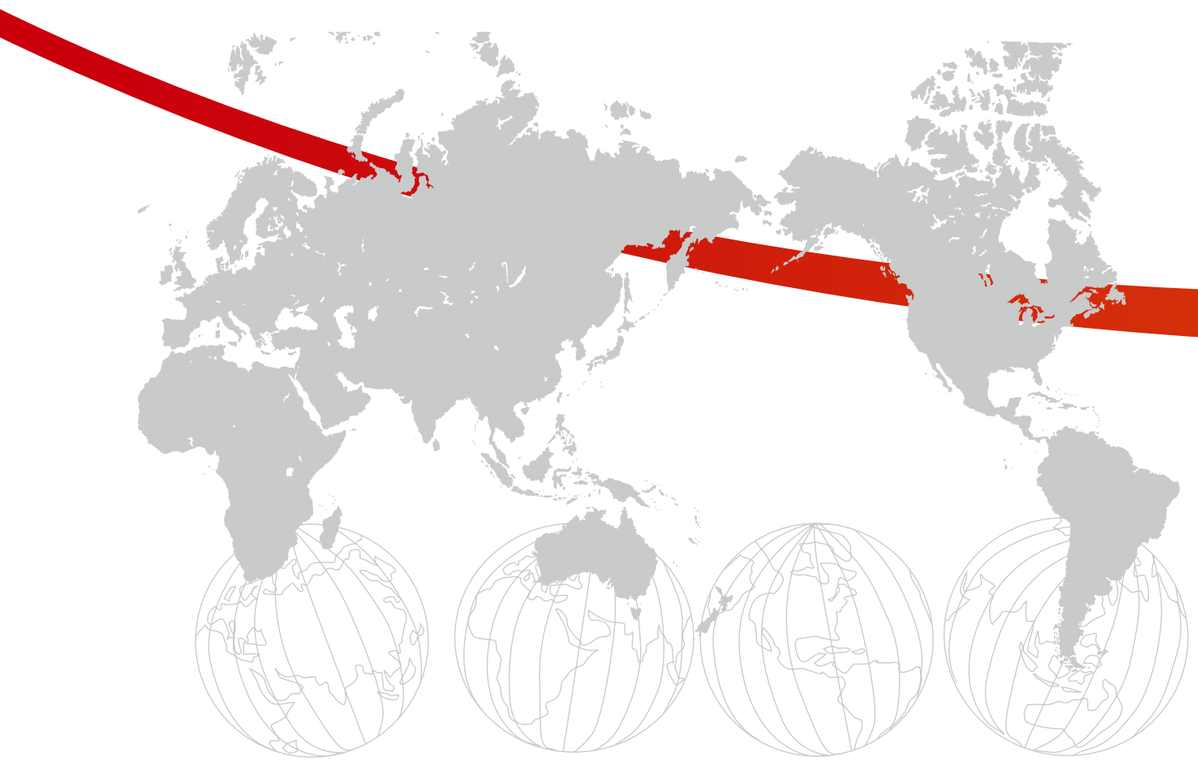


ZHAFIR PLASTICS MACHINERY GMBH
Jubatus-Allee 8-10
92263 Ebermannsdorf
Germany
Tel. +49-9438-9412-0
Fax. +49-9438-9412-150
E-Mail: contact@zhafir.com
www.zhafir.com

NINGBO ZHAFIR PLASTICS MACHINERY CO., LTD
No. 299 Lehai Road, Chunxiao, Beilun, Ningbo, P.R. China 315800
Tel. +86-574-86182986
Fax. +86-574-86182977
E-Mail: contact@mail.zhafir.cn
www.zhafir.cn

ZF 20150126-IV

Zhafir **Venus** II Series

ZHAFIR
PLASTICS MACHINERY

Zhafir Venus 2 Series

Specifications / International

400-6500kN



A Member of Haitian International

We Extend Advantage.

Technical data **VE400 Ⅱ**

CLAMPING UNIT		VE400 Ⅱ
Clamping force	kN	400
Toggle stroke	mm	235
Min. mold height	mm	150
Max. mold height	mm	320
Max. mold opening stroke	mm	555
Space between tie bars H×V	mm	320×280
Min. mold dimension	mm	205×180
Ejector stroke	mm	60
Ejector force	kN (tf)	9.8 (1.0)
Mold platen dimension H×V	mm	460×440


		A	B	A	B	C
Screw diameter	mm	16	19	19	22	26
Screw L/D ratio	L/D	21	20	20	20	17
Injection volume (theoretical)	cm^3	12	17	21	36	50
Injection weight (PS)	g	11	15.5	19.1	32.8	45.5
Screw speed	rpm	400		400		
Plasticizing capacity (PS)	g/s	2.5	3.8	3.8	6.0	8.8
Nozzle contact force	kN (tf)	9.8 (1.0)		9.8 (1.0)		
Heating power	kW	3.2	4.1	4.1	5.0	5.0
INJECTION UNIT		**50**		**80**		
Injection speed	mm/s	200		200		
Injection rate (PS)	g/s	36	50	50	68	96
Injection pressure	Mpa	280	260	260	220	157
	bar	2800	2600	2600	2200	1570
Holding pressure	Mpa	234	198	208	175	125
	bar	2340	1980	2080	1750	1250
INJECTION UNIT		**50h**		**80h**		
Injection speed	mm/s	350		350		
Injection rate (PS)	g/s	64	90	90	121	169
Injection pressure	Mpa	280	260	260	220	157
	bar	2800	2600	2600	2200	1570
Holding pressure	Mpa	234	198	208	175	125
	bar	2340	1980	2080	1750	1250

OTHERS			
Connection power	kW/A	50:10/18 50h:14.5/26	80:12/21.4 80h:19/34
Hopper capacity	l	15	15
Machine dimension	m	3.62×1.2×1.75	3.62×1.2×1.75
Machine weight	t	2.8	2 8

We reserve the right to make changes as a result of further technical advantages.


Machine dimensions VE400 Ⅱ

unit: mm

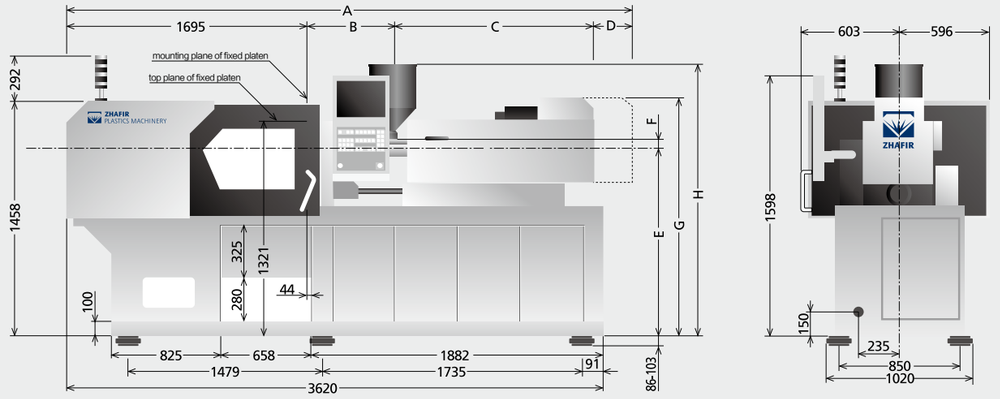

Platen dimensions VE400 Ⅱ

unit: mm

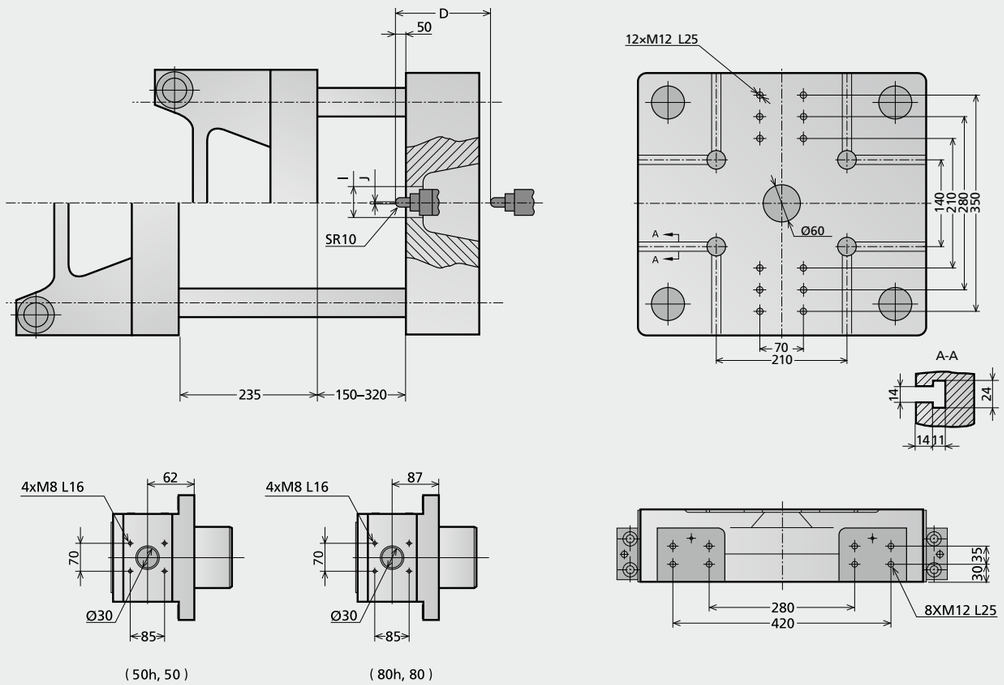

(50h, 50) (80h, 80)

	A	B	C	D	E	F	G	H	I	J
80h, 80	3563	467	1136	265	1104	182	1530	1735	Ø100	Ø2.2
50h, 50	3507	421	1096	265	1104	175	1530	1763	Ø100	Ø2.2

Technical data **VE600 II**

CLAMPING UNIT		VE600 II
Clamping force	kN	600
Toggle stroke	mm	270
Min. mold height	mm	150
Max. mold height	mm	370
Max. mold opening stroke	mm	640
Space between tie bars H×V	mm	370×320
Min. mold dimension	mm	240×205
Ejector stroke	mm	70
Ejector force	kN (tf)	19.6 (2.0)
Mold platen dimension H×V	mm	545×505


		A	B	C	A	B	C
Screw diameter	mm	19	22	26	22	26	30
Screw L/D ratio	L/D	20	20	17	20	20	17.4
Injection volume (theoretical)	cm^3	21	36	50	36	58	78
Injection weight (PS)	g	19.1	32.8	45.5	33	52	70
Screw speed	rpm		400			400	
Plasticizing capacity (PS)	g/s	3.8	6.0	8.8	6.0	8.8	13
Nozzle contact force	kN (tf)		14.7 (1.5)			14.7 (1.5)	
Heating power	kW	4.1	5.0	5.0	5.3	6.8	6.8
INJECTION UNIT			**80**			**120**	
Injection speed	mm/s		200			200	
Injection rate (PS)	g/s	50	68	96	69	96	128
Injection pressure	Mpa	260	220	157	280	220	165
	bar	2600	2200	1570	2800	2200	1650
Holding pressure	Mpa	208	175	125	220	160	120
	bar	2080	1750	1250	2200	1600	1200
INJECTION UNIT			**80h**			**120h**	
Injection speed	mm/s		350			350	
Injection rate (PS)	g/s	90	121	169	121	169	225
Injection pressure	Mpa	260	220	157	280	220	165
	bar	2600	2200	1570	2800	2200	1650
Holding pressure	Mpa	208	175	125	220	160	120
	bar	2080	1750	1250	2200	1600	1200

OTHERS			
Connection power	kW/A	80:12/21.4 80h:19/34	120:15.1/27 120h:25/44.7
Hopper capacity	l	15	15
Machine dimension	m	3.74×1.22×1.8	3.86×1.22×1.8
Machine weight	t	3.3	3.5

We reserve the right to make changes as a result of further technical advantages.


Machine dimensions VE600 II

unit: mm

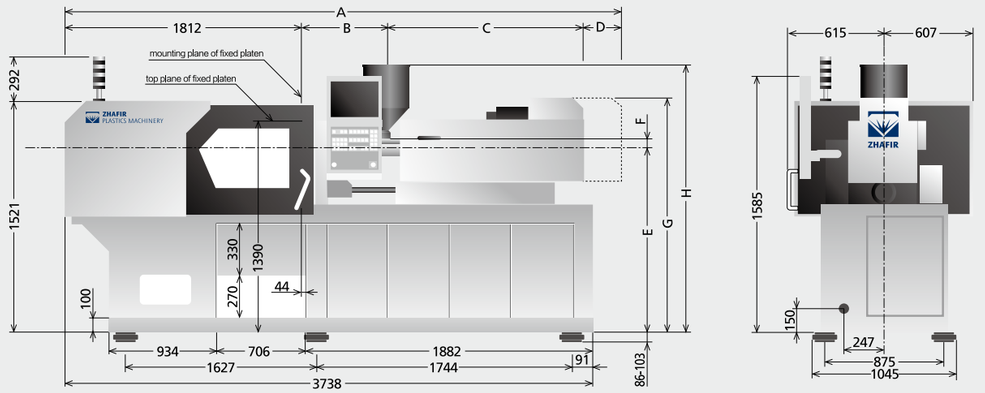

Platen dimensions VE600 II

unit: mm

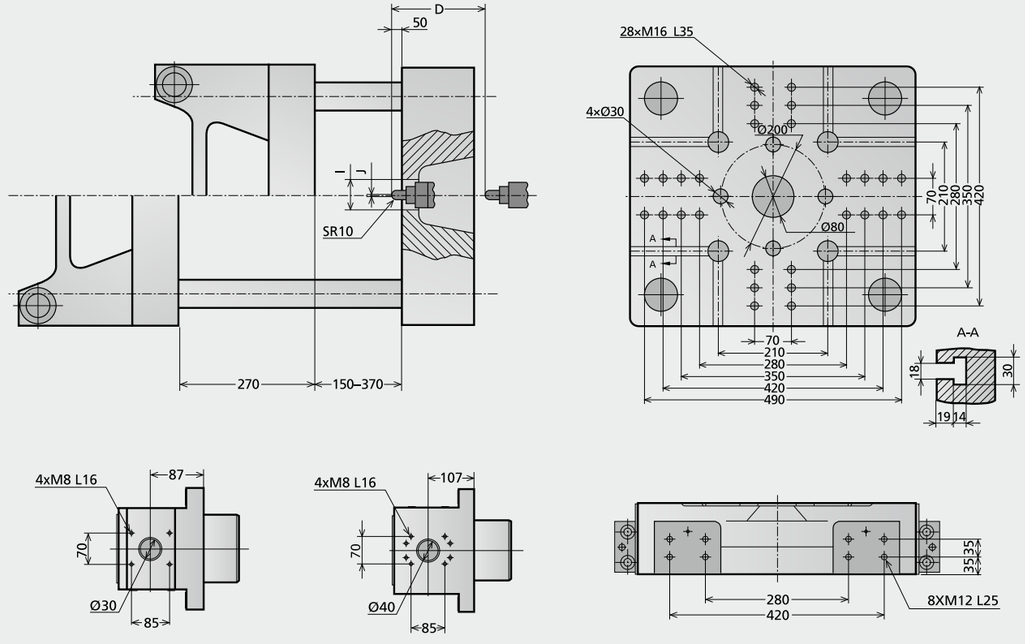

	A	B	C	D	E	F	G	H	I	J
120h, 120	3861	578	1181	290	1135	187	1586	1845	Ø100	Ø2.5
80h, 80	3705	467	1136	290	1135	182	1561	1766	Ø100	Ø2.2

Technical data **VE900 Ⅱ**

CLAMPING UNIT		VE900 Ⅱ
Clamping force	kN	900
Toggle stroke	mm	320
Min. mold height	mm	150
Max. mold height	mm	410
Max. mold opening stroke	mm	730
Space between tie bars H×V	mm	420×370
Min. mold dimension	mm	270×240
Ejector stroke	mm	80
Ejector force	kN (tf)	19.6 (2.0)
Mold platen dimension H×V	mm	615×570


		A	B	C	A	B	C	AA	A	B	C
Screw diameter	mm	22	26	30	26	28	30	26	28	32	36
Screw L/D ratio	L/D	20	20	17.4	21	21	19.6	21	21	21	18.6
Injection volume (theoretical)	cm^3	36	58	78	58	67	78	61	70	100	127
Injection weight (PS)	g	33	52	70	52	61	70	55	64	91	116
Screw speed	rpm	400			400			400			
Plasticizing capacity (PS)	g/s	6.0	8.8	13	8.8	11	13	8.8	11	16	22
Nozzle contact force	kN (tf)	19.6 (2.0)			19.6 (2.0)			19.6 (2.0)			
Heating power	kW	5.3	6.8	6.8	6.8	7.8	7.8	5.4	7.5	8.0	8.0
INJECTION UNIT		**120**			**160**			**210**			
Injection speed	mm/s	200			200			200			
Injection rate (PS)	g/s	69	96	128	96	112	128	96	112	146	185
Injection pressure	Mpa	280	220	165	260	220	192	280	260	200	160
	bar	2800	2200	1650	2600	2200	1920	2800	2600	2000	1600
Holding pressure	Mpa	220	160	120	160	138	120	224	206	160	126
	bar	2200	1600	1200	1600	1380	1200	2240	2060	1600	1260
INJECTION UNIT		**120h**			**160h**			**210h**			
Injection speed	mm/s	350			350			350			
Injection rate (PS)	g/s	121	169	225	169	196	225	169	196	256	324
Injection pressure	Mpa	280	220	165	260	220	192	280	260	200	160
	bar	2800	2200	1650	2600	2200	1920	2800	2600	2000	1600
Holding pressure	Mpa	220	160	120	160	138	120	224	206	160	126
	bar	2200	1600	1200	1600	1380	1200	2240	2060	1600	1260

OTHERS				
Connection power	kW/A	120:15.1/27 120h:25/44.7	160:17.5/31 160h:28/50	210:20/37 210h:31/55
Hopper capacity	l	15	15	25
Machine dimension	m	4.06×1.29×1.91	4.10×1.29×1.91	4.33×1.29×1.91
Machine weight	t	4.2	4.3	4.4

We reserve the right to make changes as a result of further technical advantages.


Machine dimensions VE900 Ⅱ

unit: mm

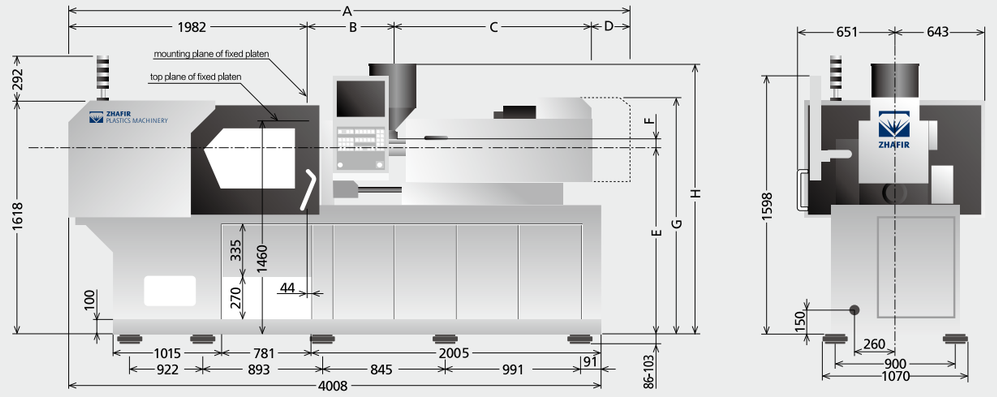

Platen dimensions VE900 Ⅱ

unit: mm

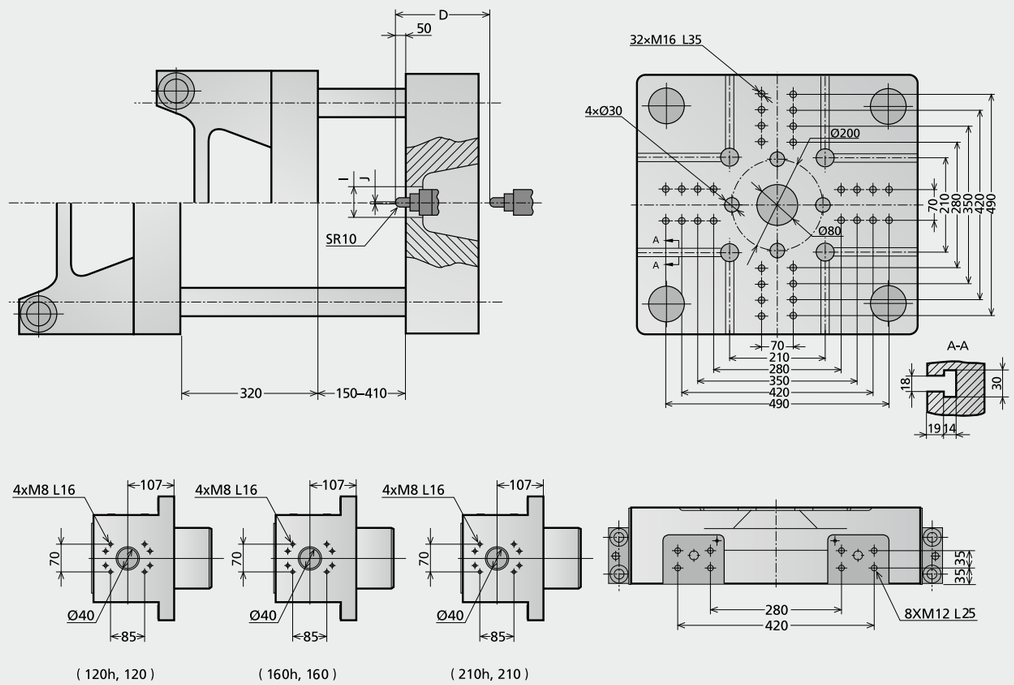

	A	B	C	D	E	F	G	H	I	J
210h, 210	4331	696	1328	325	1170	187	1656	1881	Ø125	Ø2.5
160h, 160	4104	616	1181	325	1170	187	1621	1856	Ø125	Ø2.5
120h, 120	4066	578	1181	325	1170	187	1621	1856	Ø125	Ø2.5

Technical data **VE1200 Ⅱ**

CLAMPING UNIT		VE1200 Ⅱ
Clamping force	kN	1200
Toggle stroke	mm	360
Min. mold height	mm	150
Max. mold height	mm	480
Max. mold opening stroke	mm	840
Space between tie bars H×V	mm	470×420
Min. mold dimension	mm	305×270
Ejector stroke	mm	100
Ejector force	kN (tf)	29.4 (3.0)
Mold platen dimension H×V	mm	690×640


		A	B	C	AA	A	B	C	AA	A	B	C	A	B	C
Screw diameter	mm	26	28	30	26	28	32	36	30	32	36	40	36	40	45
Screw L/D ratio	L/D	21	21	19.6	21	21	21	18.6	21	22.5	20	18	23.3	21	18.7
Injection volume (theoretical)	cm^3	58	67	78	61	70	100	127	102	116	147	182	173	213	270
Injection weight (PS)	g	52	61	70	55	64	91	116	92	106	134	166	157	194	246
Screw speed	rpm	400			400				400				400		
Plasticizing capacity (PS)	g/s	8.8	11	13	8.8	11	16	22	12.8	16	22	30	22	30	42
Nozzle contact force	kN (tf)	24.5 (2.5)			24.5 (2.5)				24.5 (2.5)				24.5 (2.5)		
Heating power	kW	6.8	7.8	7.8	5.4	7.5	8.0	8.0	7.7	9.9	9.9	9.9	12.6		
INJECTION UNIT		**160**			**210**				**300**				**430**		
Injection speed	mm/s	200			200				200				200		
Injection rate (PS)	g/s	96	112	128	96	112	146	185	128	146	184	228	184	228	289
Injection pressure	Mpa	260	220	192	280	260	200	160	280	253	200	162	247	200	158
	bar	2600	2200	1920	2800	2600	2000	1600	2800	2530	2000	1620	2470	2000	1580
Holding pressure	Mpa	160	138	120	224	206	160	126	224	202	160	130	197	160	126
	bar	1600	1380	1200	2240	2060	1600	1260	2240	2020	1600	1300	1970	1600	1260
INJECTION UNIT		**160h**			**210h**				**300h**				**430h**		
Injection speed	mm/s	350			350				300				300		
Injection rate (PS)	g/s	169	196	225	169	196	256	324	193	220	277	342	277	342	434
Injection pressure	Mpa	260	220	192	280	260	200	160	280	253	200	162	247	200	158
	bar	2600	2200	1920	2800	2600	2000	1600	2800	2530	2000	1620	2470	2000	1580
Holding pressure	Mpa	160	138	120	224	206	160	126	224	202	160	130	197	160	126
	bar	1600	1380	1200	2240	2060	1600	1260	2240	2020	1600	1300	1970	1600	1260

OTHERS					
Connection power	kW/A	160:17.5/31 160h:28/50	210:20/37 210h:31/55	300:25.7/46 300h:36.7/65	430:32.3/57 430h:43.3/77
Hopper capacity	l	15	25	25	25
Machine dimension	m	4.59×1.36×1.99	4.64×1.36×1.99	4.93×1.36×1.99	5.24×1.36×1.99
Machine weight	t	5.4	5.5	5.6	6

We reserve the right to make changes as a result of further technical advantages.


Machine dimensions VE1200 Ⅱ

unit: mm

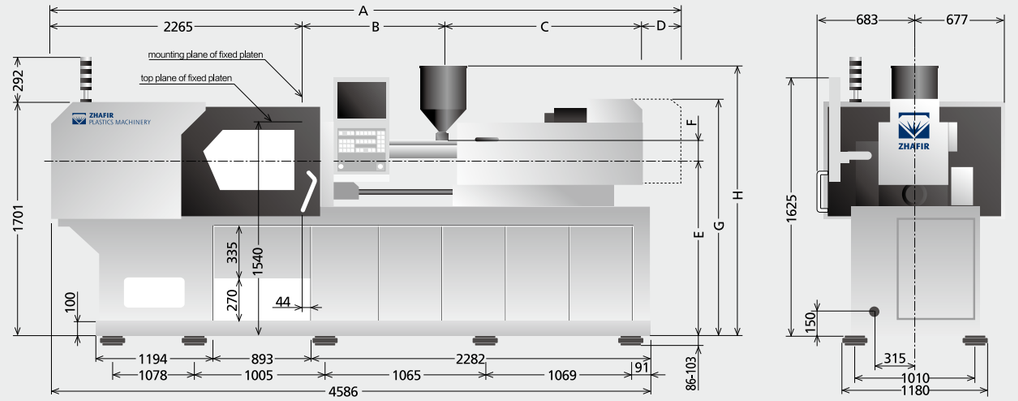

Platen dimensions VE1200 Ⅱ

unit: mm

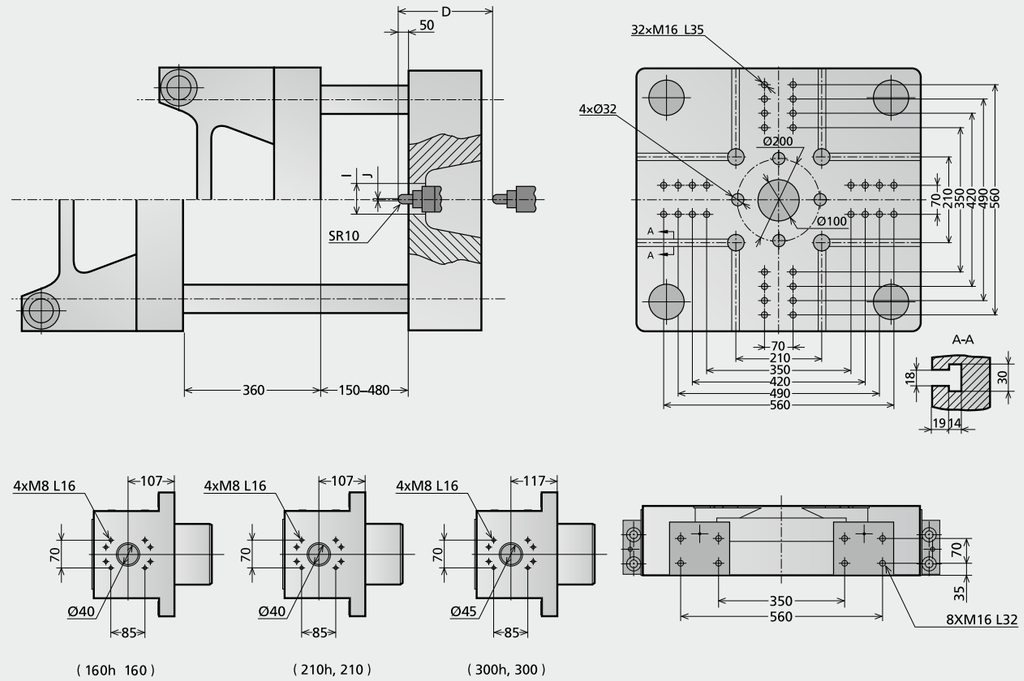

	A	B	C	D	E	F	G	H	I	J
300h, 300	4930	844	1466	355	1214	207	1744	1945	Ø125	Ø2.5
210h, 210	4644	696	1328	355	1214	187	1700	1925	Ø125	Ø2.5
160h, 160	4417	616	1181	355	1214	187	1700	1925	Ø125	Ø2.5

Technical data **VE1500 Ⅱ**

CLAMPING UNIT		VE1500 Ⅱ
Clamping force	kN	1500
Toggle stroke	mm	420
Min. mold height	mm	180
Max. mold height	mm	520
Max. mold opening stroke	mm	940
Space between tie bars H×V	mm	520×470
Min. mold dimension	mm	335×305
Ejector stroke	mm	120
Ejector force	kN (tf)	34.3 (3.5)
Mold platen dimension H×V	mm	770×730


		AA	A	B	C	AA	A	B	C	A	B	C	A	B	C
Screw diameter	mm	26	28	32	36	30	32	36	40	36	40	45	40	45	50
Screw L/D ratio	L/D	21	21	21	18.6	21	22.5	20	18	23.3	21	18.7	22.5	20	18
Injection volume (theoretical)	cm^3	61	70	100	127	102	116	147	182	173	213	270	252	319	395
Injection weight (PS)	g	55	64	91	116	92	106	134	166	157	194	246	229	290	358
Screw speed	rpm	400				400				400			350		
Plasticizing capacity (PS)	g/s	8.8	11	16	22	12.8	16	22	30	22	30	42	27	39	50
Nozzle contact force	kN (tf)	19.6 (2.0)				29.4 (3.0)				29.4 (3.0)			29.4 (3.0)		
Heating power	kW	5.4	7.5	8.0	8.0	7.7	9.9	9.9	9.9	12.6			14.2		
INJECTION UNIT		**210**				**300**				**430**			**640**		
Injection speed	mm/s	200				200				200			160		
Injection rate (PS)	g/s	96	112	146	185	128	146	184	228	184	228	289	183	231	285
Injection pressure	Mpa	280	260	200	160	280	253	200	162	247	200	158	253	200	162
	bar	2800	2600	2000	1600	2800	2530	2000	1620	2470	2000	1580	2530	2000	1620
Holding pressure	Mpa	224	206	160	126	224	202	160	130	197	160	126	202	160	130
	bar	2240	2060	1600	1260	2240	2020	1600	1300	1970	1600	1260	2020	1600	1300
INJECTION UNIT		**210h**				**300h**				**430h**			**640h**		
Injection speed	mm/s	350				300				300			250		
Injection rate (PS)	g/s	169	196	256	324	193	220	277	342	277	342	434	285	360	445
Injection pressure	Mpa	280	260	200	160	280	253	200	162	247	200	158	253	200	162
	bar	2800	2600	2000	1600	2800	2530	2000	1620	2470	2000	1580	2530	2000	1620
Holding pressure	Mpa	224	206	160	126	224	202	160	130	197	160	126	202	160	130
	bar	2240	2060	1600	1260	2240	2020	1600	1300	1970	1600	1260	2020	1600	1300

OTHERS					
Connection power	kW/A	210:20/37 210h:31/55	300:25.7/46 300h:36.7/65	430:32.3/57 430h:43.3/77	640:39/69 640h:57/101
Hopper capacity	l	25	25	25	25
Machine dimension	m	4.90×1.46×2.08	5.16×1.46×2.08	5.47×1.46×2.08	5.67×1.46×2.08
Machine weight	t	7	7.1	7.3	7.7

We reserve the right to make changes as a result of further technical advantages.

Machine dimensions VE1500 Ⅱ


unit: mm

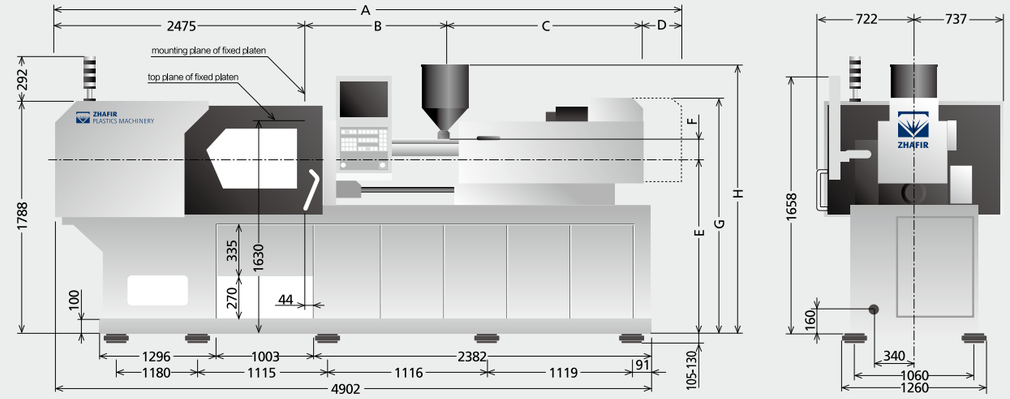

Note:The above machine size does not apply to the 640h and 640 injection unit.

Platen dimensions VE1500 Ⅱ

unit: mm

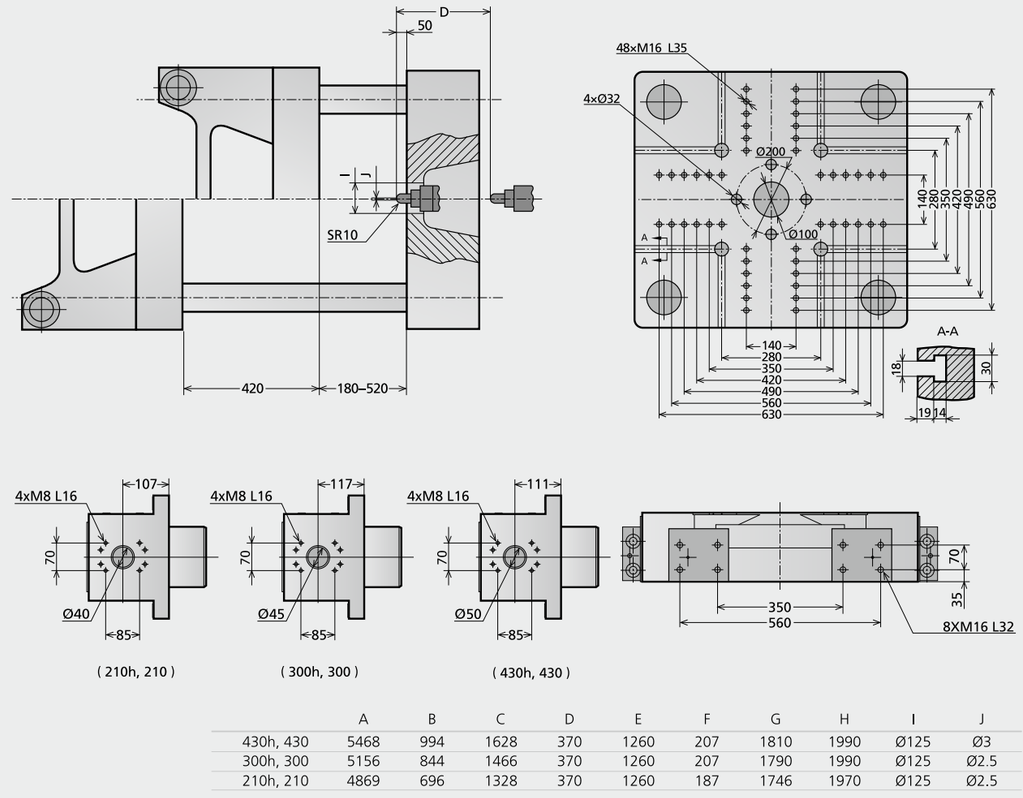

	A	B	C	D	E	F	G	H	I	J
430h, 430	5468	994	1628	370	1260	207	1810	1990	Ø125	Ø3
300h, 300	5156	844	1466	370	1260	207	1790	1990	Ø125	Ø2.5
210h, 210	4869	696	1328	370	1260	187	1746	1970	Ø125	Ø2.5

Technical data **VE1900 Ⅱ**

CLAMPING UNIT		VE1900 Ⅱ
Clamping force	kN	1900
Toggle stroke	mm	470
Min. mold height	mm	200
Max. mold height	mm	550
Max. mold opening stroke	mm	1020
Space between tie bars H×V	mm	570×520
Min. mold dimension	mm	370×335
Ejector stroke	mm	130
Ejector force	kN (tf)	44.1 (4.5)
Mold platen dimension H×V	mm	840×790


		AA	A	B	C	A	B	C	A	B	C	A	B	C
Screw diameter	mm	30	32	36	40	36	40	45	40	45	50	45	50	55
Screw L/D ratio	L/D	21	22.5	20	18	23.3	21	18.7	22.5	20	18	22.2	20	18
Injection volume (theoretical)	cm^3	102	116	147	182	173	213	270	252	319	395	334	412	499
Injection weight (PS)	g	92	106	134	166	157	194	246	229	290	358	304	375	454
Screw speed	rpm	400				400			350			320		
Plasticizing capacity (PS)	g/s	12.8	16	22	30	22	30	42	27	39	50	35	46	60
Nozzle contact force	kN (tf)	24.5 (2.5)				39.2 (4.0)			39.2 (4.0)			39.2 (4.0)		
Heating power	kW	7.7	9.9	9.9	9.9	12.6			14.2			19		
INJECTION UNIT		**300**				**430**			**640**			**830**		
Injection speed	mm/s	200				200			160			160		
Injection rate (PS)	g/s	128	146	184	228	184	228	289	183	231	285	231	285	346
Injection pressure	Mpa	280	253	200	162	247	200	158	253	200	162	247	200	165
	bar	2800	2530	2000	1620	2470	2000	1580	2530	2000	1620	2470	2000	1650
Holding pressure	Mpa	224	202	160	130	197	160	126	202	160	130	197	160	132
	bar	2240	2020	1600	1300	1970	1600	1260	2020	1600	1300	1970	1600	1320
INJECTION UNIT		**300h**				**430h**			**640h**			**830h**		
Injection speed	mm/s	300				300			250			250		
Injection rate (PS)	g/s	193	220	277	342	277	342	434	285	360	445	362	446	594
Injection pressure	Mpa	280	253	200	162	247	200	158	253	200	162	247	200	165
	bar	2800	2530	2000	1620	2470	2000	1580	2530	2000	1620	2470	2000	1650
Holding pressure	Mpa	224	202	160	130	197	160	126	202	160	130	197	160	132
	bar	2240	2020	1600	1300	1970	1600	1260	2020	1600	1300	1970	1600	1320

OTHERS					
Connection power	kW/A	300:25.7/46 300h:36.7/65	430:32.3/57 430h:43.3/77	640:39/69 640h:57/101	830:47.5/85 830h:65/116
Hopper capacity	l	25	25	25	50
Machine dimension	m	5.46×1.57×2.18	5.77×1.57×2.18	5.98×1.57×2.18	6.19×1.57×2.18
Machine weight	t	8.5	8.8	8.9	9.7

We reserve the right to make changes as a result of further technical advantages.

Machine dimensions VE1900 Ⅱ


unit: mm

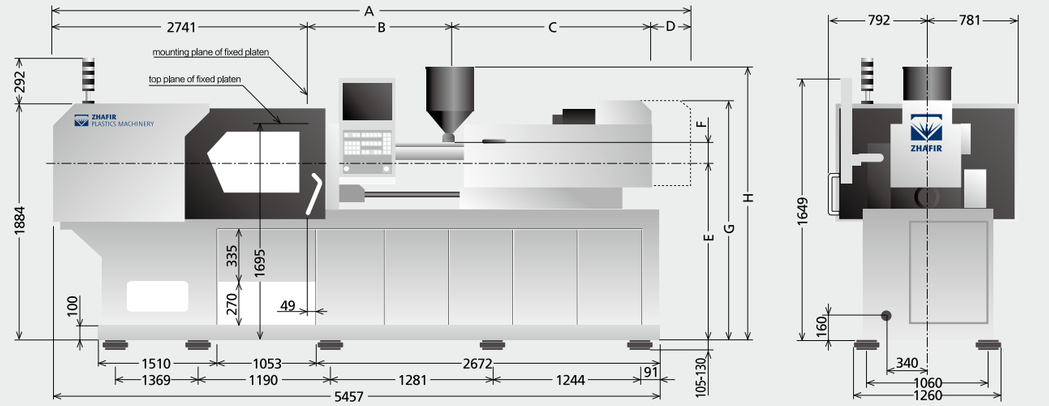

Note:The above machine size does not apply to the 830h and 830 injection unit.

Platen dimensions VE1900 Ⅱ

unit: mm

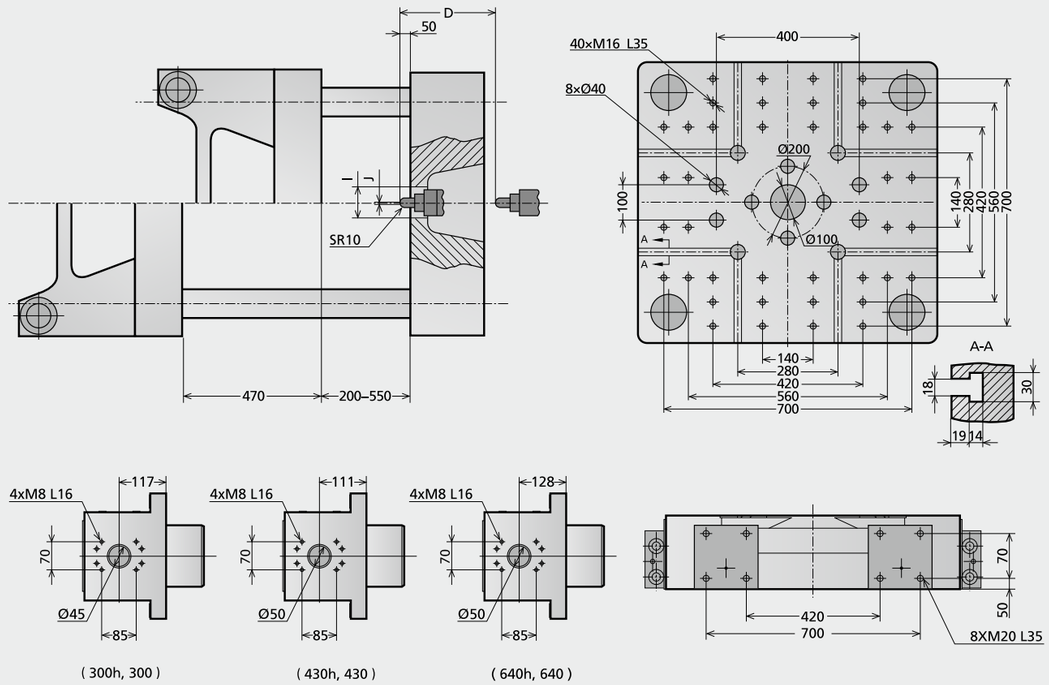

	A	B	C	D	E	F	G	H	I	J
640h, 640	5976	1052	1773	410	1295	209	1852	2028	Ø160	Ø3
430h, 430	5773	994	1628	410	1295	207	1845	2025	Ø160	Ø3
300h, 300	5461	844	1466	410	1295	207	1825	2025	Ø160	Ø2.5

Technical data **VE2300 Ⅱ**

CLAMPING UNIT		VE2300 Ⅱ
Clamping force	kN	2300
Toggle stroke	mm	550
Min. mold height	mm	220
Max. mold height	mm	600
Max. mold opening stroke	mm	1150
Space between tie bars H×V	mm	620×620
Min. mold dimension	mm	400×400
Ejector stroke	mm	150
Ejector force	kN (tf)	49 (5.0)
Mold platen dimension H×V	mm	920×920


		A	B	C	A	B	C	A	B	C	A	B	C
Screw diameter	mm	36	40	45	40	45	50	45	50	55	50	55	60
Screw L/D ratio	L/D	23.3	21	18.7	22.5	20	18	22.2	20	18	22	20	18.3
Injection volume (theoretical)	cm^3	173	213	270	252	319	395	334	412	499	471	570	678
Injection weight (PS)	g	157	194	246	229	290	358	304	375	454	428	518	617
Screw speed	rpm	400			350			320			320		
Plasticizing capacity (PS)	g/s	22	30	42	27	39	50	35	46	60	46	60	71
Nozzle contact force	kN (tf)	29.4 (3.0)			49 (5.0)			49 (5.0)			54 (5.5)		
Heating power	kW	12.6			14.2			19			23.4		
INJECTION UNIT		**430**			**640**			**830**			**1100**		
Injection speed	mm/s	200			160			160			160		
Injection rate (PS)	g/s	184	228	289	183	231	285	231	285	346	285	346	411
Injection pressure	Mpa	247	200	158	253	200	162	247	200	165	218	180	151
	bar	2470	2000	1580	2530	2000	1620	2470	2000	1650	2180	1800	1510
Holding pressure	Mpa	197	160	126	202	160	130	197	160	132	194	160	134
	bar	1970	1600	1260	2020	1600	1300	1970	1600	1320	1940	1600	1340
INJECTION UNIT		**430h**			**640h**			**830h**			**1100h**		
Injection speed	mm/s	300			250			250			250		
Injection rate (PS)	g/s	277	342	434	285	360	445	362	446	594	446	540	642
Injection pressure	Mpa	247	200	158	253	200	162	247	200	165	218	180	151
	bar	2470	2000	1580	2530	2000	1620	2470	2000	1650	2180	1800	1510
Holding pressure	Mpa	197	160	126	202	160	130	197	160	132	194	160	134
	bar	1970	1600	1260	2020	1600	1300	1970	1600	1320	1940	1600	1340

OTHERS					
Connection power	kW/A	430:32.3/57 430h:43.3/77	640:39/69 640h:57/101	830:47.5/85 830h:65/116	1100:51/92 1100h:73.2/130
Hopper capacity	l	25	25	50	50
Machine dimension	m	6.18×1.73×2.3	6.22×1.73×2.3	6.44×1.73×2.3	6.76×1.73×2.3
Machine weight	t	11.3	11.5	11.8	12.5

We reserve the right to make changes as a result of further technical advantages.

Machine dimensions VE2300 Ⅱ


unit: mm

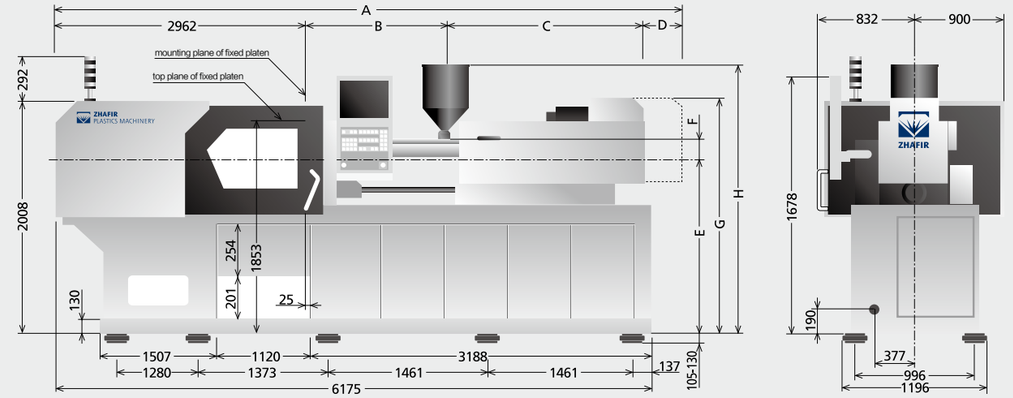

Note:The above machine size does not apply to the 1100h and 1100 injection unit.

Platen dimensions VE2300 Ⅱ

unit: mm

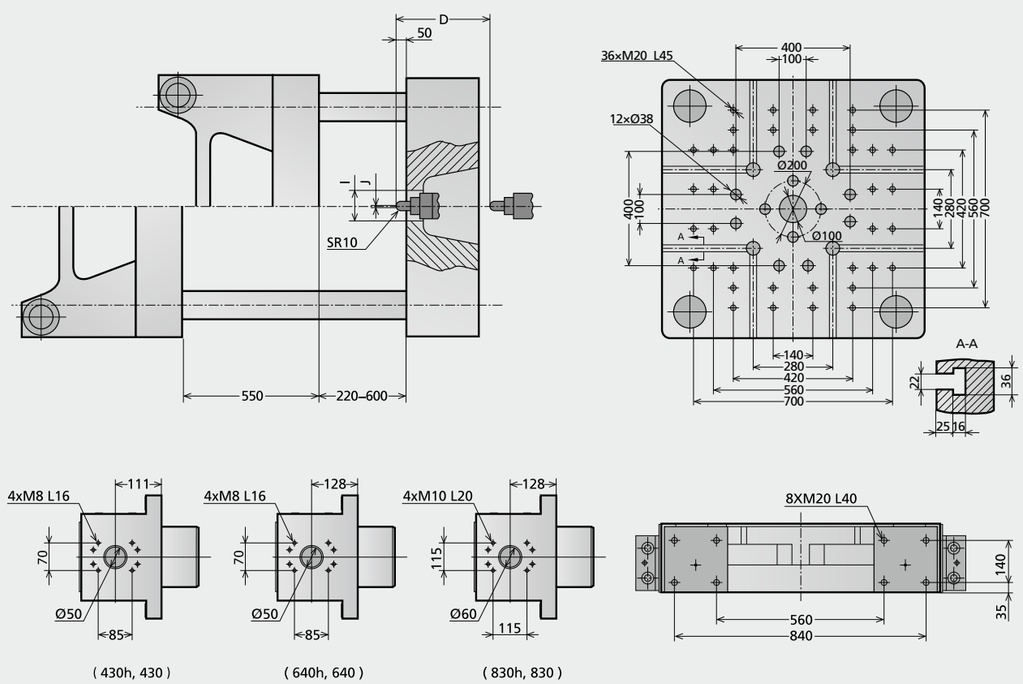

(430h, 430) (640h, 640) (830h, 830)

	A	B	C	D	E	F	G	H	I	J
830h, 830	6439	1166	1876	435	1385	233	1998	2219	Ø160	Ø3
640h, 640	6222	1052	1773	435	1385	209	1942	2118	Ø160	Ø3
430h, 430	6019	994	1628	435	1385	207	1935	2115	Ø160	Ø3

Technical data **VE3000 Ⅱ**

CLAMPING UNIT		VE3000 Ⅱ
Clamping force	kN	3000
Toggle stroke	mm	600
Min. mold height	mm	240
Max. mold height	mm	650
Max. mold opening stroke	mm	1250
Space between tie bars H×V	mm	720×720
Min. mold dimension	mm	470×470
Ejector stroke	mm	150
Ejector force	kN (tf)	58.8 (6.0)
Mold platen dimension H×V	mm	1040×1040


		A	B	C	A	B	C	A	B	C	A	B	C
Screw diameter	mm	45	50	55	50	55	60	55	60	65	60	65	70
Screw L/D ratio	L/D	22.2	20	18	22	20	18.3	21.8	20	18.5	21.6	20	18.6
Injection volume (theoretical)	cm^3	334	412	499	471	570	678	617	735	863	792	929	1078
Injection weight (PS)	g	304	375	454	428	518	617	562	668	785	720	845	980
Screw speed	rpm	320			320			300			250		
Plasticizing capacity (PS)	g/s	35	46	60	46	60	71	56	70	81	60	70	85
Nozzle contact force	kN (tf)	54 (5.5)			54 (5.5)			54 (5.5)			54 (5.5)		
Heating power	kW	19			23.4			27.8			32		
INJECTION UNIT		**830**			**1100**			**1400**			**1700**		
Injection speed	mm/s	160			160			160			160		
Injection rate (PS)	g/s	231	285	346	285	346	411	346	411	483	411	483	560
Injection pressure	Mpa	247	200	165	218	180	151	214	180	153	210	180	155
	bar	2470	2000	1650	2180	1800	1510	2140	1800	1530	2100	1800	1550
Holding pressure	Mpa	197	160	132	194	160	134	190	160	136	187	160	138
	bar	1970	1600	1320	1940	1600	1340	1900	1600	1360	1870	1600	1380
INJECTION UNIT		**830h**			**1100h**			**1400h**			**1700h**		
Injection speed	mm/s	250			250			250			250		
Injection rate (PS)	g/s	362	446	594	446	540	642	540	642	754	642	754	875
Injection pressure	Mpa	247	200	165	218	180	151	214	180	153	210	180	155
	bar	2470	2000	1650	2180	1800	1510	2140	1800	1530	2100	1800	1550
Holding pressure	Mpa	197	160	132	194	160	134	190	160	136	187	160	138
	bar	1970	1600	1320	1940	1600	1340	1900	1600	1360	1870	1600	1380

OTHERS					
Connection power	kW/A	830:47.5/85 830h:65/116	1100:51/92 1100h:73.2/130	1400:56/101 1400h:76.8/138	1700:72/129 1700h:95/168
Hopper capacity	l	50	50	50	50
Machine dimension	m	6.94×1.99×2.37	7.04×1.99×2.37	7.33×1.99×2.37	7.59×1.99×2.37
Machine weight	t	14.8	15.4	16.2	16.3

We reserve the right to make changes as a result of further technical advantages.

Machine dimensions VE3000 Ⅱ


unit: mm

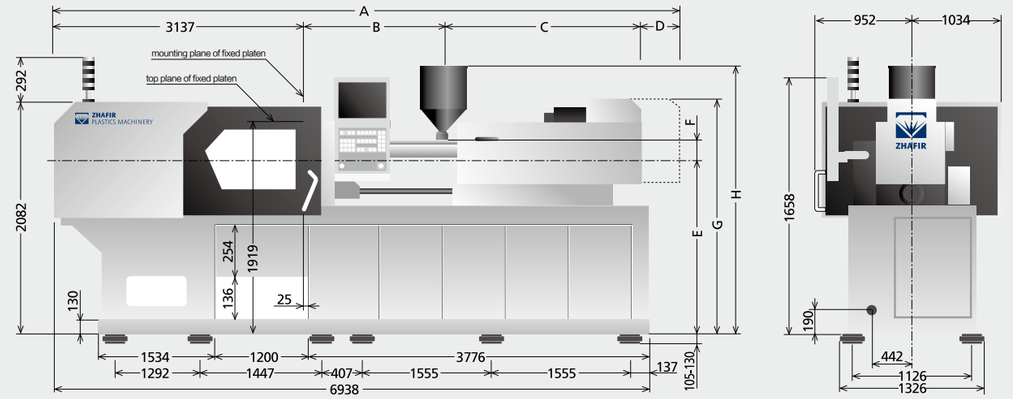

Note:The above machine size does not apply to the 1700h and 1700 injection unit.

Platen dimensions VE3000 Ⅱ

unit: mm

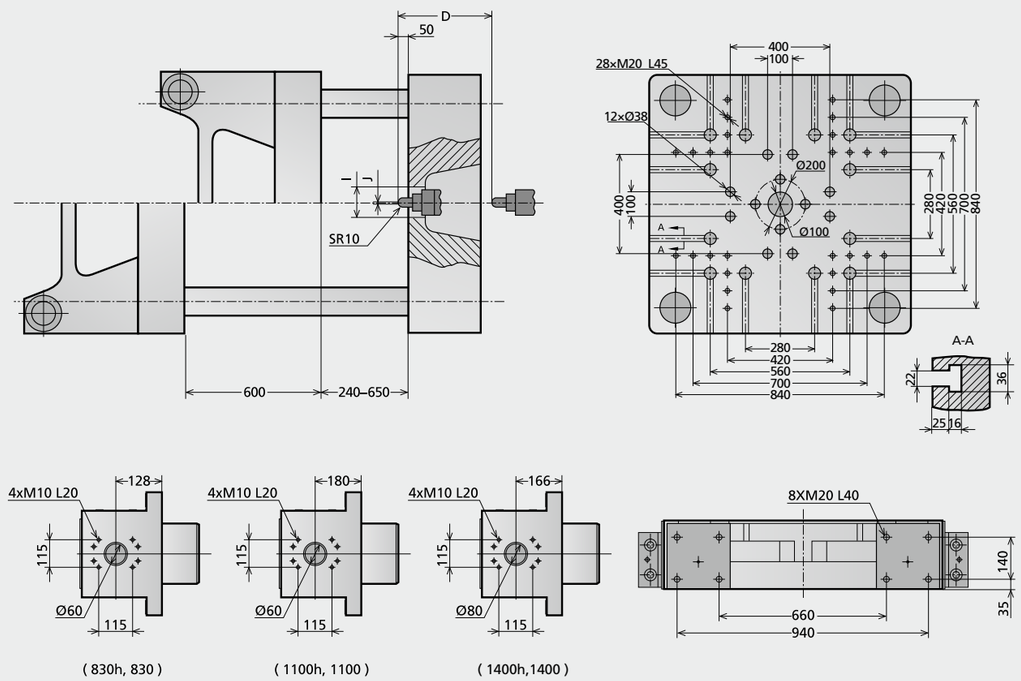

	A	B	C	D	E	F	G	H	I	J
1400h,1400	7325	1366	2282	540	1388	248	2093	2237	Ø160	Ø3
1100h,1100	7043	1281	2085	540	1388	243	2104	2232	Ø160	Ø3
830h, 830	6649	1166	1876	470	1388	233	2001	2222	Ø160	Ø3

Technical data **VE3600 Ⅱ**

CLAMPING UNIT		VE3600 Ⅱ
Clamping force	kN	3600
Toggle stroke	mm	700
Min. mold height	mm	250
Max. mold height	mm	710
Max. mold opening stroke	mm	1410
Space between tie bars H×V	mm	820×820
Min. mold dimension	mm	540×540
Ejector stroke	mm	160
Ejector force	kN (tf)	58.8 (6.0)
Mold platen dimension H×V	mm	1150×1150


		A	B	C	A	B	C	A	B	C	A	B	C
Screw diameter	mm	50	55	60	55	60	65	60	65	70	65	70	80
Screw L/D ratio	L/D	22	20	18.3	21.8	20	18.5	21.6	20	18.6	21.5	20	17.5
Injection volume (theoretical)	cm^3	471	570	678	617	735	863	792	929	1078	1068	1239	1619
Injection weight (PS)	g	428	518	617	562	668	785	720	845	980	972	1127	1473
Screw speed	rpm	320			300			250			210		
Plasticizing capacity (PS)	g/s	46	60	71	56	70	81	60	70	85	60	80	105
Nozzle contact force	kN (tf)	54 (5.5)			54 (5.5)			54 (5.5)			63.7 (6.5)		
Heating power	kW	23.4			27.8			32			38		
INJECTION UNIT		**1100**			**1400**			**1700**			**2250**		
Injection speed	mm/s	160			160			160			160		
Injection rate (PS)	g/s	285	346	411	346	411	483	411	483	560	483	560	731
Injection pressure	Mpa	218	180	151	214	180	153	210	180	155	210	180	138
	bar	2180	1800	1510	2140	1800	1530	2100	1800	1550	2100	1800	1380
Holding pressure	Mpa	194	160	134	190	160	136	187	160	138	190	162	124
	bar	1940	1600	1340	1900	1600	1360	1870	1600	1380	1900	1620	1240
INJECTION UNIT		**1100h**			**1400h**			**1700h**			**--**		
Injection speed	mm/s	250			250			250			--		
Injection rate (PS)	g/s	446	540	642	540	642	754	642	754	875	--	--	--
Injection pressure	Mpa	218	180	151	214	180	153	210	180	155	--	--	--
	bar	2180	1800	1510	2140	1800	1530	2100	1800	1550	--	--	--
Holding pressure	Mpa	194	160	134	190	160	136	187	160	138	--	--	--
	bar	1940	1600	1340	1900	1600	1360	1870	1600	1380	--	--	--

OTHERS					
Connection power	kW/A	1100:51/92 1100h:73.2/130	1400:56/101 1400h:76.8/138	1700:72/129 1700h:95/168	2250:82/147 --
Hopper capacity	l	50	50	50	50
Machine dimension	m	7.36×2.1×2.44	7.70×2.1×2.44	7.86×2.1×2.44	8.32×2.1×2.44
Machine weight	t	18.2	19	19.1	21

We reserve the right to make changes as a result of further technical advantages.

Machine dimensions VE3600 Ⅱ


unit: mm

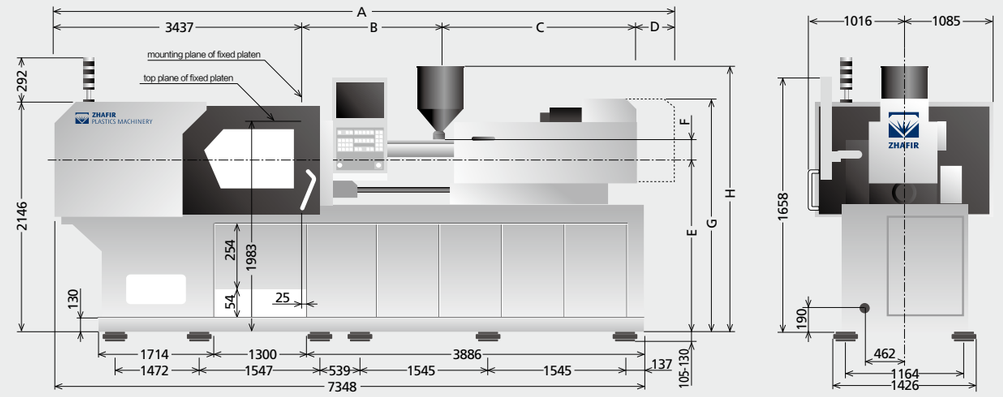

Note:The above machine size does not apply to the 2250 injection unit.

Platen dimensions VE3600 Ⅱ

unit: mm

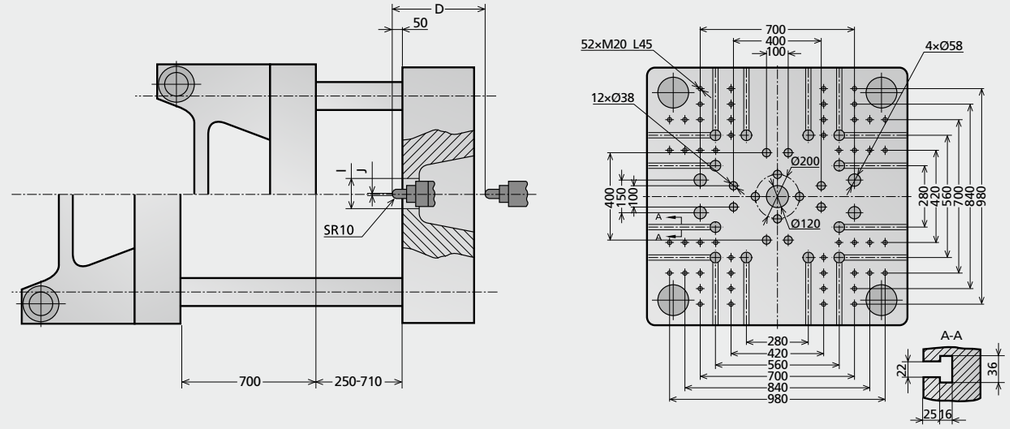

(1100h, 1100) (1400h,1400) (1700h,1700)

	A	B	C	D	E	F	G	H	I	J
1700h,1700	7868	1528	2333	570	1388	248	2063	2237	Ø200	Ø3
1400h,1400	7655	1366	2282	570	1388	248	2093	2237	Ø200	Ø3
1100h, 1100	7363	1271	2085	570	1388	243	2104	2232	Ø200	Ø3

Technical data **VE4500 Ⅱ**

CLAMPING UNIT		VE4500 Ⅱ
Clamping force	kN	4500
Toggle stroke	mm	800
Min. mold height	mm	350
Max. mold height	mm	800
Max. mold opening stroke	mm	1600
Space between tie bars H×V	mm	870×870
Min. mold dimension	mm	570×570
Ejector stroke	mm	180
Ejector force	kN (tf)	98 (10.0)
Mold platen dimension H×V	mm	1270×1270


		A	B	C	A	B	C	A	B	C	A	B	C
Screw diameter	mm	55	60	65	60	65	70	65	70	80	75	80	90
Screw L/D ratio	L/D	21.8	20	18.5	21.6	20	18.6	21.5	20	17.5	21.3	20	17.8
Injection volume (theoretical)	cm^3	617	735	863	792	929	1078	1068	1239	1619	1634	1860	2354
Injection weight (PS)	g	562	668	785	720	845	980	972	1127	1473	1487	1693	2142
Screw speed	rpm	300			250			210			185		
Plasticizing capacity (PS)	g/s	56	70	81	60	70	85	60	80	105	80	90	110
Nozzle contact force	kN (tf)	54 (5.5)			54 (5.5)			63.7 (6.5)			63.7 (6.5)		
Heating power	kW	27.8			32			38			42		
INJECTION UNIT		**1400**			**1700**			**2250**			**3350**		
Injection speed	mm/s	160			160			160			160		
Injection rate (PS)	g/s	346	411	483	411	483	560	483	560	731	643	731	926
Injection pressure	Mpa	214	180	153	210	180	155	210	180	138	205	180	142
	bar	2140	1800	1530	2100	1800	1550	2100	1800	1380	2050	1800	1420
Holding pressure	Mpa	190	160	136	187	160	138	190	162	124	185	162	128
	bar	1900	1600	1360	1870	1600	1380	1900	1620	1240	1850	1620	1280
INJECTION UNIT		**1400h**			**1700h**			**--**			**--**		
Injection speed	mm/s	250			250			--			--		
Injection rate (PS)	g/s	540	642	754	642	754	875	--	--	--	--	--	--
Injection pressure	Mpa	214	180	153	210	180	155	--	--	--	--	--	--
	bar	2140	1800	1530	2100	1800	1550	--	--	--	--	--	--
Holding pressure	Mpa	190	160	136	187	160	138	--	--	--	--	--	--
	bar	1900	1600	1360	1870	1600	1380	--	--	--	--	--	--

OTHERS					
Connection power	kW/A	1400:56/101 1400h:76.8/138	1700:72/129 1700h:95/168	2250:82/147 --	3350:111/198 --
Hopper capacity	l	50	50	50	100
Machine dimension	m	8.72×2.25×2.38	8.72×2.25×2.38	8.9×2.25×2.38	9.46×2.25×2.4
Machine weight	t	25.8	25.9	26.4	28.1

We reserve the right to make changes as a result of further technical advantages.


Machine dimensions VE4500 Ⅱ

unit: mm

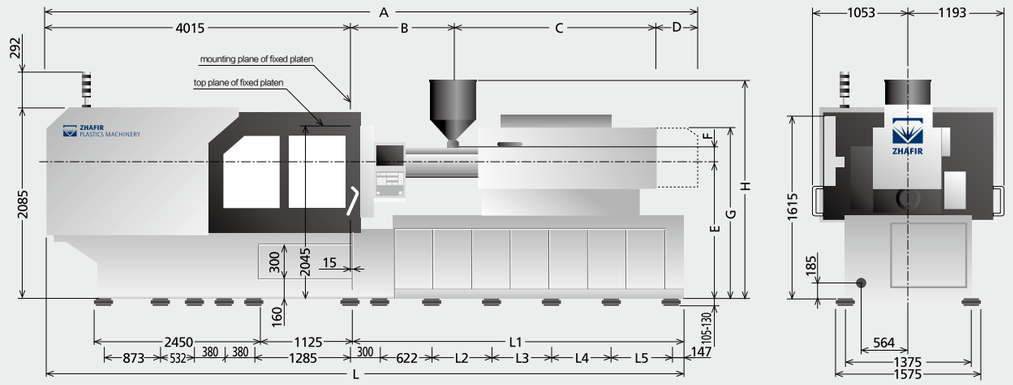

Platen dimensions VE4500 Ⅱ

unit: mm

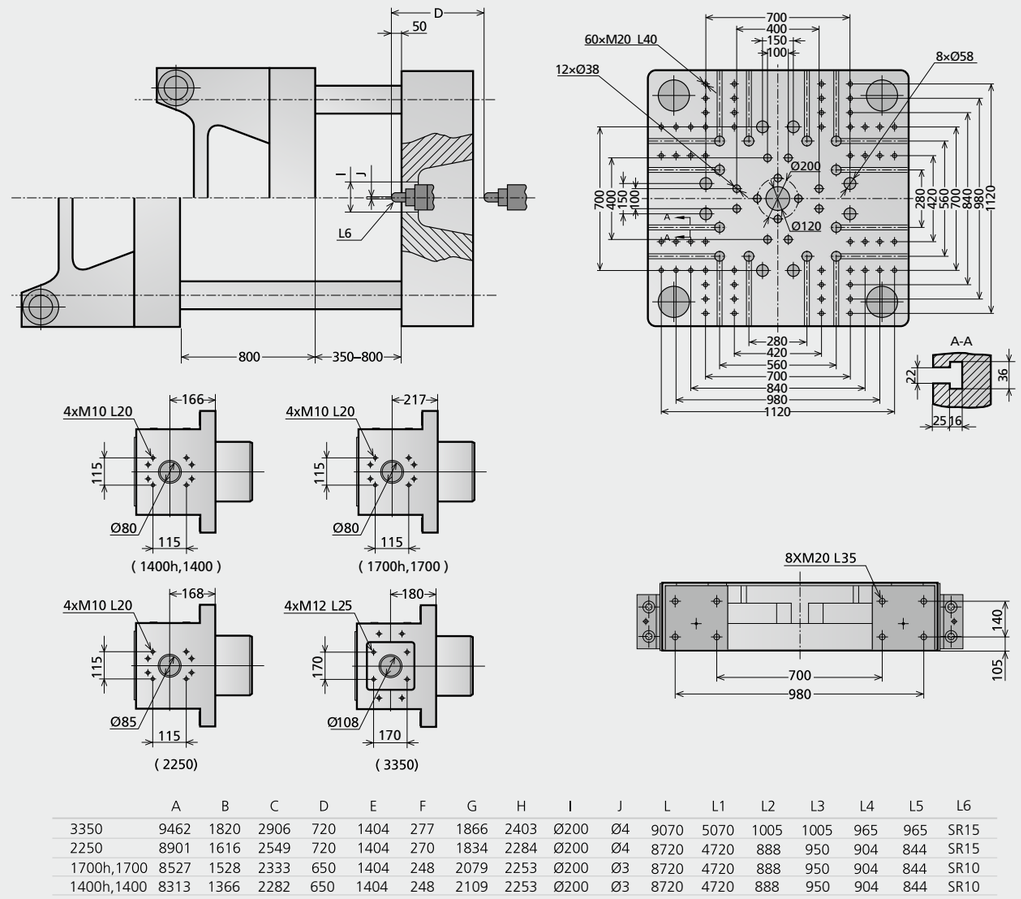

	A	B	C	D	E	F	G	H	I	J	L	L1	L2	L3	L4	L5	L6
3350	9462	1820	2906	720	1404	277	1866	2403	Ø200	Ø4	9070	5070	1005	1005	965	965	SR15
2250	8901	1616	2549	720	1404	270	1834	2284	Ø200	Ø4	8720	4720	888	950	904	844	SR15
1700h,1700	8527	1528	2333	650	1404	248	2079	2253	Ø200	Ø3	8720	4720	888	950	904	844	SR10
1400h,1400	8313	1366	2282	650	1404	248	2109	2253	Ø200	Ø3	8720	4720	888	950	904	844	SR10

Technical data **VE5500 Ⅱ**

CLAMPING UNIT		VE5500 Ⅱ
Clamping force	kN	5500
Toggle stroke	mm	900
Min. mold height	mm	380
Max. mold height	mm	880
Max. mold opening stroke	mm	1780
Space between tie bars H×V	mm	970×970
Min. mold dimension	mm	630×630
Ejector stroke	mm	180
Ejector force	kN (tf)	137.2 (14.0)
Mold platen dimension H×V	mm	1400×1400


		A	B	C	A	B	C	A	B	C	A	B	C
Screw diameter	mm	55	60	65	60	65	70	65	70	80	75	80	90
Screw L/D ratio	L/D	21.8	20	18.5	21.6	20	18.6	21.5	20	17.5	21.3	20	17.8
Injection volume (theoretical)	cm^3	617	735	863	792	929	1078	1068	1239	1619	1634	1860	2354
Injection weight (PS)	g	562	668	785	720	845	980	972	1127	1473	1487	1693	2142
Screw speed	rpm	300			250			210			185		
Plasticizing capacity (PS)	g/s	56	70	81	60	70	85	60	80	105	80	90	110
Nozzle contact force	kN (tf)	54 (5.5)			54 (5.5)			63.7 (6.5)			63.7 (6.5)		
Heating power	kW	27.8			32			38			42		
INJECTION UNIT		**1400**			**1700**			**2250**			**3350**		
Injection speed	mm/s	160			160			160			160		
Injection rate (PS)	g/s	346	411	483	411	483	560	483	560	731	643	731	926
Injection pressure	Mpa	214	180	153	210	180	155	210	180	138	205	180	142
	bar	2140	1800	1530	2100	1800	1550	2100	1800	1380	2050	1800	1420
Holding pressure	Mpa	190	160	136	187	160	138	190	162	124	185	162	128
	bar	1900	1600	1360	1870	1600	1380	1900	1620	1240	1850	1620	1280
INJECTION UNIT		**1400h**			**1700h**			**--**			**--**		
Injection speed	mm/s	250			250			--			--		
Injection rate (PS)	g/s	540	642	754	642	754	875	--	--	--	--	--	--
Injection pressure	Mpa	214	180	153	210	180	155	--	--	--	--	--	--
	bar	2140	1800	1530	2100	1800	1550	--	--	--	--	--	--
Holding pressure	Mpa	190	160	136	187	160	138	--	--	--	--	--	--
	bar	1900	1600	1360	1870	1600	1380	--	--	--	--	--	--

OTHERS					
Connection power	kW/A	1400:56/101 1400h:76.8/138	1700:72/129 1700h:95/168	2250:82/147 --	3350:111/198 --
Hopper capacity	l	50	50	50	100
Machine dimension	m	9.05×2.44×2.5	9.05×2.44×2.5	9.29×2.44×2.5	9.85×2.44×2.5
Machine weight	t	31.3	31.4	31.9	33.6

We reserve the right to make changes as a result of further technical advantages.


Machine dimensions VE5500 Ⅱ

unit: mm

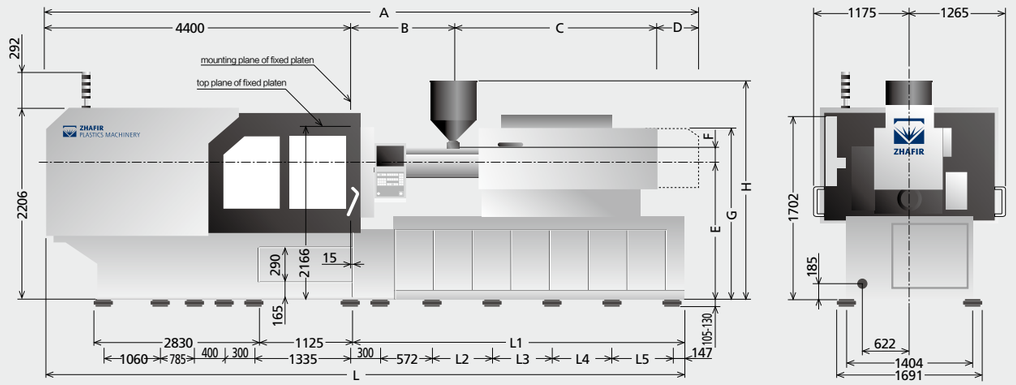

Platen dimensions VE5500 Ⅱ

unit: mm

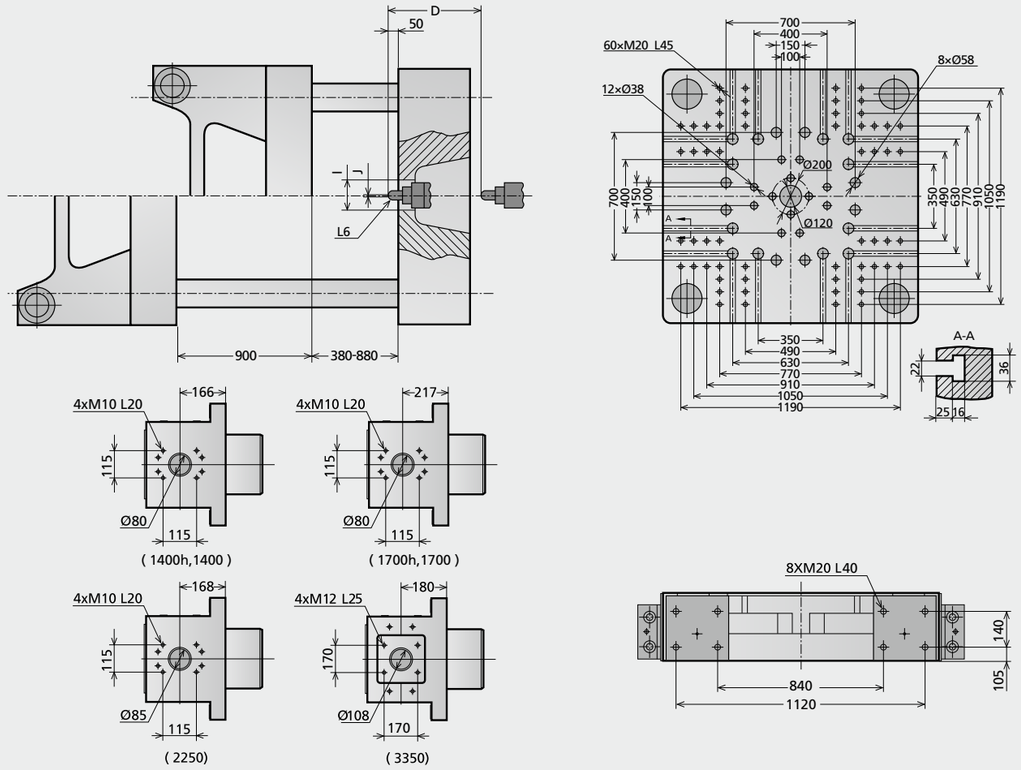

	A	B	C	D	E	F	G	H	I	J	L	L1	L2	L3	L4	L5	L6
3350	9846	1820	2906	720	1460	277	1922	2347	Ø250	Ø4	9455	5070	904	1069	1069	894	SR15
2250	9285	1616	2549	720	1460	270	1890	2340	Ø250	Ø4	9055	4670	888	950	904	844	SR15
1700h,1700	8911	1528	2333	650	1460	248	2135	2309	Ø250	Ø3	9055	4670	888	950	904	844	SR10
1400h,1400	8698	1366	2282	650	1460	248	2165	2309	Ø250	Ø3	9055	4670	888	950	904	844	SR10

Technical data **VE6500 II**

CLAMPING UNIT		VE6500 II
Clamping force	kN	6500
Toggle stroke	mm	1000
Min. mold height	mm	420
Max. mold height	mm	1000
Max. mold opening stroke	mm	2000
Space between tie bars H×V	mm	1080×1080
Min. mold dimension	mm	700×700
Ejector stroke	mm	200
Ejector force	kN (tf)	196(20.0)
Mold platen dimension H×V	mm	1550×1550


		A	B	C	A	B	C	A	B	C
Screw diameter	mm	60	65	70	65	70	80	75	80	90
Screw L/D ratio	L/D	21.6	20	18.6	21.5	20	17.5	21.3	20	17.8
Injection volume (theoretical)	cm^3	792	929	1078	1068	1239	1619	1634	1860	2354
Injection weight (PS)	g	720	845	980	972	1127	1473	1487	1693	2142
Screw speed	rpm		250			210			185	
Plasticizing capacity (PS)	g/s	60	70	85	60	80	105	80	90	110
Nozzle contact force	kN (tf)		54(5.5)			63.7(6.5)			63.7(6.5)	
Heating power	kW		32			38			42	
INJECTION UNIT			**1700**			**2250**			**3350**	
Injection speed	mm/s		160			160			160	
Injection rate (PS)	g/s	411	483	560	483	560	731	643	731	926
Injection pressure	Mpa	210	180	155	210	180	138	205	180	142
	bar	2100	1800	1550	2100	1800	1380	2050	1800	1420
Holding pressure	Mpa	187	160	138	190	162	124	185	162	128
	bar	1870	1600	1380	1900	1620	1240	1850	1620	1280
INJECTION UNIT			**1700h**			**--**			**--**	
Injection speed	mm/s		250			--			--	
Injection rate (PS)	g/s	642	754	875	--	--	--	--	--	--
Injection pressure	Mpa	210	180	155	--	--	--	--	--	--
	bar	2100	1800	1550	--	--	--	--	--	--
Holding pressure	Mpa	187	160	138	--	--	--	--	--	--
	bar	1870	1600	1380	--	--	--	--	--	--

OTHERS				
Connection power	kW/A	1700:72/129 1700h:95/168	2250:82/147 --	3350:111/198 --
Hopper capacity	l	9.3×2.58×2.88	9.7×2.58×2.64	10.3×2.58×2.76
Machine dimension	m	38	40	42.3
Machine weight	t			

We reserve the right to make changes as a result of further technical advantages.


Machine dimensions VE6500 II


unit: mm

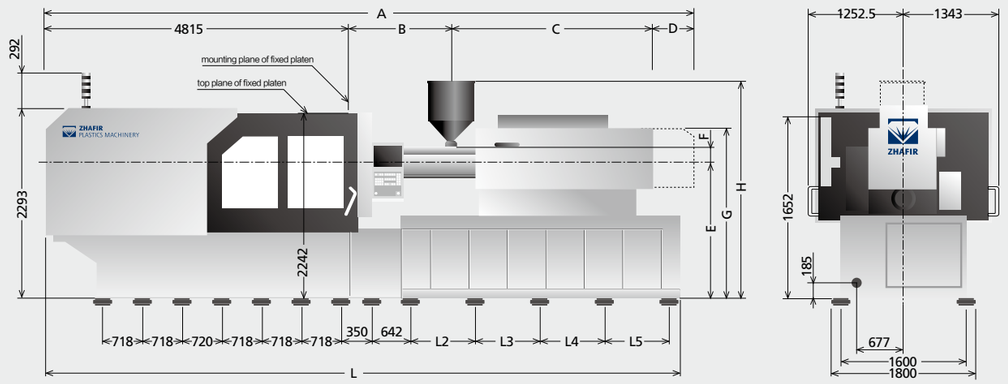

Platen dimensions VE6500 II

unit: mm

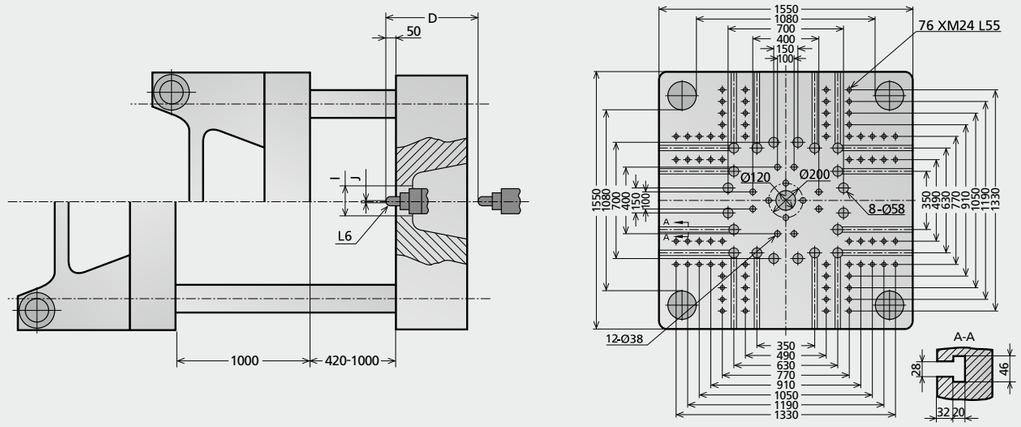

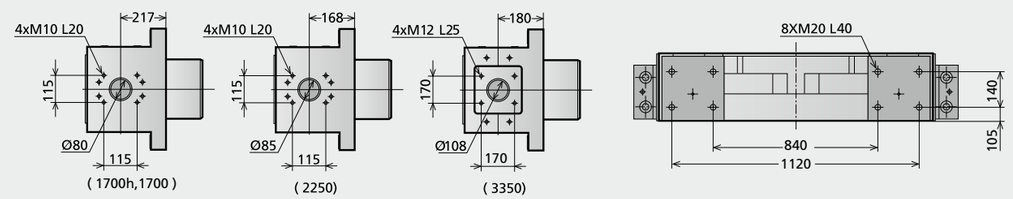


	A	B	C	D	E	F	G	H	I	J	L	L1	L2	L3	L4	L5	L6
3350	10261	1820	2906	720	1457	308	1927	2758	Ø250	Ø4	10015	/	908	1000	1010	1018	SR15
2250	9700	1616	2549	720	1457	301	1895	2639	Ø250	Ø4	10015	/	908	1000	1010	1018	SR15
1700h, 1700	9276	1528	2333	650	1457	279	2140	2884	Ø250	Ø3	10015	/	908	1000	1010	1018	SR10

Platen Layout **VE400 II**


European version

unit: mm

Fixed platen

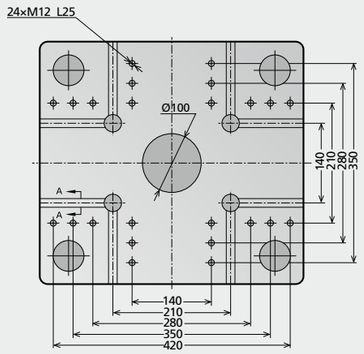


Movable platen

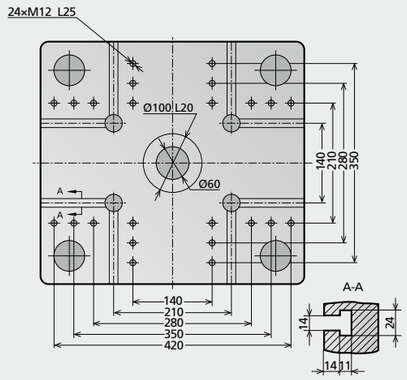


American version

unit: mm

Fixed platen

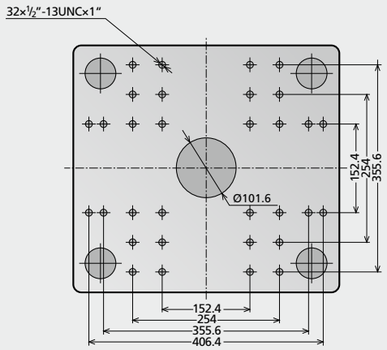


Movable platen

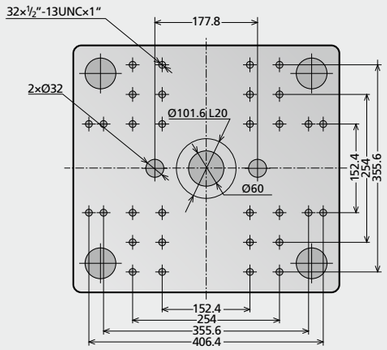


Japanese version

unit: mm

Fixed platen

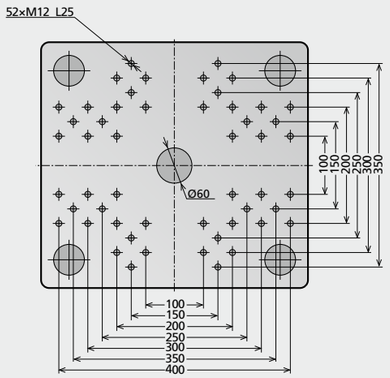

Movable platen

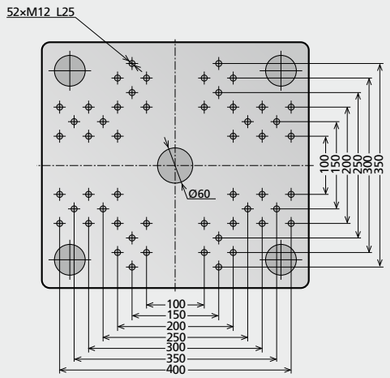


Platen Layout **VE600 II**


European version

unit: mm

Fixed platen

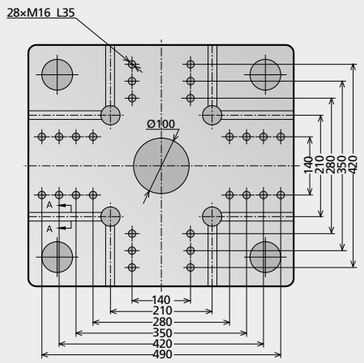


Movable platen

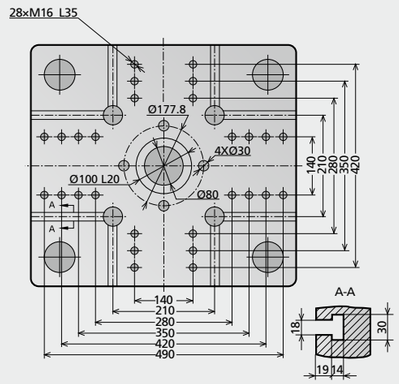


American version

unit: mm

Fixed platen

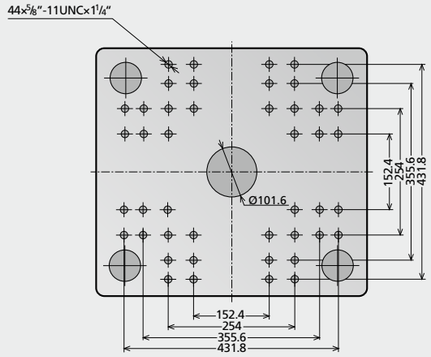


Movable platen

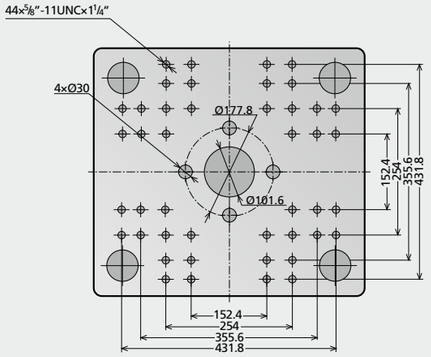


Japanese version

unit: mm

Fixed platen

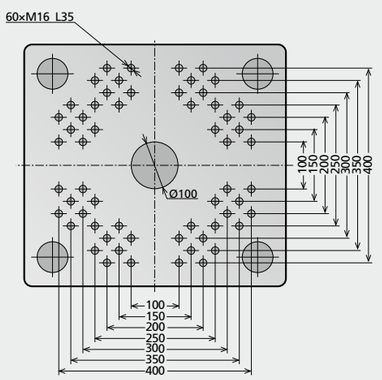

Movable platen

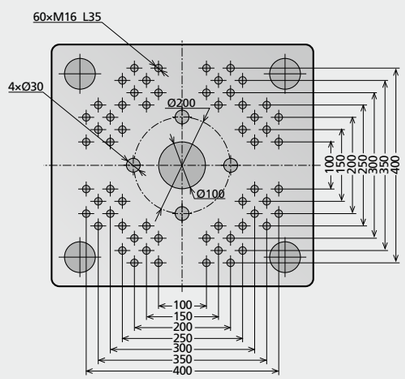


Platen Layout **VE900 II**


European version

unit: mm

Fixed platen

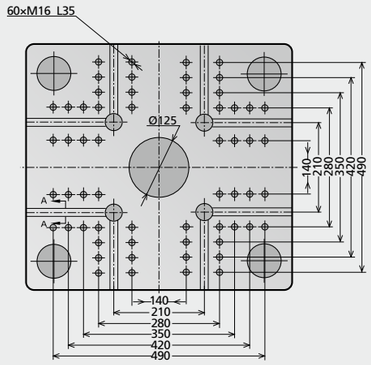


Movable platen

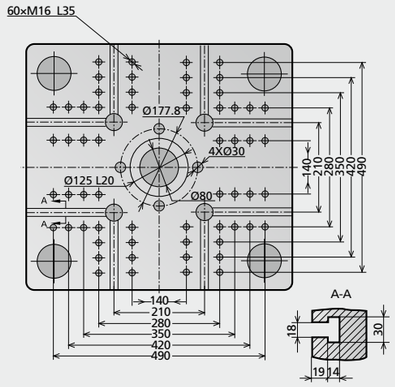


American version

unit: mm

Fixed platen

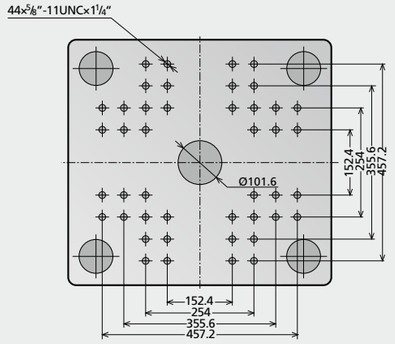


Movable platen

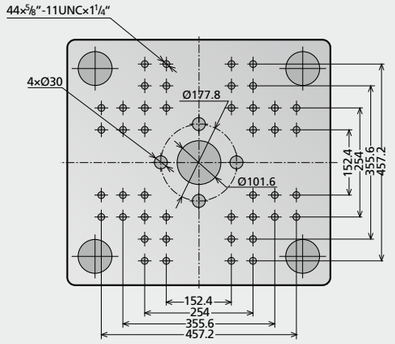


Japanese version

unit: mm

Fixed platen

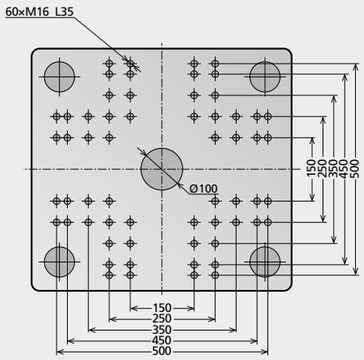

Movable platen

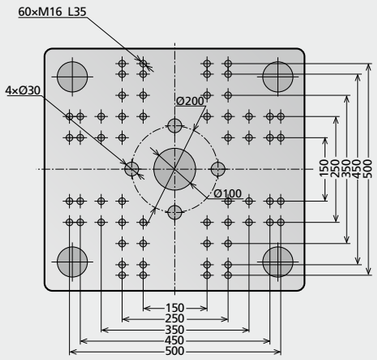


Platen Layout **VE1200 II**


European version

unit: mm

Fixed platen

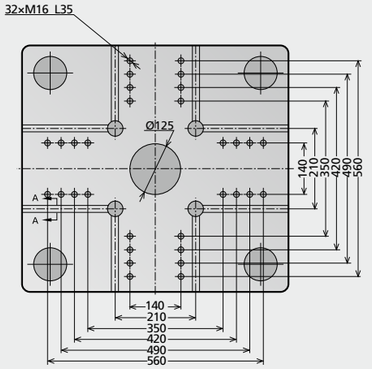


Movable platen

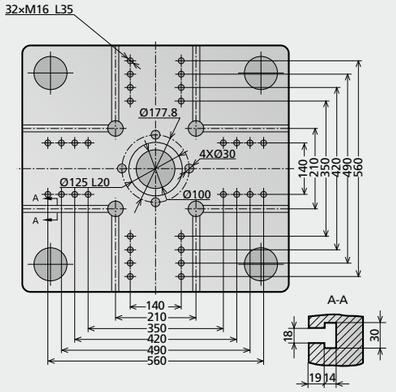


American version

unit: mm

Fixed platen

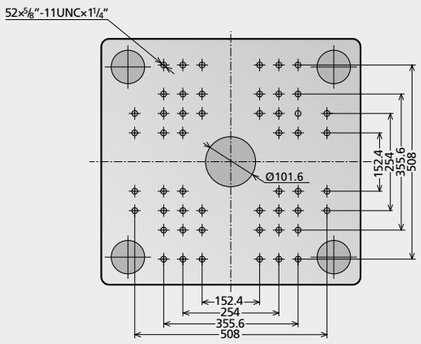


Movable platen

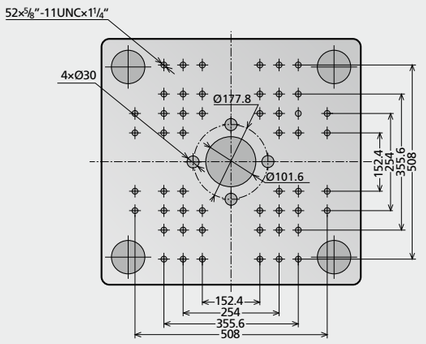


Japanese version

unit: mm

Fixed platen

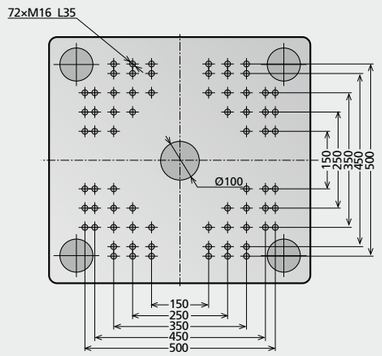

Movable platen

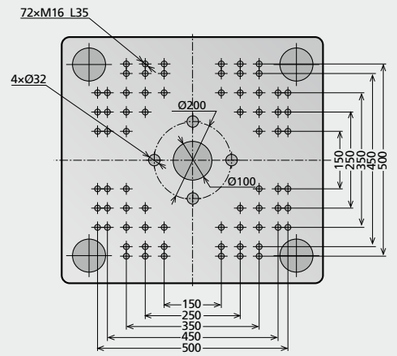


Platen Layout **VE1500 II**


European version

unit: mm

Fixed platen

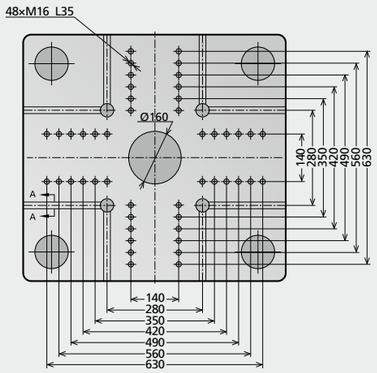


Movable platen

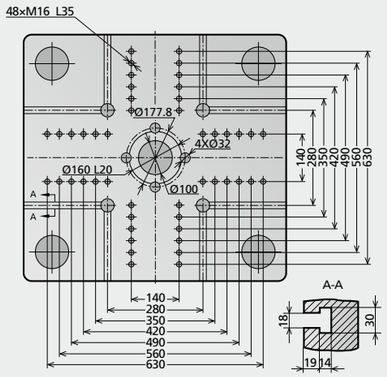


American version

unit: mm

Fixed platen

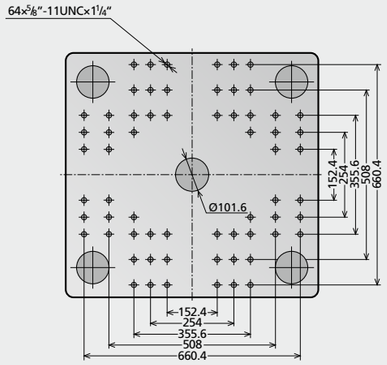


Movable platen

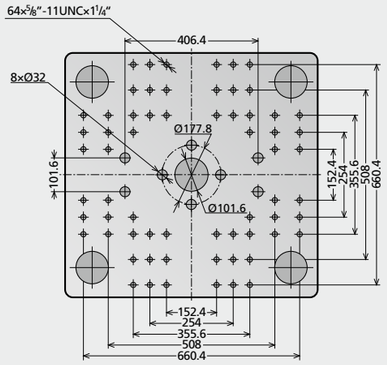


Japanese version

unit: mm

Fixed platen

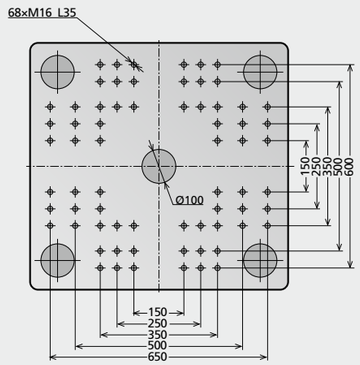

Movable platen

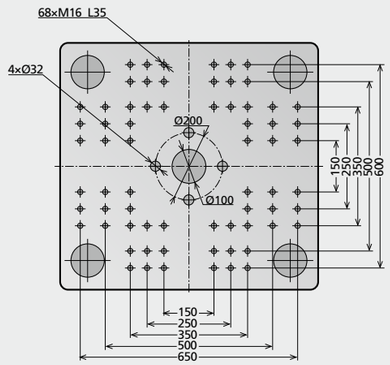


Platen Layout **VE1900 II**


European version

unit: mm

Fixed platen

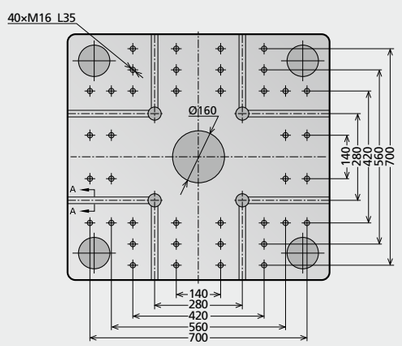

Movable platen

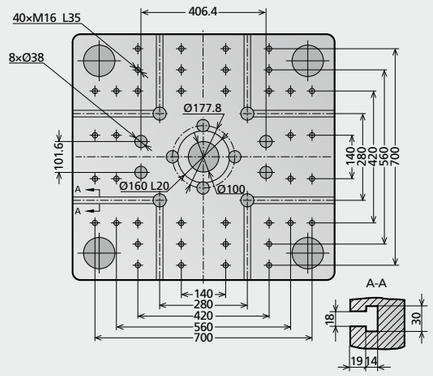

American version

unit: mm


Fixed platen

Movable platen


Japanese version

unit: mm

Fixed platen

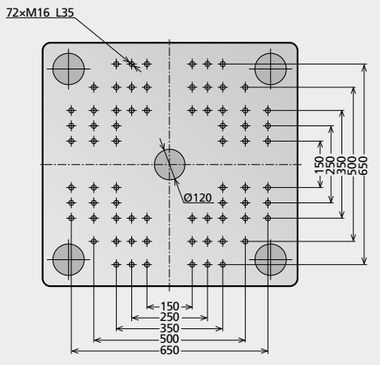

Movable platen

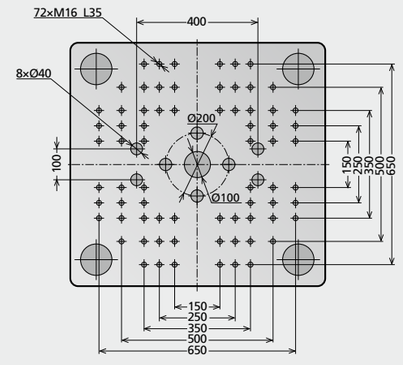


Platen Layout **VE2300 II**


European version

unit: mm

Fixed platen

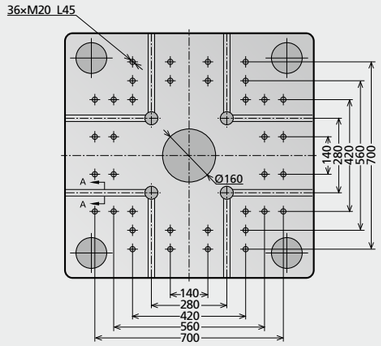

Movable platen

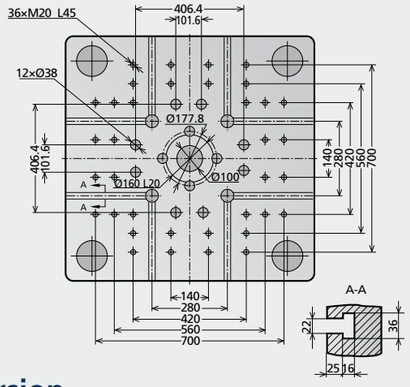

American version

unit: mm


Fixed platen

Movable platen


Japanese version

unit: mm

Fixed platen

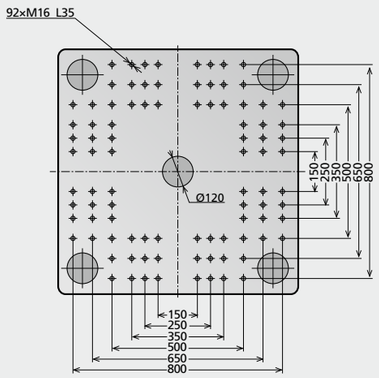

Movable platen

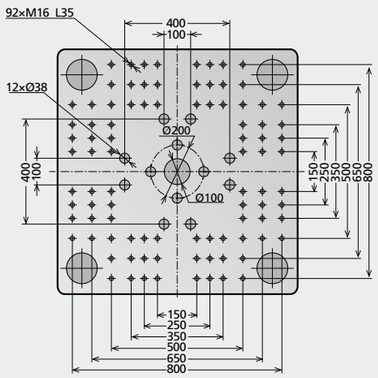


Platen Layout **VE3000 II**


European version

unit: mm

Fixed platen

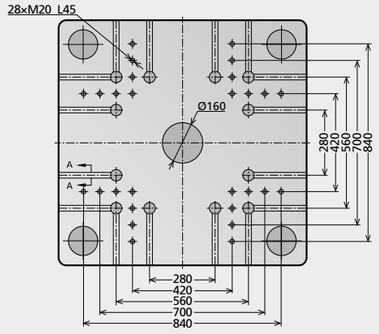


Movable platen

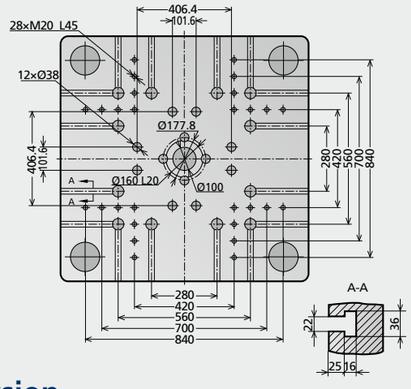


American version

unit: mm

Fixed platen

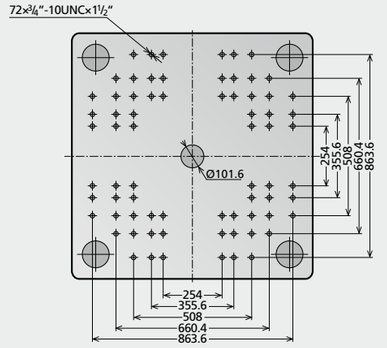


Movable platen

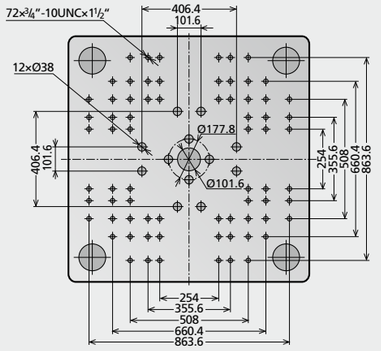


Japanese version

unit: mm

Fixed platen

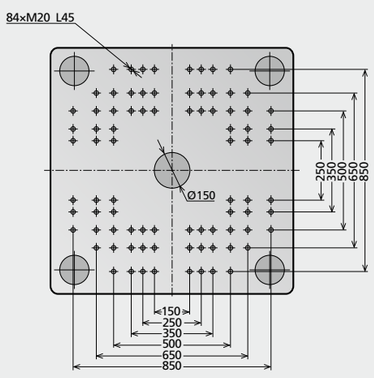

Movable platen

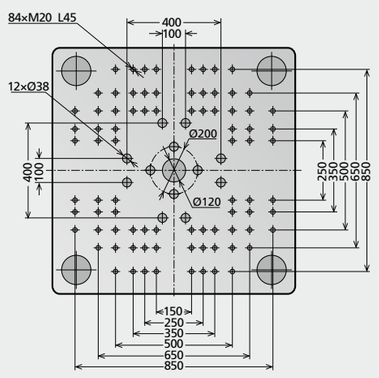


Platen Layout **VE3600 II**


European version

unit: mm

Fixed platen

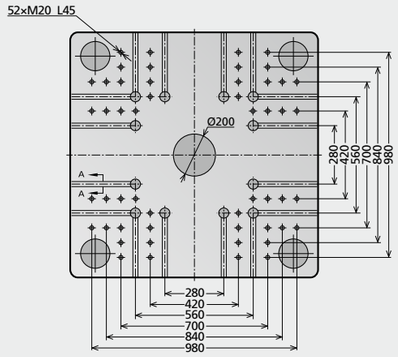


Movable platen

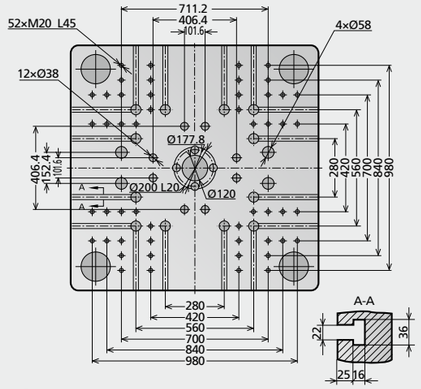


American version

unit: mm

Fixed platen

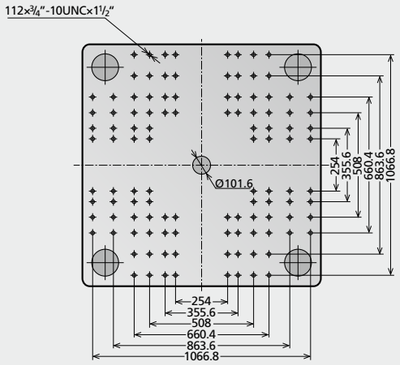


Movable platen

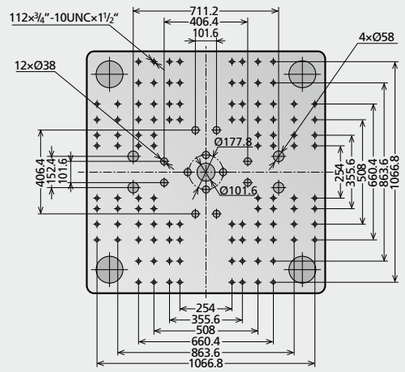


Japanese version

unit: mm

Fixed platen

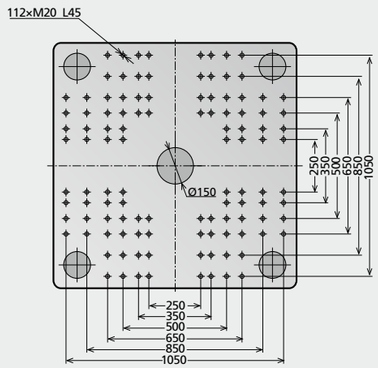

Movable platen

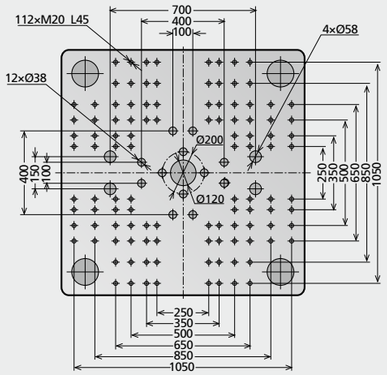


Platen Layout **VE4500 II**


European version

unit: mm

Fixed platen

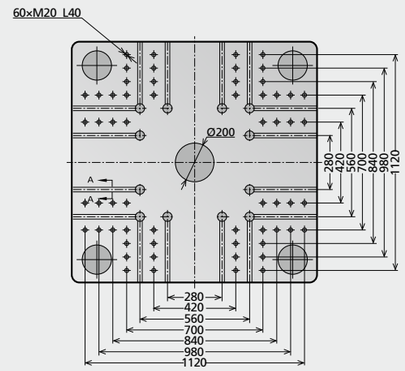


Movable platen

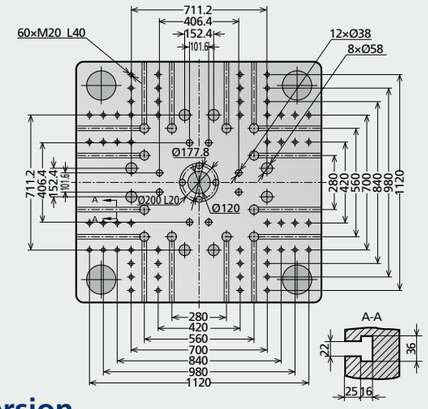


American version

unit: mm

Fixed platen

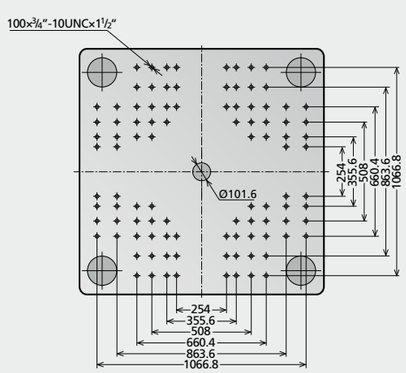


Movable platen

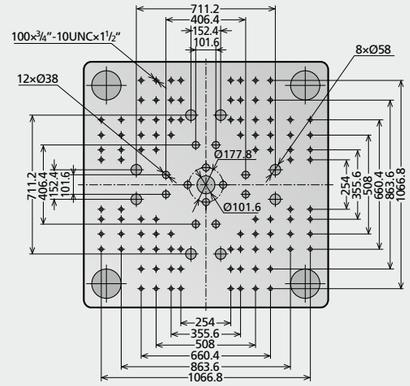


Japanese version

unit: mm

Fixed platen

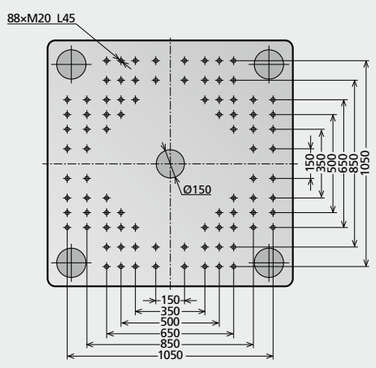

Movable platen

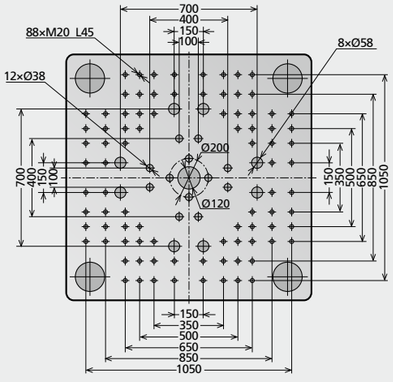


Platen Layout **VE5500 II**


European version

unit: mm

Fixed platen

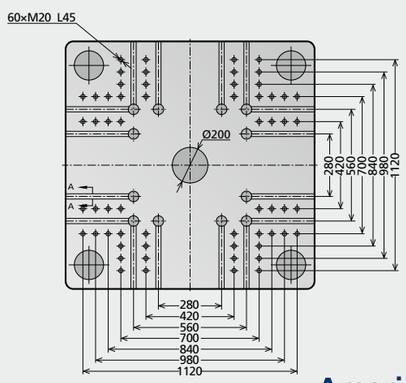


Movable platen

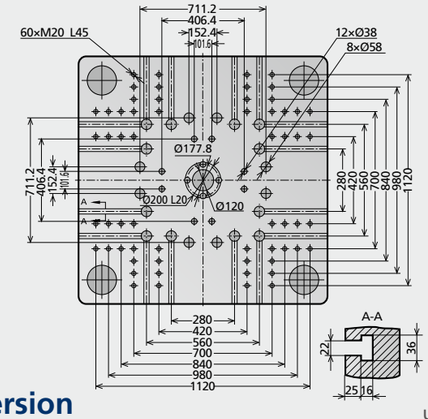


American version

unit: mm

Fixed platen

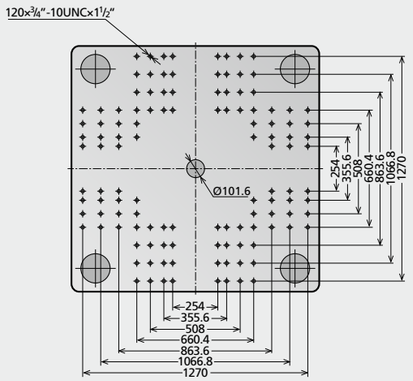


Movable platen

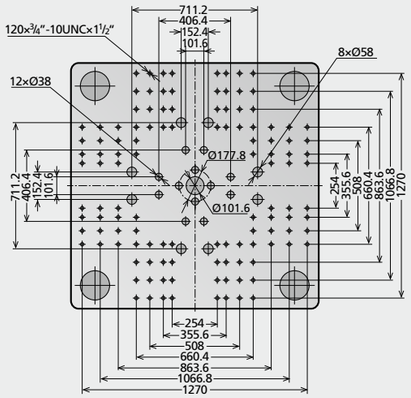


Japanese version

unit: mm

Fixed platen

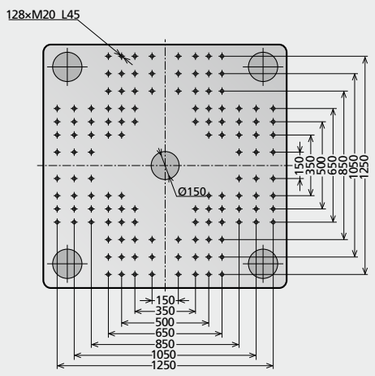

Movable platen

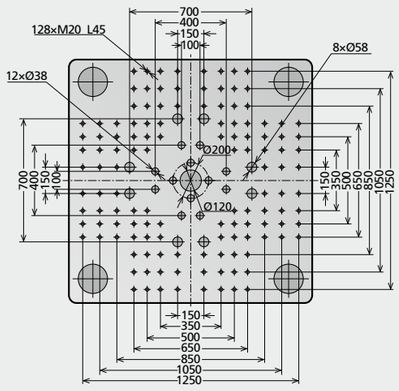


Platen Layout **VE6500 II**


European version

unit: mm

Fixed platen

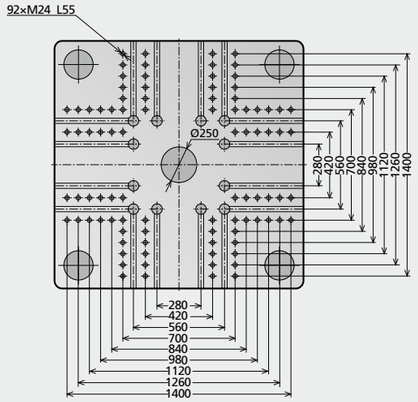


Movable platen

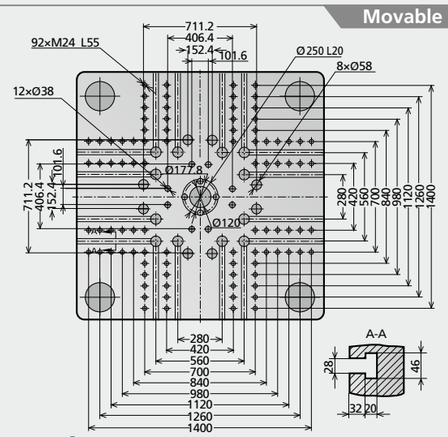


American version

unit: mm

Fixed platen

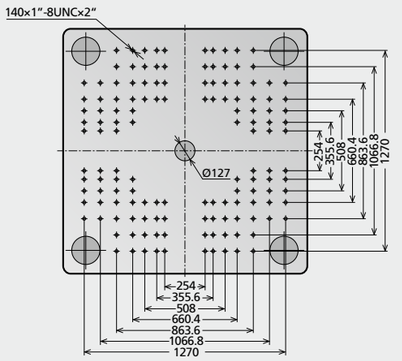


Movable platen

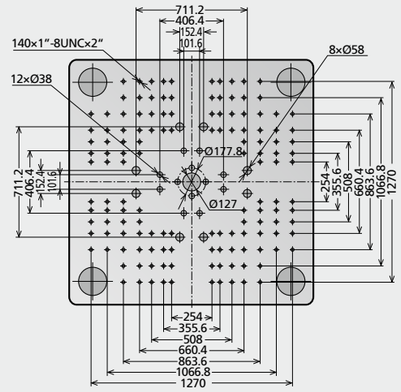


Japanese version

unit: mm

Fixed platen

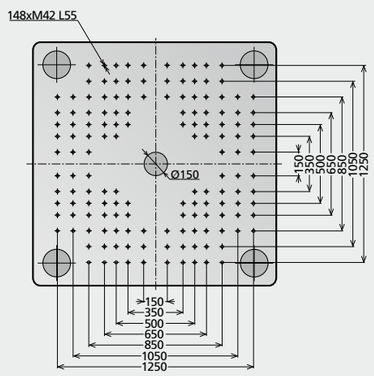

Movable platen

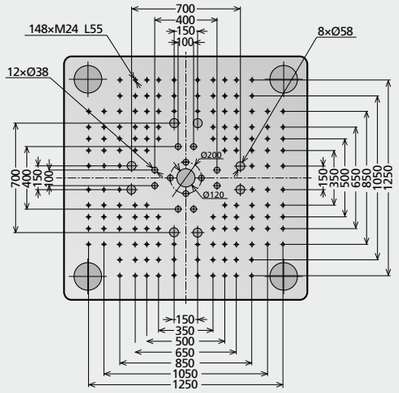

Standard Equipment List

Injection Unit

- Abrasion-resistant screw unit (open nozzle)
- Nozzle safety guard
- 6 injection steps
- 4 pressure holding steps
- 3 dosing steps
- 3 back pressure steps
- Screw suck back select (after holding/after dosing)
- Screw suck back delay function
- Injection delay function
- Dosing delay function
- Intrusion/filling by rotating screw
- V/P switch over mode (position, time, pressure, speed)
- Injection speed response mode select
- Injection pressure segment control
- Speed limit during holding pressure
- Screw postion setting (unit: 0.01mm)
- Screw rotation speed setting
- Holding pressure time setting
- Mold open available during dosing
- Barrel heating closed-loop control (K/J type available)
- Barrel temperature holding function
- Barrel temperature auto tunning function
- Barrel pre-heating function
- Barrel temperature synchronous control
- Material overheating prevention function
- Screw cold start prevention
- Auto purge function
- Screw rotation speed display
- Setting for nozzle movement (switch/time)
- Selection of nozzle retract (3 modes)
- Nozzle contact device
- Nozzle centre adjustable
- Feeding throat temperature closed-loop control
- Injection unit swiveling device
- Independent nozzle temperature control

Clamping unit

- 6 mold moving steps
- Mold safety protection
- Mold setup mode
- Injection compression function
- Clamping force pre-release during cooling
- Injection during clamping (pre-injection)
- 2 step mold close/clamp process
- In mold cut function (ejector activate when mold closed)
- Clamping safety device (mechanical and electrical)
- Adjustable moving platen support
- Clamping force setting
- Ejector device
- Ejector function deactivatable
- 3 ejector steps
- Ejector forward delay function
- Ejector vibration function
- Ejector A/B function (2 steps ejector stroke)
- Eject on the fly
- Ejector plate return signal confirmation
- Cooling water distributor (6 sets up to 1500 II, 8 sets for others)
- Embedded locating ring (fixed platen)
- In mold ejector pin protection interface
- Mold installation mode (low speed mold move)
- Needle shut off nozzle interface (one spare electrical interface)
- Emergency stop (operating and non-operating sides)
- Robot mounting layout
- Central lubrication system
- S-curve flexible control for mold movement

Controller & Monitor

- 15 inch TFT color touch screen
- Mold profile data memory (up to 200 sets)
- Alarm history
- Data setting record
- 3 USB R/W interface
- Injection pressure and speed curve display and record
- Euromap 12 robot interface
- Multi-language available (Chinese, German, English, Japanese etc.)
- Metric/Imperial unit select
- I/O monitor display
- Printer interface(USB connector)
- Production cycle monitor
- Production profile monitor
- Production data record (5000 cycles display, 100,000 cycles record)
- Production data graphics
- Quality parameters tolerance setting
- Quality abnormal alarm
- Cycle counter
- Machine overview display
- Main data setting fast access
- Machine maintenance administration
- Clamping force curve display
- Barrel temperature monitor
- Display cycle time sequences in each phase
- 3 Color alarm lamp(red/yellow/green)
- Alarm buzzer
- Injection overfill prevention (HPM)
- Display of actual performance data
- Multi-action selectable during machine alarm

Others

- Standard Zhafir color
- Adjustable machine pads
- 3 Power sockets (two 16A and one 32A)
- Standard hopper
- Mold clamper
- T-screw nuts (for T-slot use)
- Hopper slide movement support
- Tools box
- Spare parts
- Machine cover

Options List

Injection Unit

- Chrome-plating screw unit
- Corrosion and abrasion resistant screw unit
- High performance nozzle heating band
- Extended nozzle
- V/P switch based on in-mold pressure
- Needle shut off nozzle
- Spring nozzle
- Nozzle head customization
- Stainless steel hopper

Clamping unit

- Air blow
- Pneumatic ejector
- Hydraulic power pack (For core and valve gate)
- Hydraulic core interface (Programable)
- Pneumatic core interface (Programable)
- Valve Gate control interface
- Glass tube water flowmeter
- Customized mold platen (T-slot,threaded holes)
- Mold unscrew electrical interface
- Mold height extension
- Mold slide block protection interface
- Eject compression function
- Mold auto clamp device (Pneumatic/hydraulic)
- Ejector unit with brake
- Intergrated hot runner controller
- Product drop plate
- Automatic safety gate on operator side
- Clamping force automatically controller
- Quality flap
- Product drop detector

Controller & Monitor

- Mold temperature display and control
- Quality flap interface
- Heating disconnect detection function
- Additional cooling water distributor
- External transformer
- Euromap 67 robot interface
- Gas-assisted injection interface
- Magnetic platen interface
- Mold cavity pressure detection interface

Others

- Safty certification: CE,UL
- Infrared barrel heating band
- Barrel heating insulation cover

NOTE:

NOTE:

NOTE: