


On the Subject of The Cruel Modkit

It is literally do or die, and dying seems likely.

See Appendix A for indicator identification reference.

See Appendix B for battery identification reference.

See Appendix C for port identification reference.



- The module consists of a display with module components, a “❖” button, a “◆” button, multiple smaller buttons and several containers for a wire panel, a button panel, a set of LEDs, a symbol keypad, an alphanumeric keypad, a piano, a set of arrow buttons, and a panel for two bulbs.
- There are also widgets embedded in the module. These include a meter, two resistors, an identity card, a timer, a word display, a number display, and an LED that transmits a message in Morse code*.
- In order to disarm the module, choose the right components for it and then solve it using the corresponding instructions in the pages below.
- Interacting with module components when the current component selection is not the correct one will cause a strike.
- Use the arrow buttons near the top display to cycle between the possible module components and press the “◆” button to toggle the corresponding component.

To avoid confusion, zeros in this manual are represented by the character Ø.

Refer to the steps below to determine what components to include.**

1. Split the serial number into three groups of two characters.
2. Take the individual groups and multiply their characters together using their Base36 values.
3. Take the sum of each of the three products, modulo 256.
4. Convert the number to binary.
5. With the first digit of the binary number representing the wires component, activate each component that has a 1.

*Go [here](#) for a Morse Code reference.

**Since sub-modules are still being created, install the [Tweaks](#) mod to access the settings which will allow you to choose the sub-module chosen in-game.

On the Subject of Timer Timings

"Okay, give a read on the module." "There's nothing." "Okay... 6/3." "No, there's actually nothing." "1/8." "No... THERE IS NOTHING ON THE MODULE!" "9/2."

Note: If your module contains **any** components, you are looking at the wrong section of this manual!

Press the "❖" button to activate the module. The timer on the module will begin displaying random digits from 000000-99999, changing every second. The number display will also give a number. Refer to the table below to find out what number to submit. The left-most digit represents A, and the right-most digit represents B.

Number Display	Rule
0	$A + B = \text{a prime number}^*$
1	$A > \text{amount of lit indicators}, B \leq \text{amount of unlit indicators}$
2	$A / B = \text{a whole number}$
3	A and B concatenated = a multiple of the module count, excluding needles**
4	The digital root of $A + B$ is odd
5	A or B matches a digit on the bomb timer
6	$B - \text{Last digit of } S\# \leq A$
7	$B - A > \text{the number of distinct ports modulo } 10$
8	$A + B \geq \text{sum of } S\# \text{ digits modulo } 18$
9	A and B = the amount of lit or unlit indicators.

When the rule applies to the digits, press the "❖" button again to solve the module. Pressing the "❖" button when the numbers displayed are invalid will result in a strike.

**0 in this module is considered a composite number.*

***If the module count is over 1000, press the "❖" button when A and B share parity with the last digit of the serial number.*

On the Subject of Unscrew Maze

No, I'm not adding a reset button. If you get lost, you're screwed (pun intended).

Note: If your module's components aren't exactly [Arrows, Bulbs], you are looking at the wrong section of this manual!


On the module are two bulbs, four arrows, and a morse LED.

Your current position in the maze is equal to the first character given in the Morse LED. Convert the character from Base36 to decimal, and use the cell that shows up in reading order (top left cell is 0). The same applies to the Bulb positions, using the second character for the left bulb and the third for the right.

To unscrew a bulb, go to its coordinates. To solve the module, unscrew both bulbs. Unscrewing a bulb when you're not at its coordinates or hitting a wall will cause a strike, resetting your position in the maze to the starting position, but it won't reset the module.

To move through the maze:

- If the center button is white, move using the arrow's direction.
- If the center button is grey, move using the arrow's color.
(Red = Up, Yellow = Right, Green = Down, and Blue = Left)

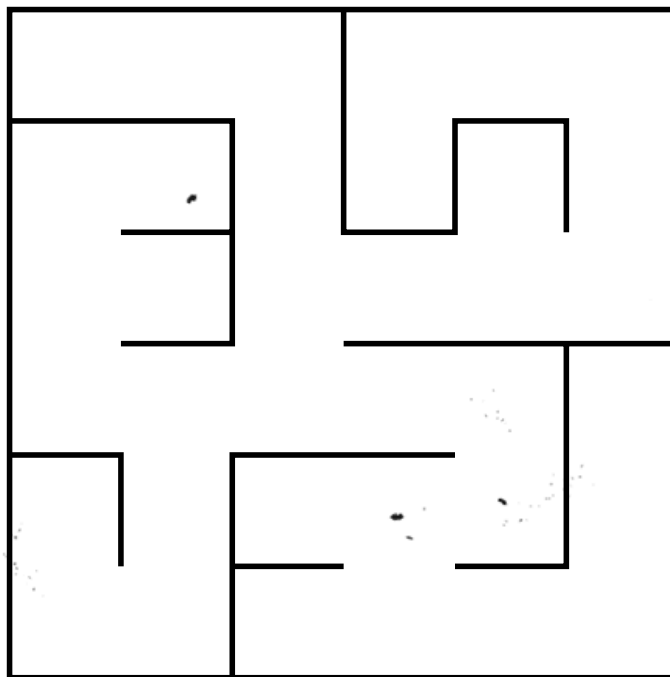

$\frac{1}{x^2} = x^{-2}$

Interpret the LED as Morse Code and decode it to get a text string. Go through the below conditions to decrypt the word.

- Caesar Shift the letters forward by the amount of indicators on the bomb. If there are no indicators, shift the letters backward instead and use the last digit of the serial number.
- If the port count is equal to or less than the port plate amount, apply the Rail Fence Cipher with a key of 3.
- Apply Affine $\times X$ Cipher, with X being (the indicator count * first digit of serial number) + 1.
- If the current text string has a letter in the serial number, apply the ROT13 Cipher.
- Apply Atbash Cipher.

If done correctly, the resulting string will be a word in the table on the next page. The word will correspond to a piano sequence. To solve the module, input this piano sequence into the module. Inputting the wrong key will cause a strike, resetting the module's presses. Pressing the ♠ symbol will also reset the piano presses.

Decrypted word	Piano sequence
ANSWER	E F# F# F# F# E E E
BANTER	A E F G F E D D F A
CREOLE	Bb Bb Bb Bb Gb Ab Bb Ab Bb
DRIVEN	B D A G A B D A
ELEVEN	E E E C E G G
FAKERS	Eb Eb D D Eb Eb D Eb Eb D D Eb
GARAGE	G G C G G C G C
HORROR	C# D E F C# D E F Bb A
JULIET	Bb A Bb F Eb Bb A Bb F Eb
KEVLAR	G G G Eb Bb G Eb Bb G
NETHER	C# B A F# G# A G# F#
OPIOID	G A G E G A G E
PARENT	G G G G G G G Bb Eb F G
QUESTS	F# G A A D B A G E D
UMPIRE	Eb Eb Db Ab Eb Eb F Db
VICTOR	B A G Eb D A B A G
WIRING	Eb F Eb C Ab F Eb
XENONS	D D D C# C# C# B C# B F#
YIELDS	G E F G C B C D C B A G
ZAMBIA	Bb A Bb G (repeat this until the module solves)

Decrypting Ciphers:

Caesar Shift (Cipher): shift every letter of the encrypted word forwards/backwards through the alphabet a number of times equal to the offset (looping around the alphabet if needed).

ROT13 Cipher: shift every letter of the encrypted word forwards/backwards (the direction does not matter) 13 times (looping around the alphabet if needed).

Atbash Cipher: for each of the encrypted word's letters:

- Convert the letter into its alphabetic position (AOZ25) to get a number.
- Subtract that number from 25.
- Convert the result to a letter AOZ25 to get the decrypted letter.

Affine *X Cipher: for each of the encrypted word's letters:

- Convert the letter into its alphabetic position (AOZ25) to get a number.
- Keep adding 26 to the number until it becomes divisible by X.
- Divide the number by X.
- Convert the result to a letter AOZ25 to get the decrypted letter.

Example

Encrypted word: SNUYCP

X = 7

$$S = 18 + 26 = 44 + 26 = 70 / 7 = 10 \rightarrow K$$

$$N = 13 + 26 = 39 + 26 = 65 + 26 = 91 / 7 = 13 \rightarrow N$$

$$U = 20 + 26 = 46 + 26 = 72 + 26 = 98 / 7 = 14 \rightarrow O$$

$$Y = 24 + 26 = 50 + 26 = 76 + 26 = 102 + 26 = 128 + 26 = 154 / 7 = 22 \rightarrow W$$

$$C = 2 + 26 = 28 / 7 = 4 \rightarrow E$$

$$P = 15 + 26 = 41 + 26 = 67 + 26 = 93 + 26 = 119 / 7 = 17 \rightarrow R$$

Decrypted word: KNOWER

Note: In some cases, some letters can have ambiguous decryptions.

Example: X = 10, the letter is Q, which can be decrypted to either A or N.

Rail Fence Cipher:

- Create as many rails (rows) top-to-bottom as the key number with the length of each rail being equal to the length of the encrypted word.
- Place down asterisks in a zig-zag pattern starting from the top left corner (going down-right until you reach the bottom rail, then going up-right until you reach the top rail, and so on).
- In reading order, fill in the asterisks with the letters of the encrypted word.
- Read the letters in the same zig-zag pattern to obtain the decrypted word.

Example

Encrypted word: REAGRN

Key = 3

* *

* * *

*

↓ ↓ ↓

R E

A G R

N

Decrypted word: RANGER

On the Subject of AV Input

Audio Visual. That's what it stands for. Anything else is pure coincidence.

Note: If your module's components aren't exactly **[Piano, Bulbs]**, you are looking at the wrong section of this manual!

Each bulb will switch its light state (on to off and vice versa) when the piano key pressed is part of a certain five-note scale chosen for that bulb. Any other key not part of the scale chosen will either turn it on (or do nothing when it's already on) or turn it off (or do nothing when it's already off).

Each key cannot be pressed twice in a row. Doing so will yield a strike immediately and switch off both bulbs.

When ready, unscrew a bulb, then press the five piano keys in any order that make up the scale chosen for that bulb, then screw the bulb back in. A strike will be given upon screwing the bulb when an incorrect scale is inputted. Otherwise, the bulb will remain deactivated, and stay off upon any input from the piano.

Deactivate the two bulbs to solve the module.

The I/O buttons function to turn both light bulbs off and disregard the last piano key pressed, effectively functioning as reset buttons. However, they can only be used after each piano key has been pressed at least once. If the last piano key pressed is a white key, use the I button. Otherwise, use the O button. Pressing the wrong button will strike and not reset the module.

On the Subject of Who's Who

Wait, so the person on first was Simon? Nonsense! The person on first was actually [REDACTED]!

Note: If your module's components aren't exactly [LED, Bulbs], you are looking at the wrong section of this manual!

Go through the following conditions to determine what LED to use.

- If all the digits of the serial number have matching parity, use the third LED.
- Otherwise, if the amount of batteries matches a number in the serial number, use the eighth LED.
- Otherwise, if the amount of lit and unlit indicators are equal, use the first LED.
- Otherwise, if three or more LEDs are warm colors (red, orange, or yellow), use the seventh LED.
- Otherwise, if the port plate count is less than or equal to the port count, use the fifth LED.
- Otherwise, if two matching LEDs are next to each other, use the second LED.
- Otherwise, if a DVI-D port is on the same port plate as a Stereo RCA port OR a PS/2 port, use the sixth LED.
- Otherwise, if there are only D batteries or AA batteries, use the fourth LED.
- Otherwise, sum the digits in the serial number modulo 8 add 1. Use the corresponding LED.

Using the color received in the table below will give an offset and a row.

Color	+1	+2	+3	-3	-1	-2	+4	+5	-5	-4	+6
Row	3	2	2	4	5	1	6	7	3	1	8

The table below lists the words that can appear on the word display. Use the row in the table below; the column is the LED position.

Note the word given from the position. Shift the rows by the offset of the initial LED, and shift the columns by the offset of the cell's color. A positive shift means to shift the rows down and the columns to the right. Repeat this until either you repeat words or ten words have been used. Call this list "List A". Pressing the I/O buttons cycles the word display through a list called List B, wrapping around. Pressing the "❖" button will reset the module to the first word on List B. Take the first word on List B that matches a word on List A.

Take the word's position in both the row and the column and add them together mod 10.* To solve the module, enter submission by holding the I/O buttons for one second. Pressing I/O will increment the number display, and holding either button will submit the number. Inputting the wrong number issues a strike and exits submission but **does not** reset the module.

**If List B has no word in List A, the number to use is 0.*

	1	2	3	4	5	6	7	8
1	Yes	First	Display	A Display	Okay	Ok	Says	Sez
2	Nothing		Blank	It's Blank	No	Know	Nose	Knows
3	Led	Lead	Leed	Read	Red	Reed	Hold On	You
4	U	You Are	UR	Your	You're	There	They're	Their
5	They Are	See	C	Sea	Cee	Ready	What	What?
6	Uh	Uhhh	Uh Uh	Uh Huh	Left	Right	Write	Middle
7	Wait	Wait!	Weight	Press	Done	Dumb	Next	Hold
8	Sure	Like	Lick	Leek	Leak	I	India	Eye

On the Subject of Simon Skips

Like a disoriented grasshopper...

Note: If your module's components aren't exactly [LED, Arrows], you are looking at the wrong section of this manual!

To solve the module you must submit a color sequence on the arrows and sliders. For this sub-module, 1 clockwise from the top arrow is the top-right slider.

To initiate the module, press the "❖" button. The LEDs will change colors to contain only the colors that appear on the arrows or a close representation of those colors:

- Magenta slider -> Purple LED
- Grey slider -> Black LED

Figure out the starting color by doing the following:

- Take the product of all non-zero digits in the serial number;
- Add the number on the number display;
- Take the result modulo 8, call the result **X**;
- On the arrows, start at the top arrow, then go **X** times clockwise;
- The color of the arrow/slider you land on is the starting color.

After calculating the starting color, press it on the arrows or sliders, **UNLESS** it is black or white, in which case press the center button on the arrows to immediately submit an empty sequence.

Next, for each LED:

- Count the number of times you need to go clockwise from the previously pressed color to the current LED color on the arrows or sliders.
- Go that many times counter-clockwise from the previously pressed color on the arrows.
- If the color you land on is black or white, press the Center Button on the arrows to submit your sequence. Otherwise, press the color you landed on.

If you went over all 8 of the LEDs without ever landing on black or on white, press the center button to submit.

Upon submission, if the submitted sequence was correct, the module will solve. Otherwise, a strike will be given and the inputted sequence will reset.

On the Subject of Metered Button

Also known as the Foot Button if you're American.

Note: If your module's components aren't exactly [Button], you are looking at the wrong section of this manual!

Note the color of the button along with its text, then press the "❖" button to initiate the module.

The meter will now rise. You have 1:30 to submit your answers, or the module will strike and reset.

Input the text and color of the button into the table below to get a number.

Text ↓	Color									
	R	O	Y	L	G	C	B	P	K	W
Press	1	Ø	2	9	3	8	4	7	5	6
Hold	6	1	Ø	2	9	3	8	4	7	5
Detonate	5	6	1	Ø	2	9	3	8	4	7
Mash	7	5	6	1	Ø	2	9	3	8	4
Tap	4	7	5	6	1	Ø	2	9	3	8
Push	8	4	7	5	6	1	Ø	2	9	3
Abort	3	8	4	7	5	6	1	Ø	2	9
Button	9	3	8	4	7	5	6	1	Ø	2
Click	2	9	3	8	4	7	5	6	1	Ø
	Ø	2	9	3	8	4	7	5	6	1
Nothing	1	2	3	4	5	6	7	8	9	Ø
No	Ø	9	8	7	6	5	4	3	2	1
I Don't Know	9	8	7	6	5	4	3	2	1	Ø
Yes	2	4	6	8	Ø	1	3	5	7	9

Call the received value "Value A" and input it into the table below to get an instruction.

Value A ↓	Number Display									
	0	1	2	3	4	5	6	7	8	9
0	T6	H5	M3	T1	H7	M8	T1	H2	M5	X8
1	X5	H6	T1	M5	H1	T9	M9	H4	T8	M1
2	M5	T8	H5	M3	T5	H7	X6	T1	H3	M6
3	H3	M7	M6	H2	M3	T5	T2	X4	T2	H7
4	T4	H9	M9	H4	M8	X9	T8	T3	H5	M1
5	M1	M2	X1	M9	T9	M4	H3	H8	T4	M3
6	H2	M1	T4	T7	X3	H6	M7	T5	H7	H4
7	T8	H3	M2	X9	T2	H1	H4	M6	M1	T1
8	M9	X2	H8	T8	M4	T3	M6	H7	H3	T8
9	T7	T4	M4	H6	H7	M2	M5	T9	X7	H9

- T#: Tap the button when the last digit of the bomb timer is a #.
- H#: Hold the button when the last digit of the bomb timer is (# + battery count) modulo 10, and release when the last digit of the bomb timer is |# - port count|.
- M#: Mash the button # times across 3 seconds.
- X#: Press the "❖" button (last digit of S#† * #, modulo 25) times, then tap the button.

Correctly performing the instruction will refresh the number display and the button and advance a stage. Completing all three stages will solve the module. Incorrectly pressing the button will cause a strike, resetting the module.

†If this number is 0, add 10.

On the Subject of Stumbling Symphony

Was it an E# or an Eb...?.

Note: If your module's components aren't exactly [Button, Piano], you are looking at the wrong section of this manual!

Today, you will be playing a melody for the button to try to impress it and solve the module. You tried your best to practice the melody, but you still might stumble during your performance.

To initiate the module, press the "❖" button. The number display will display a number in such a way, so that the defuser will stumble (explained on the second page of this sub-module) exactly 3-7 times (or 0 in a special case).

To figure out what melody you'll be playing, take the new number on the number display, and use it in the table below to obtain your melody.

Number Display	Melody Name	Note Sequence
0	Für Elise	E D# E D# E B D C
1	All I Want for Christmas is You	B A G Eb D A B A G
2	It's the Most Wonderful Time of the Year	F# G A A D B A G E D
3	We Three Kings	C# B A F# G# A G# F#
4	Empire Strikes Back	G G G Eb Bb G Eb Bb G
5	Shiny Smily Story	D# F G G# D# A# G# G G# A#
6	Pink Panther	C# D E F C# D E F Bb A
7	Pirates of the Caribbean	A C D D D E F F F G E E
8	Let It Be	E D C E G A G E D C A G E
9	A Town with an Ocean's View	B G B F# B E D C D G A

To determine when you will stumble, follow this list of rules:

- If the button doesn't have a label, you are actually a piano maestro and you will never stumble – play the melody normally to solve the module.
- Otherwise, if the button's label contains 2 or more vowels (not including “Y”), you will stumble on every sharp/flat note.
- Otherwise, if the button's label contains exactly 5 letters, you will stumble on every note from C to F.
- Otherwise, if the button's label is “Yes” or “No”, you will stumble on the first, last, and center* notes in the Note Sequence.
- Otherwise, if the button's label contains the letter “P”, you will stumble on every note from F# to B.
- Otherwise, you will stumble on every third note in the Note Sequence.

If you are going to stumble on the next note, call that note the Stumble Note and do the following:

- Play the Stumble Note shifted X semitones forwards**, where X is the number obtained from the table below:

Button's Color										
Black	Red	Orange	Yellow	Green	Lime	Cyan	Blue	Purple	Pink	White
+1	+2	+3	+4	+5	+6	+7	+8	+9	+10	+11

- Tap the button to soothe its nerves after it heard your stumble.
- Play the Stumble Note normally, and continue playing the Note Sequence.

If at any point you play an incorrect note (including during a stumble), incorrectly tap the button, or forget to tap it at all, a strike will be issued, the button will be disappointed in you, and the input will be completely reset.

**If the length of the Note Sequence is even, there will be 2 center notes. Otherwise, there will be only 1 center note.*

***Shifting forwards: C -> C# -> D -> D# -> E -> ... -> B -> C*

On the Subject of The Deranged Keypad

The person responsible for this mod probably was too obsessed with Blue Arrows.

Note: If your module's components aren't exactly [Button, Alphabet], you are looking at the wrong section of this manual!

The module requires you to press keypads of the Alphabet section. To begin, start with the base alphabet depending on the displayed color of the button:

Color of the Button	Starting Alphabet
Black	ABCDEFGHIJKLMNOPQRSTUVWXYZ
Blue	ETIANMSURWDKGOHVFLPJBXCYZQ
Cyan	GORIYSHQBFLPZATNKVCUJMDEXW
Green	ABCDEGKNPSTXZFHILMOQRUVWY
Lime	SEQUFNCGTHRVIODJWKXYLPMZAB
Orange	WBSMEJTUCPFAHZOQLIKNYVGXRD
Pink	ADGJMPSVYBEHKNQTWZCFILORUX
Purple	BMVFQZYSXJGIWHAEPRLNTKUDCO
Red	XQUMFEPOWLTJDZHGBVYKCRIASN
White	QWERTYUIOPASDFGHJKLZXCVBNM
Yellow	AELFHBRVOTCYDQUXPWGNIMSKZJ

Then, use the label of the button to modify the alphabet:

Label of the Button	Modification
	Do nothing.
PRESS	Move the first letter of the serial number to the beginning. If it's already there, move it to the back.
HOLD	Swap both halves of the string.
DETONATE	Encrypt the string into Atbash (subtract every letter's positions from 27).
MASH	Swap the first consonant with the last vowel in the string.
TAP	Caesar-shift the string forward by the sum of the digits on the Alphabet section.
PUSH	Take all of the letters between (and including) A and E, and move them immediately after Q.
ABORT	Swap the first letter in the string with an odd-numbered alphabetic position with the last letter in the string with an even-numbered alphabetic position.
BUTTON	Multiply the last character's alphabetic position by five, take it modulo 26, add one, and move the corresponding letter to the beginning of the string.
CLICK	Encrypt the string into ROT13 (Caesar-shift the letters forward by 13).
NOTHING	Caesar-shift the first letter in the string forward by one, and move the resulting letter to the end of the string.
NO	Reverse the first half.
I DON'T KNOW	Reverse the entire string.
YES	Reverse the second half.

Once you have performed the operation above, take the letters in the keypads, and go through your modified alphabet until you get to a letter that is present on a keypad that has not already been pressed. Repeat the process with a second press. After two presses, press the button. The button will change text upon being pressed, and you will have to apply the modifications again. Attempting to press a keypad or the button when you're not supposed to will incur a strike, but will NOT reset the module. If more than one button has the same letter, only the leftmost one should be pressed.

On the Subject of Logical Color Combinations

Who knew logic gates become so much harder when you are colorblind?

Note: If your module's components aren't exactly [Button, LEDs, Arrows], you are looking at the wrong section of this manual!

- To disarm the module, submit the correct combinations of LED colors and arrow directions to submit the correct Base 36 number.
- To begin the module, press the "❖" button. A sequence of 8 colors will flash on the arrow module.
- Pressing the "❖" button again will repeat the same sequence.
- Pair each flash with the corresponding LED from left to right.
- Find each pair in the table below where the LED color is the row, the flashing color is the column, and the color of the module's arrow's center button is the main column.
- The intersection is a Base 36 digit.

	White				Grey			
	RED	YELLOW	BLUE	GREEN	RED	YELLOW	BLUE	GREEN
RED	Ø	H	W	M	Z	G	Y	9
ORANGE	S	4	Z	I	U	7	2	H
YELLOW	C	J	V	A	6	B	M	5
LIME	P	2	F	7	W	L	N	D
GREEN	E	9	G	O	A	P	1	J
CYAN	5	T	L	3	O	E	I	C
BLUE	K	6	D	R	F	Ø	X	Q
PURPLE	Q	1	8	X	R	3	T	K
PINK	U	Y	B	N	8	K	4	S
WHITE	Z	Z	Z	Z	Ø	Ø	Ø	Ø
BLACK	Ø	Ø	Ø	Ø	Z	Z	Z	Z

- Concatenate the digits and split them into 4 pairs. Call each pair A-D respectively.
- Convert each pair to binary. Prepend Ø at the start until they are all 11 digits long.
- Find the intersection in one of the two tables below with the button's color used for the row, and the button's label for the column.

- Find the intersection in one of the two tables below with the button's color used for the row, and the button's label for the column.
- The result from the table will give a logic gate and two letter pairs.

	PRESS	HOLD	DETONATE	MASH	TAP	PUSH	ABORT
RED	$\vee$ AB/CD	$\downarrow$ AC/BD	$\wedge$ AB/CD	$\vee$ AB/CD	$\downarrow$ BD/AC	$\leftrightarrow$ BD/AC	$\downarrow$ BD/AC
ORANGE	$\downarrow$ AD/BC	$\leftrightarrow$ AB/CD	$\vee$ BD/AC	$\vee$ AD/BC	$\downarrow$ AC/BD	$\wedge$ AC/BD	$\vee$ AD/BC
YELLOW	$\vee$ BC/AD	$\wedge$ AD/BC	$\downarrow$ CD/AB	$\downarrow$ AB/CD	$\downarrow$ BD/AC	$\downarrow$ AB/CD	$\vee$ AC/BD
LIME	$\leftrightarrow$ BD/AC	$\downarrow$ AC/BD	$\vee$ AB/CD	$\wedge$ BD/AC	$\downarrow$ AC/BD	$\vee$ AC/BD	$\leftrightarrow$ BC/AD
GREEN	$\downarrow$ AD/BC	$\wedge$ AC/BD	$\leftrightarrow$ AD/BC	$\wedge$ AB/CD	$\wedge$ AD/BC	$\vee$ BC/AD	$\downarrow$ CD/AB
CYAN	$\wedge$ CD/AB	$\leftrightarrow$ CD/AB	$\vee$ AD/BC	$\downarrow$ AD/BC	$\vee$ BD/AC	$\downarrow$ BC/AD	$\leftrightarrow$ AC/BD
BLUE	$\vee$ BC/AD	$\wedge$ BC/AD	$\downarrow$ CD/AB	$\leftrightarrow$ AB/CD	$\vee$ AC/BD	$\vee$ BC/AD	$\downarrow$ AD/BC
PURPLE	$\vee$ CD/AB	$\leftrightarrow$ AC/BD	$\vee$ BD/AC	$\leftrightarrow$ BC/AD	$\vee$ AB/CD	$\downarrow$ BC/AD	$\downarrow$ AC/BD
PINK	$\downarrow$ BC/AD	$\vee$ AD/BC	$\downarrow$ BC/AD	$\vee$ CD/AB	$\leftrightarrow$ AD/BC	$\wedge$ BC/AD	$\downarrow$ CD/AB
BLACK	$\downarrow$ AB/CD	$\vee$ AC/BD	$\downarrow$ AB/CD	$\wedge$ BD/AC	$\leftrightarrow$ CD/AB	$\vee$ BD/AC	$\vee$ CD/AB
WHITE	$\wedge$ AB/CD	$\leftrightarrow$ AC/BD	$\downarrow$ BD/AC	$\vee$ BD/AC	$\vee$ AC/BD	$\vee$ BC/AD	$\wedge$ CD/AB

	BUTTON	CLICK		NOTHING	NO	I DON'T KNOW	YES
RED	$\downarrow$ AB/CD	$\downarrow$ BD/AC	$\wedge$ AC/BD	$\vee$ BC/AD	$\wedge$ BD/AC	$\leftrightarrow$ BC/AD	$\vee$ AD/BC
ORANGE	$\wedge$ BC/AD	$\downarrow$ AC/BD	$\downarrow$ BC/AD	$\leftrightarrow$ CD/AB	$\vee$ BD/AC	$\vee$ AB/CD	$\downarrow$ CD/AB
YELLOW	$\vee$ CD/AB	$\vee$ AC/BD	$\leftrightarrow$ AB/CD	$\vee$ AC/BD	$\downarrow$ AD/BC	$\wedge$ AB/CD	$\leftrightarrow$ AB/CD
LIME	$\downarrow$ AC/BD	$\vee$ AD/BC	$\downarrow$ BC/AD	$\vee$ BC/AD	$\leftrightarrow$ AC/BD	$\downarrow$ BD/AC	$\wedge$ CD/AB
GREEN	$\wedge$ AB/CD	$\downarrow$ CD/AB	$\wedge$ AD/BC	$\vee$ AD/BC	$\vee$ BD/AC	$\downarrow$ AD/BC	$\downarrow$ AC/BD
CYAN	$\leftrightarrow$ AD/BC	$\vee$ BD/AC	$\vee$ AB/CD	$\downarrow$ AD/BC	$\vee$ AB/CD	$\wedge$ BC/AD	$\leftrightarrow$ BD/AC
BLUE	$\downarrow$ AB/CD	$\wedge$ BD/AC	$\leftrightarrow$ BC/AD	$\downarrow$ BC/AD	$\vee$ AC/BD	$\downarrow$ BD/AC	$\vee$ AC/BD
PURPLE	$\leftrightarrow$ AB/CD	$\downarrow$ BD/AC	$\vee$ BD/AC	$\downarrow$ BD/AC	$\wedge$ CD/AB	$\leftrightarrow$ AD/BC	$\vee$ AD/BC
PINK	$\vee$ BC/AD	$\leftrightarrow$ CD/AB	$\leftrightarrow$ AC/BD	$\wedge$ AD/BC	$\vee$ CD/AB	$\vee$ AB/CD	$\downarrow$ AB/CD
BLACK	$\vee$ CD/AB	$\downarrow$ BC/AD	$\downarrow$ AC/BD	$\vee$ BD/AC	$\leftrightarrow$ AD/BC	$\downarrow$ CD/AB	$\vee$ AC/BD
WHITE	$\vee$ BC/AD	$\leftrightarrow$ BD/AC	$\vee$ AB/CD	$\downarrow$ CD/AB	$\downarrow$ AB/CD	$\downarrow$ AD/BC	$\wedge$ AC/BD

- Apply the logic gate to each letter pair to get 2 binary numbers.
- Convert both binary numbers to Base 36. Prepend 0 until they are 3 digits long. Concatenate the numbers.

Logical Connective	Symbol	Logic Gate Equivalent	Meaning
Conjunction	$\wedge$	AND	Returns true if all inputs are true. Else returns false.
Disjunction	$\vee$	OR	Returns true if any input is true. Else returns false.
Exclusive Disjunction	$\veebar$	XOR	Returns true if exactly one input is true. Else returns false.
Alternative Denial	$\downarrow$	NAND	Returns false if all inputs are true. Else returns true.
Joint Denial	$\uparrow$	NOR	Returns false if any input is true. Else returns true.
Biconditional	$\leftrightarrow$	XNOR	Returns false if exactly one input is true. Else returns true.

- Find each digit in the table below, using the color of the module's arrow's center button is the main column.
- Refer to the row header as the LED color and the column header as the direction to press.

	White				Grey			
	UP	DOWN	LEFT	RIGHT	UP	DOWN	LEFT	RIGHT
RED	Ø	1	2	3	Z	Y	X	W
ORANGE	4	5	6	7	V	U	T	S
YELLOW	8	9	A	B	R	Q	P	O
LIME	C	D	E	F	N	M	L	K
GREEN	G	H	I	J	J	I	H	G
CYAN	K	L	M	N	F	E	D	C
BLUE	O	P	Q	R	B	A	9	8
PURPLE	S	T	U	V	7	6	5	4
PINK	W	X	Y	Z	3	2	1	Ø

- Press the button to enter submission mode. All of the LEDs will turn black except for one.
- Press the button to cycle the current LED to the correct color found in the table above, then press the corresponding arrow direction.
- If the input is correct, the LED will submit and the next LED will light up.
- If the input is incorrect, a strike will be given and the module will exit submission mode. The module will not reset.
- Submit all 6 digits to solve the module.

On the Subject of The Test Puzzle

I guess they do make it easy!

Note: Your module's components can contain anything!

To disarm the module, press the "❖" button. Otherwise, this module cannot strike.