


PINOUT:

UART TX PA2*
 UART RX PA3*
 SWCLK PA5*
 SWDIO PB14*
 SWO PA10*
 nRST PB0*


AUX_LED PB8
 ERR_LED PB10
 LED1+LED2 PA9

*) BMP "stlink" default


USB connector



USB ESD protection

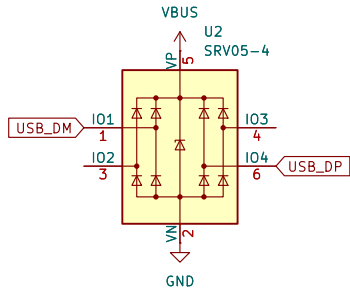


USB pull-up



To flash FW into this debugger




Optional GPIO header (e.g. SPI)




H1 MountingHole


H3 MountingHole

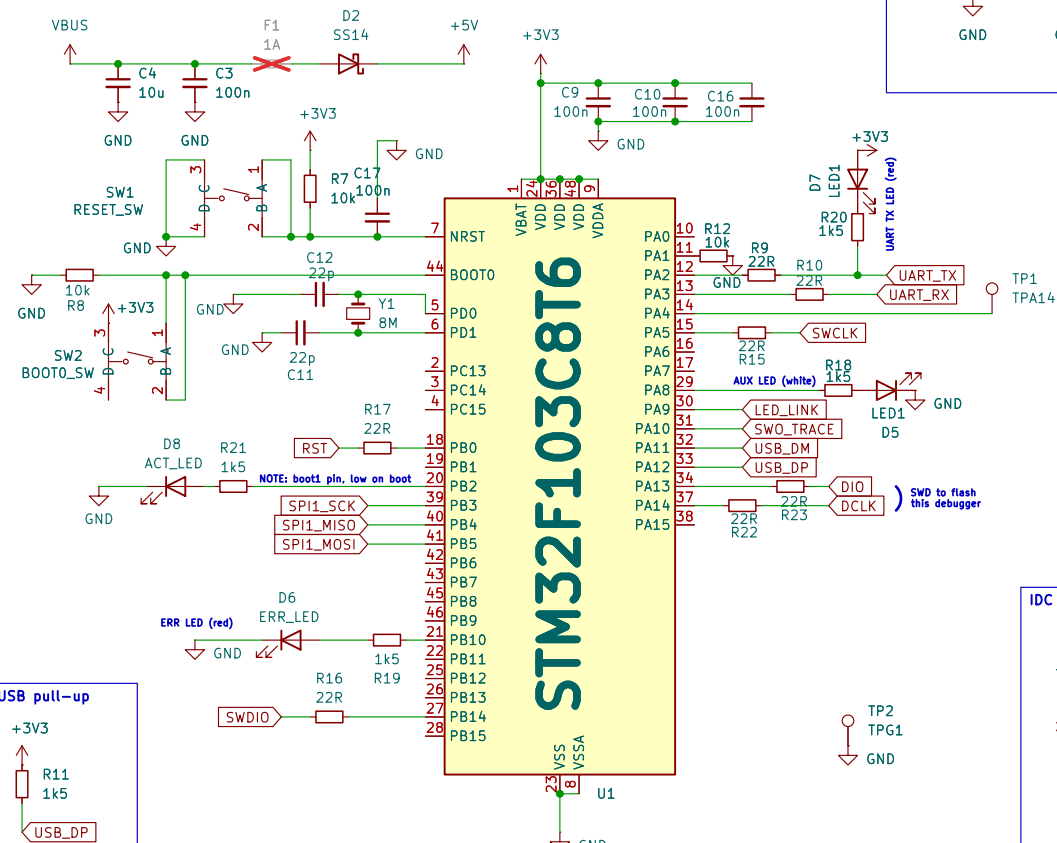


3V3 regulator

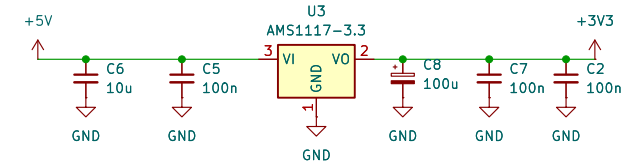

LEDs

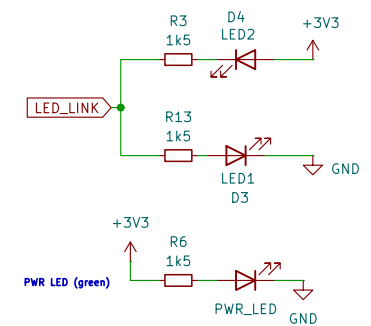

IDC connector

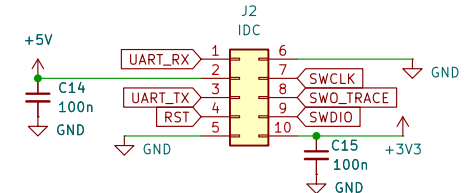

HZBUGGER rev.A by OH3HZB

A debugger compatible with the BlackMagic Probe firmware

Sheet: /

File: hzbugger.kicad_sch

Title: HZBUGGER

Size: A4

Date: 2026-07-03

KiCad E.D.A. 10.0.6

Rev: A

Id: 1/1