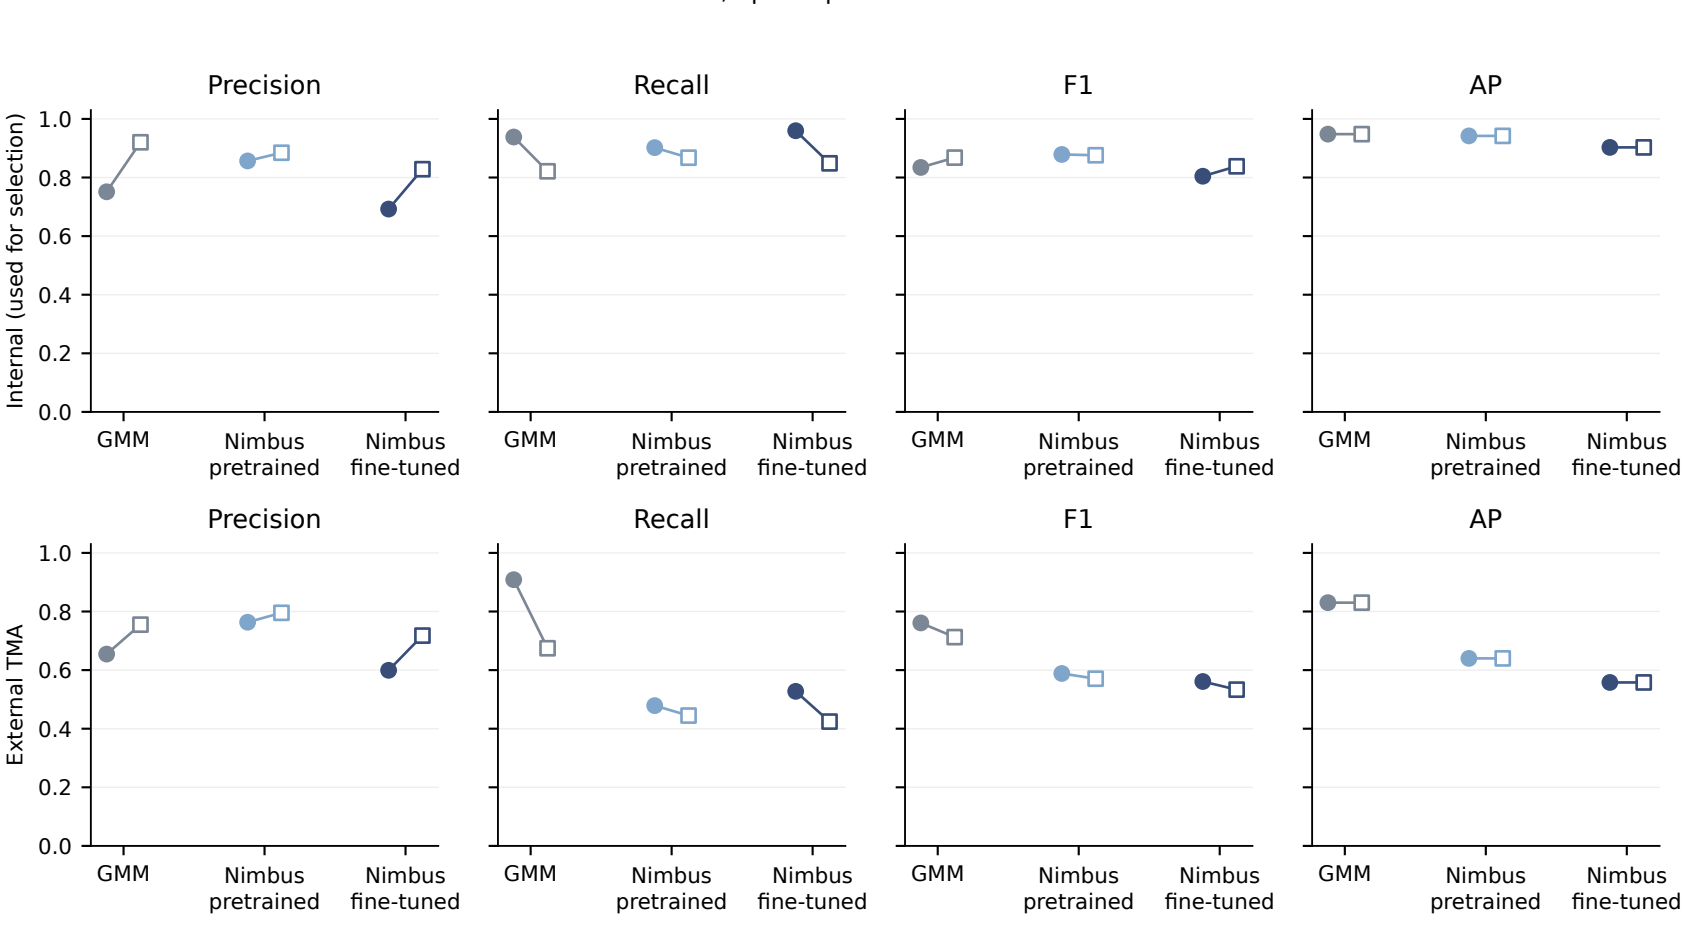
Filled circle: default 0.5; open square: validation-selected threshold
Precision
Recall
F1
AP
Internal (used for selection)
External TMA
1.0
0.8
0.6
0.4
0.2
0.0
GMM
Nimbus pretrained
Nimbus fine-tuned