Project #1: User Program (1)

[CSE4070]

Instructor

Prof. Youngjae Kim

Teaching Assistants

Junhyeok Park, Sungjin Byeon (01)

Junghyun Ryu, Seoyeong Lee (02)

Fall 2024



Contents

1. Prerequisites

- Background
- How User Program Works
- Code Level Flow
- Virtual Memory
- System Calls

2. Requirements

- Process Termination Messages
- Argument Passing
- System Calls

3. Suggested Order of Implementation

- 4. Evaluation
- 5. Documentation
- 6. Submission



Prerequisites

- Pintos is a simple OS which can boot, execute an application, and power off.
- Run 'echo' application on Pintos first. (Run 'make' in src/examples and src/userprog first)

~/pintos/src/userprog \$ pintos --filesys-size=2 -p ../examples/echo -a echo -- -f -q run 'echo x'

Do not miss to type "--" (two hyphens!).

```
Formatting file system...done.
Boot complete.
Extracting ustar archive from scratch device into file system...
Putting 'echo' into the file system...
Erasing ustar archive...
Executing 'echo x':
Execution of 'echo x' complete.
Timer: 76 ticks
Thread: 0 idle ticks, 76 kernel ticks, 0 user ticks
hda2 (filesys): 26 reads, 172 writes
hda3 (scratch): 83 reads, 2 writes
Console: 818 characters output
Keyboard: 0 keys pressed
Exception: 0 page faults
Powering off...
```





- Pintos is a simple OS which can boot, execute an application, and power off.
- Run 'echo' application on Pintos first. (Run 'make' in src/examples and src/userprog first)

~/pintos/src/userprog \$ pintos --filesys-size=2 -p ../examples/echo -a echo -- -f -q run 'echo x'

Do not miss to type "--" (two hyphens!).

```
Formatting file system...done.
Boot complete.
Extracting ustar archive from scratch device into file system...
Putting 'echo' into the file system...
Erasing ustar archive...
Executing 'echo x':
                                                                     We can not see the result of 'echo x'
Execution of 'echo x' complete.
                                                                     because of lack of implementation.
Timer: 76 ticks
Thread: 0 idle ticks, 76 kernel ticks, 0 user ticks
hda2 (filesys): 26 reads, 172 writes
hda3 (scratch): 83 reads, 2 writes
                                                                                                     echo x
Console: 818 characters output
Keyboard: 0 keys pressed
Exception: 0 page faults
                                                                         We should be able to see 'x'.
Powering off...
```



- Why can't we see the result of 'echo' command?
- It is because, in current Pintos, system call, system call handler, argument passing, and user stack have not been implemented.
- Basically, current Pintos does not implement many OS functionalities, including those above.



- In this project, students will have to make the Pintos be able to execute user programs properly.
- Students should work in the following directories and modify the following files:


	Files to be modified	Referenced files
src/ userprog	process.h / process.c syscall.h// syscall.c	pagedir.h / pagedir.c exception.h / exception.c
src/ threads	thread.h / thread.c	synch.h / synch.c vaddr.h
src/ devices	-	shutdown.h / shutdown.c input.h / input.c
src/ lib	syscall-nr.h user/syscall.h user/syscall.c	-



How User Program Works

Procedure:

- 1. Pintos can load and run regular ELF(Executable & Linkable Format) executables.
- To run a user program, we must copy (put) the user program to the simulated file system disk.

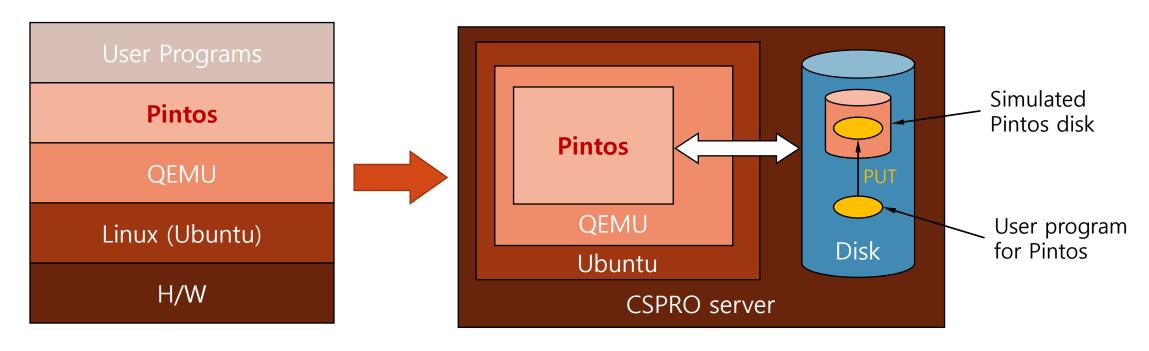



How User Program Works

Consider the previous example more in detail

```
~/pintos/src/userprog $ pintos --filesys-size=2 -p ../examples/echo -a echo -- -f -q run 'echo x'
"--filesys-size=2": Make simulated Pintos disk which consists of 2MB
"-p ../examples/echo -a echo": Copy '../examples/echo' into the simulated disk and
change the name from '../examples/echo' to 'echo'
"--" between echo and -f: Separate pintos' options and kernel arguments
"-f": Pintos formats the simulated disk.
"-q": Pintos will be terminated after execution of 'echo'.
"run 'echo x'": Pintos will execute 'echo' with argument 'x'.
```



How User Program Works

Consider the previous example more in detail

~/pintos/src/userprog \$ pintos --filesys-size=2 -p ../examples/echo -a echo -- -f -q run 'echo x'


- ✓ 'echo' is the application that writes arguments to the standard output.
- ✓ Thus, 'echo' needs the I/O functionality provided by system call in the kernel.
- ✓ And, it also needs user stack implementation which stores arguments and passes them to kernel.
- ✓ But, Pintos has no implementation for system calls and user stacks.


That's why we were not able to see the result of 'echo x'.



Code Level Flow


\$ pintos --filesys-size=2 -p ../examples/echo -a echo -- -f -q run 'echo x'

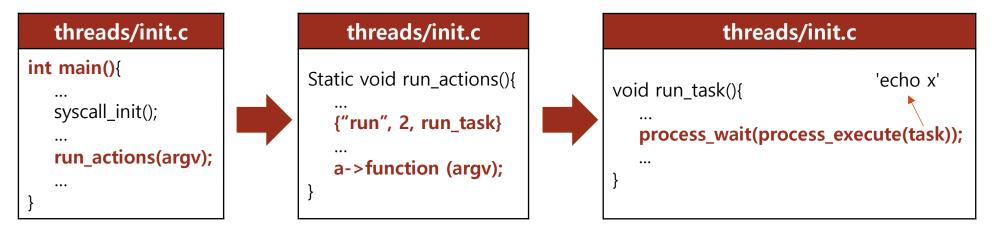

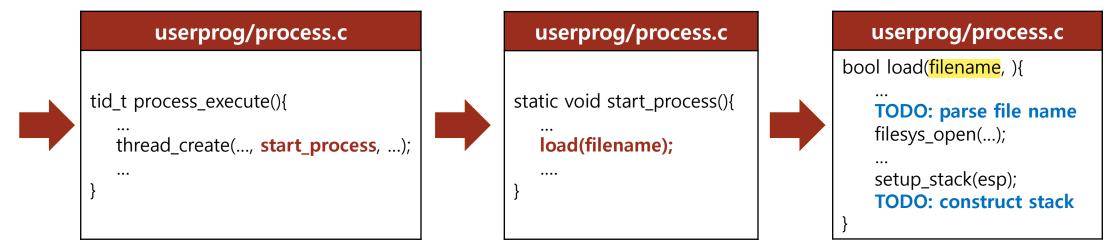




Code Level Flow

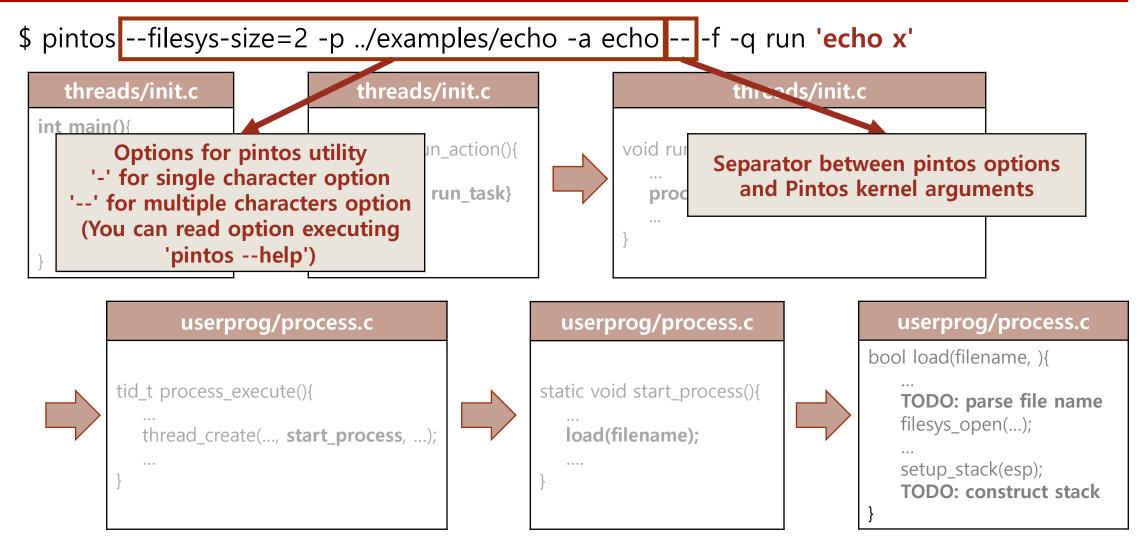

Code Level Flow

\$ pintos --filesys-size=2 -p ../examples/echo -a echo -- -f -q run 'echo x'

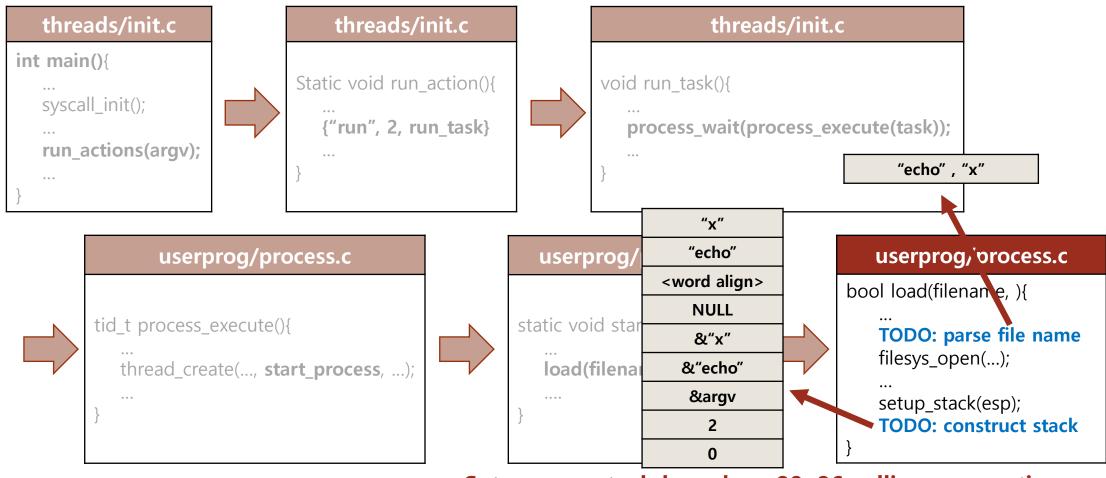


Setup user stack based on 80x86 calling convention 13



Virtual Memory

- Pintos divides memory into two region, user memory and kernel memory.
- If we use these memory areas directly, it's hard to manage memory.
- For example,
 - 1 each process can damage each other.
 - 2 the process can corrupt kernel code that is critical to running the operating system.

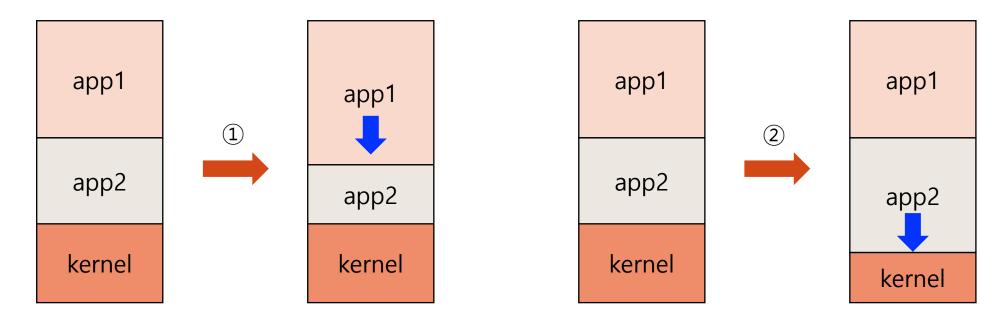

Virtual Memory


- To prevent these problems, operating systems adopt virtual memory system.
- Because of virtual memory, each process can have its own memory area and use it as if the process occupies the whole memory.
- Pintos also manages memory regions by virtual memory.

Virtual memory is also divided into two regions: user virtual memory and kernel virtual memory.




Virtual Memory: Launch Application

Physical Memory

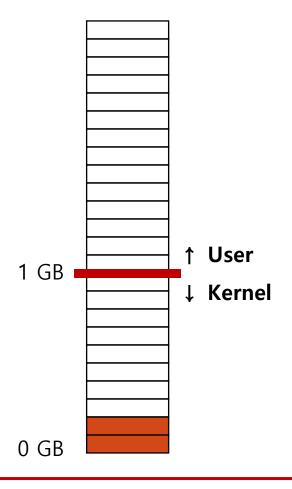




Virtual Memory: Launch Application

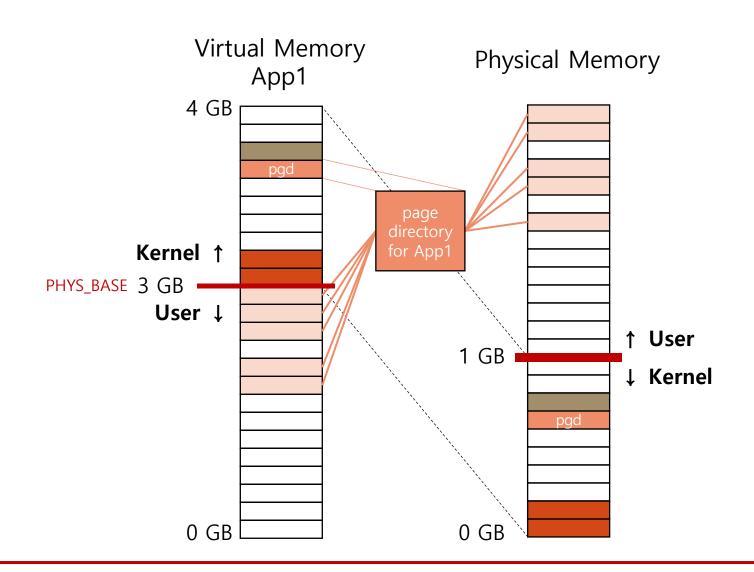

Kernel virtual memory is global.



Virtual Memory: Launch Application

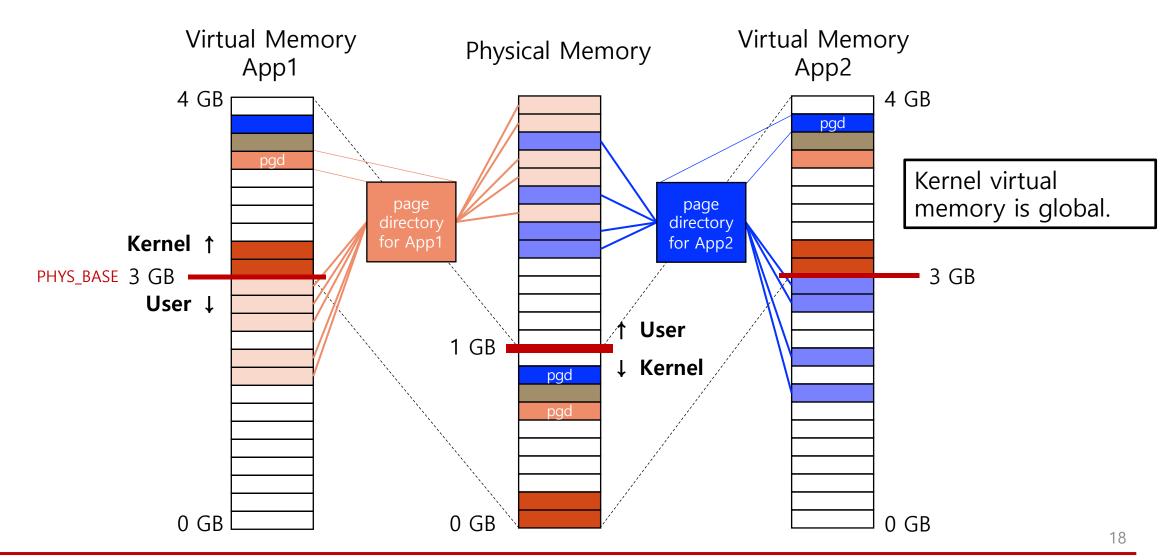

Virtual Memory in Pintos

1. Each process has its own user virtual memory.

2. Pintos allocates 1 GB to kernel as global memory. (PHYS_BASE (3 GB) ~ 4 GB in virtual memory)

3. Memory unit is a page in Pintos, which is size of 4 KB.

 User program can access physical memory by translating virtual address via page directory and page table.
 (Refer to A.7 'Page Table')



Virtual Memory


Functions for page

```
1) threads/vaddr.h
    ✓ is user vaddr(), is kernel vaddr()
         Check that given virtual address is user/kernel virtual address
    ✓ ptov(), vtop()
         Translate physical address to kernel virtual address and vice versa
2) threads/palloc.c
    ✓ palloc_get_page()
         Get page from user/kernel memory pool
3) userprog/pagedir.c
    ✓ pagedir_create()
         Create page directory
    ✓ pagedir_get_page()
         Look up the physical address that corresponds to user virtual address in page directory
    ✓ pagedir_set_page()
         Add mapping in page directory from user virtual address to the physical page
```

- As we've seen, Pintos divides memory into user virtual memory and kernel virtual memory to protect each process and kernel code.
- Along with the concept of virtual memory, OS prevents user program from accessing the kernel memory which contains core functionalities.
- Then, how user program uses kernel's functionality?
- OS provides system calls to solve this problem.



- For safety, operating system provides two types of mode, user and kernel mode.
- When user program is run in user mode, it can not access memory or disk.
- These operations are performed in **kernel mode**.
- OS provides system calls to enter kernel mode.

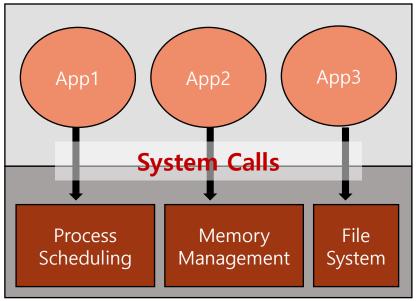


User Memory Area

Kernel Memory Area



• Pintos provides user level interface of system calls in 'lib/user/syscall.c' and skeleton of system call handler in 'userprog/syscall.c'.

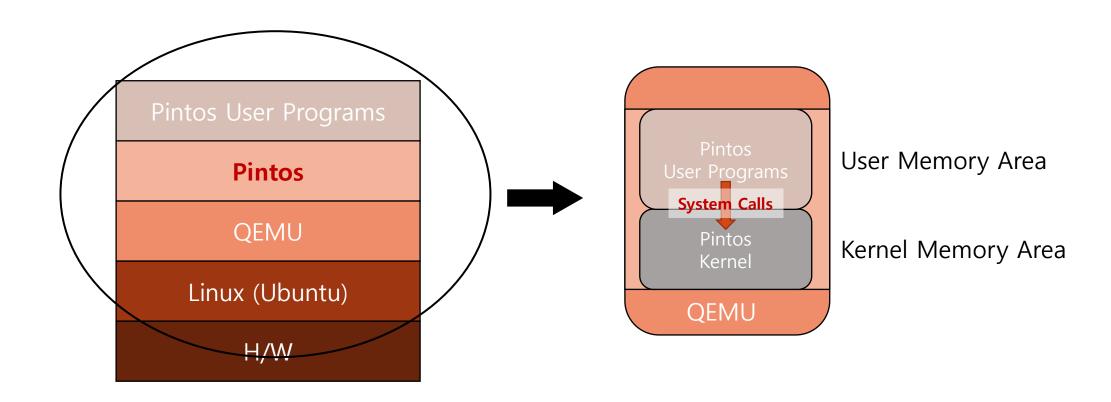

- Procedure of system call in Pintos
 - > User programs call system call function.


```
Prints files specified on command line to the console. */
5 #include <stdio.h>
6 #include <syscall.h>
8 int
9 main (int argc, char *argv[])
   bool success = true;
   int i;
   for (i = 1; i < argc; i++)
       int fd = open (argv[i]);
                                                                   open() system call
       if (fd < 0)
           printf ("%s: open failed\n", argv[i]);
           success = false;
           continue;
```



- Procedure of system call in Pintos
 - > System call number and additional arguments are pushed on caller's stack.
 - ➤ Invoke interrupt for system call by using 'int \$0x30' instruction

```
102 int
103 open (const char *file)
104 {
105  return syscall1 (SYS_OPEN, file);
106 }
```

After returning from system call handler, restore stack pointer.

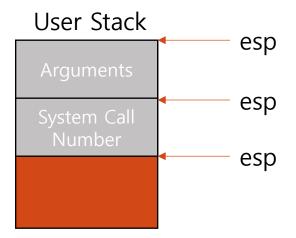



25

- Procedure of system call in Pintos
 - > Set the stack for interrupt and call interrupt handler

```
18 .func intr_entry
19 intr_entry:
      /* Save caller's registers. */
      pushl %ds
      pushl %es
      pushl %fs
      pushl %gs
      pushal
      /* Set up kernel environment. */
                  /* String instructions go upward. */
      cld
                             /* Initialize segment registers. */
      mov $SEL_KDSEG, %eax
      mov %eax, %ds
      mov %eax, %es
      leal 56(%esp), %ebp /* Set up frame pointer. */
      /* Call interrupt handler. */
      pushl %esp
36 .globl intr_handler
                                                                          Call interrupt handler
      call intr_handler
      addl $4, %esp
   .endfunc
```



- Procedure of system call in Pintos
 - intr_handler() calls system call hander.

```
344 void
345 intr_handler (struct intr_frame *frame)
346 {
     bool external;
     intr_handler_func *handler;
     /* External interrupts are special.
        We only handle one at a time (so interrupts must be off)
        and they need to be acknowledged on the PIC (see below)
        An external interrupt handler cannot sleep. */
     external = frame->vec_no >= 0x20 && frame->vec_no < 0x30;
     if (external)
         ASSERT (intr_get_level () == INTR_OFF);
         ASSERT (!intr_context ());
         in_external_intr = true;
         yield_on_return = false;
     /* Invoke the interrupt's handler. */
     handler = intr_handlers[frame->vec_no];
     if (handler != NULL)
       handler (frame):
```

Interrupt handler for **system call** handler has already been registered while Pintos was booting.*

- X Refer to the following function calls:
- 1) main() in 'threads/init.c' calls syscall_init() which is in 'userprog/syscall.c'
- 2) **syscall_init()** calls **intr_register_int()** in 'threads/interrupt.c'



^{*} source code: threads/interrupt.c

- Procedure of system call in Pintos
 - > syscall_handler() gets control, and it can access the stack via 'esp' member of the struct intr_frame (in threads/interrupt.h).
 - > 80x86 convention stores return value of system call in EAX register so that we can store the return value in 'eax' member of the struct intr_frame.

```
15 static void
16 syscall_handler (struct intr_frame *f UNUSED)
17 {
18   printf ("system call!\n");
19   thread_exit ();
20 }
```

Pintos provides skeleton of system call handler.
We will develop this in this project!

```
Arguments
System Call
Number
esp
```

```
20 struct intr_frame
      /* Pushed by intr_entry in intr-stubs.S.
23
          These are the interrupted task's saved registers. */
      uint32_t ebx;
                                   /* Saved EBX. */
      uint32_t edx;
                                   /* Saved EDX. */
      uint32_t ecx:
                                   /* Saved ECX. */
      uint32_t eax;
                                   /* Saved EAX. */
      void *esp;
                                   /* Saved stack pointer. */
      uint16_t ss, :16;
                                   /* Data segment for esp. */
```



^{*} source code: userprog/syscall.c

Requirements

When user program is terminated, kernel prints termination messages.
 Output form is as follows:

Process Name: exit(exit status)₩n

```
# -*- perl -*-
use strict;
use warnings;
use tests::tests;
check_expected ([<<'EOF']);
(exec-once) begin
(child-simple) run
child-simple: exit(81)
(exec-once) end
exec-once: exit(0)

EOF</pre>

Refer to the following functions
threads/thread.c: thread_exit()
userprog/process.c: process_exit()

check_expected ([<<'EOF']);
(exec-once) begin
child-simple: exit(81)

fexec-once: exit(0)

EOF</pre>
```

• Refer to Pintos manual 3.3.2

<tests/userprog/exec-once.ck>



- How can we get a process name?
 - Refer to struct thread

```
struct thread
{
   /* Owned by thread.c. */
   tid_t tid;
   enum thread_status status;
   char name[16];
```



- How is user program terminated?
 - When ELF user program runs, _start() in lib/user/entry.c is called at first.

```
void
_start (int argc, char *argv[])
{
  exit (main (argc, argv));
}
```

- After executing the program, exit() system call is called.
- Pintos only provides exit() system call API, but the exit() system call API has not yet been implemented.



- How is the user program terminated?
 - Flow of function calls exit() in lib/user/syscall.c
 - -> syscall1 (SYS_EXIT, status) in lib/user/syscall.c
 - -> syscall_handler() in userprog/syscall.c
 - -> thread_exit() in threads/thread.c
 - -> process_exit() in userprog/process.c

Refer to slide pg. 25-29




Argument Passing

User program can have multiple arguments.

```
/bin/ls(-1)foo bar
-rw-r--r-- 1 root root 0 Sep 11 02:59 bar
            root root 0 Sep 11 02:58 foo
```

- 2. Parse the arguments and allocate it to memory according to 80x86 calling convention
 - Refer to the next slides and Pintos manual 3.5
- Assume that the length of arguments is less than 4 KB
 - Test programs use less than 128 Bytes as arguments.

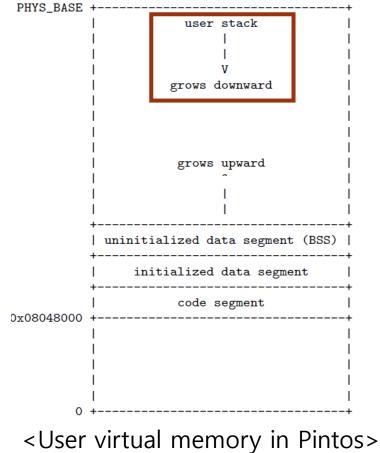



Argument Passing

• "/bin/ls -I foo bar" will be parsed into "/bin/ls", "-I", "foo", "bar"

Argument Passing

• "/bin/ls -I foo bar" will be parsed into "/bin/ls", "-I", "foo", "bar"

```
Address
                                              Name
                                                             Data
                                                                          Type
0xC0000000 (PHYS BASE)
                                 0xbffffffc
                                              argv[3][...]
                                                             'bar\0'
                                                                         char[4]
0x00000004
                                              argv[2][...]
                                                           'foo\0'
                                                                         char[4]
                                 0xbffffff8
                                              argv[1][...]
                                                           '-1\0'
                                                                         char[3]
                                 0xbffffff5
0xBFFFFFC
                                 0xbfffffed/
                                              argy [0] [...]
                                                             '/bin/ls\0' char[8]
                                              word-align
                                 0xbfffffec
                                                                         uint8_t
                                              argv[4]
                                 0xbfffffe8
                                                                          char *
                                              argv[3]
                                                                         char *
                                 0xbfffffe4
                                                             0xbffffffc
                                 0xbfffffe0
                                              argv[2]
                                                             0xbffffff8
                                                                         char *
                                 0xbfffffdc
                                              argv[1]
                                                             0xbffffff5
                                                                         char *
                                              argv[0]
                                 0xbfffffd8
                                                             0xbfffffed
                                                                         char *
                                                                         char **
                                 0xbfffffd4
                                                             0xbfffffd8
                                              argv
                                 0xbfffffd0
                                              argc
                                                                          int
                                              return address
                                                                         void (*) ()
                                 0xbfffffcc
```

- You can start implementation of argument passing after the following function.
 - ✓ userprog/process.c : static bool setup_stack(void **esp)
 - ✓ Refer to 'Code Level Flow' in the previous chapter




- "/bin/ls -I foo bar" will be parsed into "/bin/ls", "-I", "foo", "bar"
 - ✓ Push arguments at the top of the stack

Name	Data	$_{\mathrm{Type}}$
argv[3][]	'bar\0'	char[4]
argv[2][]	'foo\0'	char[4]
argv[1][]	'-1\0'	char[3]
argv[0][]	$'$ /bin/ls\0 $'$	char[8]
word-align	0	uint8_t
argv[4]	0	char *
argv[3]	0xbffffffc	char *
argv[2]	0xbffffff8	char *
argv[1]	0xbffffff5	char *
argv[0]	0xbfffffed	char *
argv	0xbfffffd8	char **
argc	4	int
return address	0	void (*) ()
	argv[3][] argv[2][] argv[1][] argv[0][] word-align argv[4] argv[3] argv[2] argv[1] argv[0] argv[0] argv	argv[3][] 'bar\0' argv[2][] 'foo\0' argv[1][] '-1\0' argv[0][] '/bin/ls\0' word-align 0 argv[4] 0 argv[3] 0xbffffffc argv[2] 0xbffffff8 argv[1] 0xbffffff8 argv[0] 0xbfffff64 argv 0xbfffff68 argv 0xbfffff68




- "/bin/ls -I foo bar" will be parsed into "/bin/ls", "-I", "foo", "bar"
 - ✓ Push address of each argument

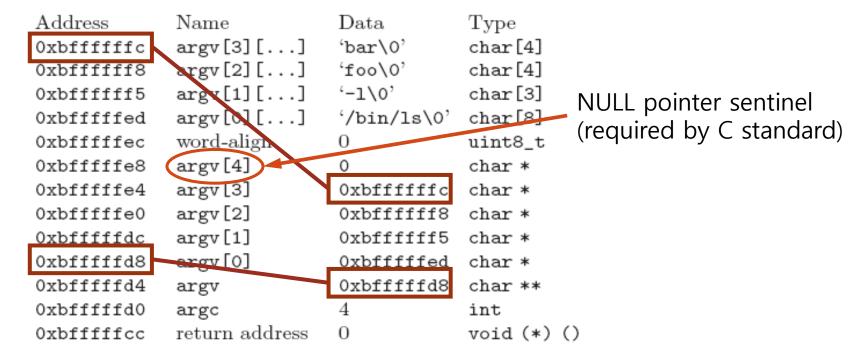



- "/bin/ls -I foo bar" will be parsed into "/bin/ls", "-I", "foo", "bar"
 - ✓ result of hex_dump(): This function is very useful for debug (in src/lib/stdio.c).

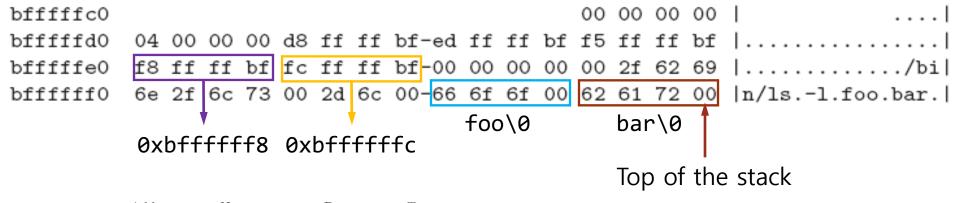

```
Address
             Name
                            Data
                                         Туре
0xbffffffc
             argv[3][...]
                                         char[4]
                            'bar\0
             argv[2][...]
0xbffffff8
                            'foo\0'
                                         char[4]
             argv[1][...]
                            '-1\0'
                                         char[3]
0xbffffff5
0xbfffffed
             argv[0][...]
                            '/bin/ls\0'
                                         char[8]
             word-align
0xbfffffec
                                         uint8_t
             argv[4]
0xbfffffe8
                                         char *
0xbfffffe4
             argv[3]
                            0xbffffffc
                                         char *
0xbfffffe0
             argv[2]
                            0xbffffff8
                                         char *
             argv[1]
0xbfffffdc
                                         char *
0xbfffffd8
             argv[0]
                            0xbfffffed
                                         char *
0xbfffffd4
                            0xbfffffd8
                                        char **
             argv
                                         int
0xbfffffd0
             argc
0xbfffffcc
             return address
                                         void (*) ()
```



- In userprog/process.c, there is setup_stack() which allocates a minimal stack page (4KB).
- Since the given code only allocates stack page, we need to make up the stack after setup_stack().
- Make up the stack referring to "3.5 80x86 Calling Convention" in Pintos manual

```
/* Set up stack. */
if (!setup_stack (esp))
goto done;

/* Start address. */
**eip = (void (*) (void)) ehdr.e_entry;
Write codes here!
```



System Calls

- Students will have to implement the following system calls (Requirements of each system call are described in Pintos manual 3.3.4.)
 - halt, exit, exec, wait, read, write
 (※ Pintos exec is different from UNIX exec)
 - Two new system calls (fibonacci, max_of_four_int)
 - read and write are special case in this project.
- 2. System calls related with file system don't need to implement in this project.
 - create, remove, open, filesize, read, write, seek, tell, close
 - But, read and write should perform standard input/output at least.



System Calls: General System Calls

- halt()
 - 1) Terminate Pintos by calling shutdown_power_off()
- exit()
 - 1) Terminate the current user program, returning status to the kernel

System Calls: General System Calls

- exec()
 - 1) Create child process
 - 2) Refer to **process_execute()** in userprog/process.c
- wait()
 - 1) What wait() system call should do is wait child process until it finishes its work.
 - 2) Check that child thread ID is valid
 - 3) Get the exit status from child thread when the child thread is dead
 - 4) To prevent termination of process before return from wait(), you can use busy waiting technique* or thread_yield() in threads/thread.c.



System Calls: General System Calls

- write() and read()
 - Not full implementation, but at least read from STDIN, write to STDOUT.
 - 1) File Descriptor of STDIN, STDOUT

```
✓ STDIN = 0, STDOUT = 1
```

- 2) Use the following function to implement read(0)
 - ✓ pintos/src/devices/input.c: uint8_t input_getc(void)
- 3) Use the following function to implement write(1)
 - ✓ pintos/src/lib/kernel/console.c: void **putbuf**(...)



- Start from main() in threads/init.c
- run_actions (argv); will be invoked.

```
/* Run actions specifications (argv);
/* Finish up. */
shutdown ();
thread_exit ();
```



- Focus on {"run", 2, run_task}
- a->function (argv); invokes run_task().

```
static void
run_actions (char **argv)
  /* An action. */
  struct action
      char *name;
      int argc:
      void (*function) (char **argv);
    };
  /* Table of supported actions. */
  static const struct action actions[] =
      {"run", 2, run_task),
#ifdef FILESYS
      {"ls", 1, fsutil_ls},
```

```
while (*argv != NULL)
    const struct action *a;
    int i;
    /* Find action name. */
    for (a = actions; ; a++)
      if (a->name == NULL)
        PANIC ("unknown action '%s' (use
      else if (!strcmp (*argv, a->name))
        break:
    /* Check for required arguments. */
    for (i = 1; i < a->argc; i++)
      if (argv[i] == NULL)
        PANIC ("action `%s' requires %d a
    /* Invoke action and advance. */
    a->function (argv);
    argv += a->argc;
```



run_task() invokes process_execute().

```
/* Runs the task specified in ARGV[1]. */
static void
run_task (char **argv)
  const char *task = argv[1];
  printf ("Executing '%s':\n", task); ←
#ifdef USERPROG
  process_wait (process_execute (task));
#else
  run_test (task);
#endif
  printf ("Execution of '%s' complete.\n", task);
```

What does 'task' contain?

Does it contain only file name?

Refer to printf statement

strtok_r() in lib/string.c will help you.



- thread_create() will enroll user program name.
- And, it also enrolls function, start_process(), which will launch user program.

```
tid_t
process_execute (const char *file_name)
  char *fn_copy;
  tid_t tid:
  /* Make a copy of FILE_NAME.
     Otherwise there's a race between the caller and load(). */
  fn_copy = palloc_get_page (0);
  if (fn_copy == NULL)
    return TID_ERROR;
  strlcpy (fn_copy, file_name, PGSIZE);
  /* Create a new thread to execute FILE_NAME. */
  tid = thread_create (file_name, PRI_DEFAULT, start_process, fn_copy);
  if (tid == TID_ERROR)
    palloc_free_page (fn_copy);
  return tid;
```



• When process scheduling is invoked, the child process (user program) will be executed by wrapper function of **_start()** in lib/user/entry.c.

```
void
_start (int argc, char *argv[])
{
  exit (main (argc, argv));
}
```



- When ELF executable (user program) is finished, exit() system call is called.
- After exit() system call, it returns to process_wait().



Parent process which ran process_execute() should be waiting in process_wait() until the child process is finished.

```
/* Runs the task specified in ARGV[1]. */
static void
run_task (char **argv)
  const char *task = argv[1];
  printf ("Executing '%s':\n", task);
#ifdef USERPROG
  process_wait (process_execute (task));
#else
  run_test (task);
#endif
  printf ("Execution of '%s' complete.\n", task);
```



System Calls: Source Codes

- 1. lib/user/syscall.h and lib/user/syscall.c
 - APIs for system calls are already given in Pintos code.
 - You don't have to add something for system call APIs.
- 2. userprog/syscall.h
 - There is only one prototype syscall_init() which registers system call interrupts when Pintos was booted.
 - You can write prototype of system calls in this file.
- 3. userprog/syscall.c
 - You must make syscall_handler() handle system calls.
 - If you have done argument passing, you can get system call number from intr_frame *f.
 - esp member of intr_frame *f points to system call number.
 (You can refer to lib/syscall-nr.h to check each system call number)
 - And then you can use switch statement to classify system calls.
 (What really these system calls do would be written here.)



- Implement new system calls into Pintos
 - 1. int fibonacci(int n)
 - ✓ Return N th value of Fibonacci sequence
 - int max_of_four_int(int a, int b, int c, int d)
 - ✓ Return the maximum of a, b, c and d
 - **X** Use 'fibonacci' and 'max_of_four_int' as the name of new system calls.

Don't use other name to implement new system calls above.



Write user level program which uses new system calls

- 1. Make additional.c in pintos/src/examples
- 2. Write simple example by using new system calls
- 3. Name of execution file should be 'additional'
- 4. Usage : ./additional [num 1] [num 2] [num 3] [num 4]
 - Function: Print the result of 'fibonacci' system call using [num 1] as parameter
 - Print the result of 'max_of_four_int' system call using [num 1, 2, 3, 4] as parameter

Example : \$./additional 10 20 62 40

55 62

5. Run the following command to check your program works properly.

pintos/src/userprog\$ pintos --filesys-size=2 -p ../examples/additional -a additional -- -f -q run 'additional 10 20 62 40'

'additional' should be run on Pintos, not CSPRO server.



- 1. How to identify system call number?
 - ✓ Refer to 'lib/syscall-nr.h'
- 2. How to return system call's result?
 - √ Check argument 'struct intr_frame' of syscall_handler() in syscall.c
 - ✓ Refer to <u>'System Calls'</u> in Prerequisites



• To compile newly added user program, "additional", you need to modify **Makefile** in **src/examples**.

• Refer to how other user programs are written in Makefile



Additional System Calls: Source Codes

- 1. lib/user/syscall.h
 - Write prototype of 2 new system call APIs
- 2. lib/user/syscall.c
 - Define new syscall4() function for max_of_four_int() (lib/user/syscall.c)
 - Define fibonacci() and max_of_four_int() system calls APIs
- 3. lib/syscall-nr.h
 - Add system call numbers for 2 new system calls
- 4. userprog/syscall.h
 - Write prototype of 2 new system calls
- 5. userprog/syscall.c
 - Define **fibonacci()** and **max_of_four_int()** system calls
 - What really these system calls do would be written here.




Accessing User Memory

- 1. User program can pass an invalid pointer.
 - NULL pointer such as open (NULL); in tests/userprog/open-null.c
 - Unmapped virtual memory
 - Pointer to kernel address space
- 2. Invalid pointers must be rejected without harm to kernel or other running process.
- 3. It can be implemented in 2 ways:
 - 1) Verify the validity of a user-provided pointer, then dereference it.
 - 2) Check only that a user pointer points below PHYS_BASE, then dereference it.

 If the pointer is invalid, it will cause a "page fault". You can handle it by modifying the code page_fault() in 'userprog/exception.c'
- 4. Refer to Pintos manual 3.1.5



Accessing User Memory

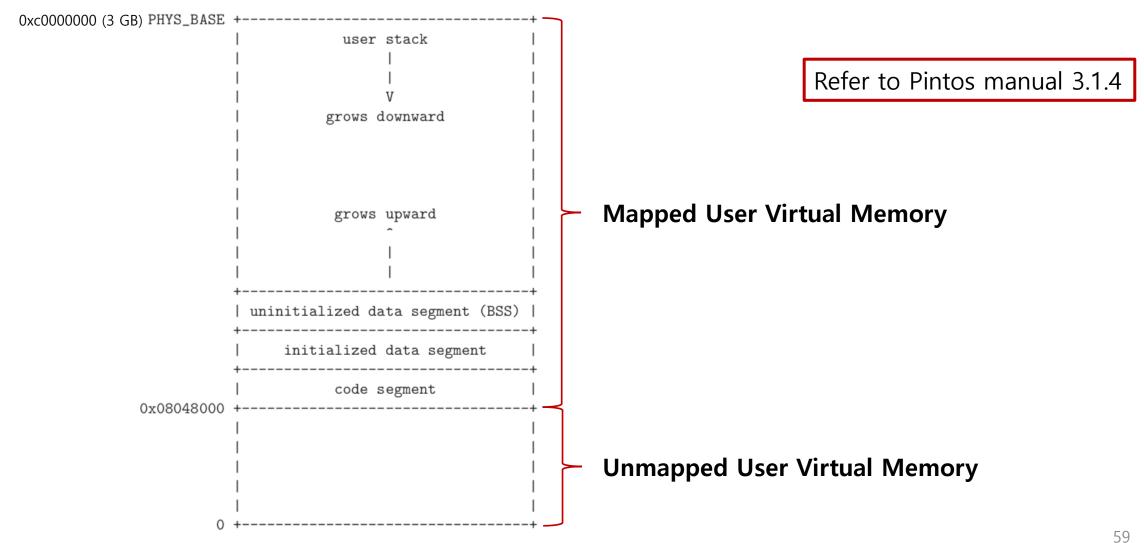

Accessing User Memory

• To verify the validity of a user-provided pointer, you can use functions in userprog/pagedir.c and threads/vaddr.h.

Check Unmapped virtual memory using pagedir_get_page()

Check pointer to kernel address space using is_user_vaddr() and is_kernel_vaddr()

• Use these functions to verify the validity of given pointer

- You can not see the result until you implement core functionalities.
- Students are highly encouraged to read/understand these slides and Pintos manual first, design the structures and then start to implement.
- 1) Argument Passing: After implementing it, check the result using hex_dump().
- 2) User Memory Access: Protect user memory accesses from system calls.
- 3) System Call Handler: Implement syscall_handler() to handle system call.
- 4) System Call Implementation: Implement exec(), exit(), write(), read() first, and then others.
- **5)** Additional Implementation: Implement fibonacci(), max_of_four_int().
- X Refer to source codes in src/tests/userprog



- You can not see the result until you implement core functionalities.
- Students are highly encouraged to read/understand these slides and Pintos manual first, design the structures and then start to implement.
- 1) Argument Passing: After implementing it, check the result using hex_dump()
- 2) User Memory Access: Make a plan for protecting user memory accesses from system calls
- 3) System Call Handler: Implement syscall_handler() to handle system call
- 4) System Call Implementation: Implement exec(), exit(), write(), read() first
- 5) Additional Implementation: Imple

Refer to Code Level Flow

src/userprog/process.c : load()

Check parameters of load()

If you want to check the dump values before implementing process_wait(), insert infinite loop in process_wait() to block process

(You should finish to implement process_wait() later)



- You can not see the result until you implement core functionalities.
- Students are highly encouraged to read/understand these slides and Pintos manual first, design the structures and then start to implement.
- 1) Argument Passing: After implementing it, check the result using hex_dump()
- 2) User Memory Access: Make a plan for protecting user memory accesses from system calls
- 3) System Call Handler: Implement syscall_handler() to handle system call
- 4) System Call Implementation: Implement exec(), exit(), write(), read() first
- 5) Additional Implementation: Implement fibonacci(), max_of_four_int()
- ※ Refer to source codes in src/tests/userprog

Refer to src/threads/vaddr.h

Recommend to implement the function which checks the validity of given address



- You can not see the result until you implement core functionalities.
- Students are highly encouraged to read/understand these slides and Pintos manual first, design the structures and then start to implement.
- 1) Argument Passing: After implementing it, check the result using hex_dump()
- 2) User Memory Access: Make a plan for protecting user memory accesses from system calls
- 3) System Call Handler: Implement syscall_handler() to handle system call
- 4) System Call Implementation: Implement exec(), exit(), write(), read() first
- 5) Additional Implementation: Implement fibonacci(), max_of_four_int()

src/userprog/syscall.c : syscall_handler()

Check argument 'struct intr_frame' of syscall_handler() in syscall.c (struct intr_frame is in src/threads/interrupt.h)



- You can not see the result until you implement core functionalities.
- Students are highly encouraged to read/understand these slides and Pintos manual first, design the structures and then start to implement.
- 1) Argument Passing: After implementing it, check the result using hex_dump()
- 2) User Memory Access: Make a plan for protecting user memory accesses from system calls
- 3) System Call Handler: Implement syscall_handler() to handle system call
- 4) System Call Implementation: Implement exec(), exit(), write(), read() first
- 5) Additional Implementation: Implement fibonacci(), max_of_four_int()
- ※ Refer to source codes in src/tests/userprog

Synchronization will be needed
(You can use busy waiting)
exit status is -1 when syscall_handler is terminated in abnormal way



- You can not see the result until you implement core functionalities.
- Students are highly encouraged to read/understand these slides and Pintos manual first, design the structures and then start to implement.
- 1) Argument Passing: After implementing it, check the result using hex_dump()
- 2) User Memory Access: Make a plan for protecting user memory accesses from system calls
- 3) System Call Handler: Implement syscall_handler() to handle system call
- 4) System Call Implementation: Implement exec(), exit(), write(), read() first
- 5) Additional Implementation: Implement fibonacci(), max_of_four_int()
- ※ Refer to source codes in src/tests/userp

Modify the followings: src/lib/syscall-nr.h src/lib/syscall.h src/lib/syscall.c



- 1. 21 of 76 tests in this project will be graded. (Refer to the test case list in the next slide)
- Total score is 100 which consists of 80 for test cases and 20 for documentation.
- 3. Additional 2.5 points for each additional system call implementation. (5 points for **fibonacci()** and **max_of_four_int()** in implementation) ** It will be calculated in development part (80%), so the total point will be 4 points (5*80%).
- Grading script (make grade or make check in src/userprog) provided by Pinots will be used.
- 5. Refer to 'grade' and 'results' files in src/userprog/build after grading ('grade' file is only created when you use make grade)

- 6. Test cases are classified in functionality test and robustness test.
- 7. Refer to the followings for checking each test case's point based on the test type
 - pintos/src/tests/userprog/Rubric.functionality
 - pintos/src/tests/userprog/Rubric.robustness
 - Functionality and robustness gets 50% of total score respectively.
 - **■** We do not follow the score ratio of test types shown in pintos/src/tests/userprog/Grading

Evaluation: Test Cases (21 tests)

Functionality		
No.	Name	Point
1	args-none	3
2	args-single	3
3	args-multiple	3
4	args-many	3
5	args-dbl-space	3
6	exec-once	5
7	exec-multiple	5
8	exec-arg	5
9	wait-simple	5
10	wait-twice	5
11	multi-recurse	15
12	exit	5
13	halt	3
	Total	63

Robustness			
No.	Name	Point	
1	exec-bad-ptr	3	
2	exec-missing	5	
3	sc-bad-arg	3	
4	sc-bad-sp	3	
5	sc-boundary	5	
6	sc-boundary-2	5	
7	wait-bad-pid	5	
8	wait-killed	5	
	Total	34	

- If you see src/tests/userprog/Grading, functionality test set takes 35% and robustness test set takes 25% of total score.
- But we do not follow this.
- Each type of test set takes 50% respectively.
- Thus, total score is

$$\left(\frac{\text{Functionality points}}{63} \times 50 + \frac{\text{Robustness points}}{34} \times 50\right) / 100 \times 80$$

Remaining 20 is for documentation

Documentation

- Use the document file uploaded on e-class
- Documentation accounts for 20% of total score. (Development 80%, Documentation 20%)



• We provide the script 'submit.sh' to make tar.gz file which contains 'src' directory and document file.

학생들의 편의를 위해 pintos 디렉토리 내 submit.sh 스크립트를 제공합니다.

이 스크립트는 src 디렉토리와 document file을 포함한 tar.gz 파일을 생성합니다.

- This is an individual project.
- Due date: 2024. 10. 3 23:59
- Submission
 - The form of submission file is as follows:

Name of compressed file	Example (ID: 20189999)
os_prj1_[ID].tar.gz	os_prj1_20189999.tar.gz

- No hardcopy.
- Copy will get a penalty (1st time: 0 Point and downgrading, 2nd time: F grade)



Contents

- ① Pintos source codes (Only 'src' directory in pintos directory) 최소한의 용량을 위해 src 디렉토리만 압축파일에 포함합니다.
- ② Document: [ID].docx (e.g. 20189999.docx; Other format is not allowed such as .hwp)

How to submit

- 1) Make tar.gz file.
 - Copy the document file ([ID].docx) to pintos directory.
 - Execute submit.sh script in the pintos directory and follow the instructions of the script pintos 디렉토리 내의 submit.sh 스크립트를 실행하고 스크립트의 지시를 따르십시오.
 - Check that os_prj1_[ID].tar.gz is created.
 - Decompress os_prj1_[ID].tar.gz and check the contents in it. (\$ tar -zxf os_prj1_[ID].tar.gz)
 (Only [ID].docx and src directory should be contained in the tar.gz file.)
 - For example, if your ID is 20189999, os_prj1_20189999.tar.gz should be created. To decompress the tar.gz file, execute tar -zxf os_prj1_20189999.tar.gz
 - Please check the contents of tar.gz file after creating it.
- 2) Upload the **os_prj1_[ID].tar.gz** file to e-class.

5% of point will be deducted for a wrong form and way to submit.

❖ Late submission is allowed up to 3 days (~10/6) and 10% of point will be deducted per day.



Notice – 'submit.sh'

- The 'submit.sh' script should be executed on a directory where 'src' folder is located. submit.sh 스크립트는 src 폴더가 위치한 디렉토리에서 실행되어야 합니다.
- 'ID' folder should not be in the directory. ('ID' folder will be removed after compressing process.)

해당 디렉토리에 '학번' 폴더가 없어야 합니다. (압축 과정 중 '학번' 폴더를 생성하여 필요한 파일을 넣고 압축한 뒤 '학번' 폴더를 삭제합니다.)

- 'ID.docx' file should be located in the directory.
 - Also, report file with extensions other than 'docx' will not be compressed.
 - 해당 디렉토리에 '학번.docx' 파일이 있어야 함께 압축됩니다.
 - 또한 'docx' 이외의 확장자를 가진 보고서 파일은 압축되지 않습니다.
- Be sure to backup your code in case of an unexpected situation.
 만일의 경우를 대비해 반드시 코드를 백업하여 주세요.



Disclaimer

- You must check the contents of the tar.gz file before submission.
- <u>제출하기 전, tar.gz 파일의 내용물을 반드시 다시 한 번 체크하기 바랍니다.</u>
- · Any result produced from the 'submit.sh' script is at your own risk.
- 'submit.sh' 스크립트로 생성된 결과의 모든 책임은 사용자에게 귀속됩니다.

