



N100 NAS Motherboard Mini ITX DDR5 8G 4800Mhz 12th Gen Intel 4x I226-V 2.5G Router Mainboard 2*NVMe 6*SATA 3.0 PCIe1 Type-C

Price: **USD 224.99** / piece

Ships From: brazil

Bundle: Motherboards

Seller Guarantees

Ships within 3 business days

Buyer protection 20 Days

Commit Delivery 20 Days

CN

[Visit Store](#) ▶



[View snapshot of order in English](#) | [View snapshot of order in Portuguese](#)

This is a snapshot of the product taken when the order was placed. [View current product](#)

Product Details

Item specifics

Brand Name:	SZJN
Chipset:	Intel Others
Onboard LAN:	3x RJ45
Maximum Ram Capacity:	32 GB
Processor compatibility:	AMD Others
With CPU:	Yes

Support Memory Type:	DDR5
Number of PCI:	0
Storage Interface Type:	SATA
Storage Interface Type:	M.2 (NVMe)
Package:	Yes
RAID Supported:	YES
Application:	Desktop
Application:	Laptop
Application:	Server
Application:	Workstation
Chipset Manufacturer:	Intel
Back I/O Ports:	HDMI 2.1
PCI - E standards:	PCI - E 4.0
Socket Type:	Onboard CPU
Special Function:	none
Usage Scenario:	Audio & Video
Usage Scenario:	Household
Usage Scenario:	Office
Usage Scenario:	DESIGN
Usage Scenario:	Video Production
Usage Scenario:	Industrial Computer
Usage Scenario:	Workstation
Usage Scenario:	Server
Usage Scenario:	others
Origin:	Mainland China
Number of PCIe x 8:	0

Number Of Memory Slots:	1
Ports:	none
Form Factor:	CeB
Support USB Type:	USB 2.0
Support USB Type:	USB 3.0
Number of PCIe x 4:	0
Onboard Connectors & Header:	24-pin Main Power Connector
Memory channel:	Single
Number of SATA Ports:	6
Audio Channels:	2.1
Launch Date:	2013
Max LAN Speed:	2500Mbps
Quality Certification:	none
Number of PCIe x 1:	1
Form Factor:	Mini-ITX
Supports M.2 SSD:	2280
Number of M.2:	2


Product Description

Notice


1. Must connect 24pins+4pins ATX 12V power supply at the same time to power on.
2. PCIe x1 slot share singal with M.2 NVMe slot 2, can not to be used at same time.

3. Intel i226-V is a new network card, suggest to install newest version of following systems with supportable kernel: pfSense-CE 2.7, OPNsense 23.x, pfSense Plus, OpenWrt, ESXi, Proxmox 8.x, CentOS etc. Please make clear before buying, DO NOT open dispute because of system issue.


4.The button battery on the motherboard will be removed during shipment, please bring your own CR2032 battery.

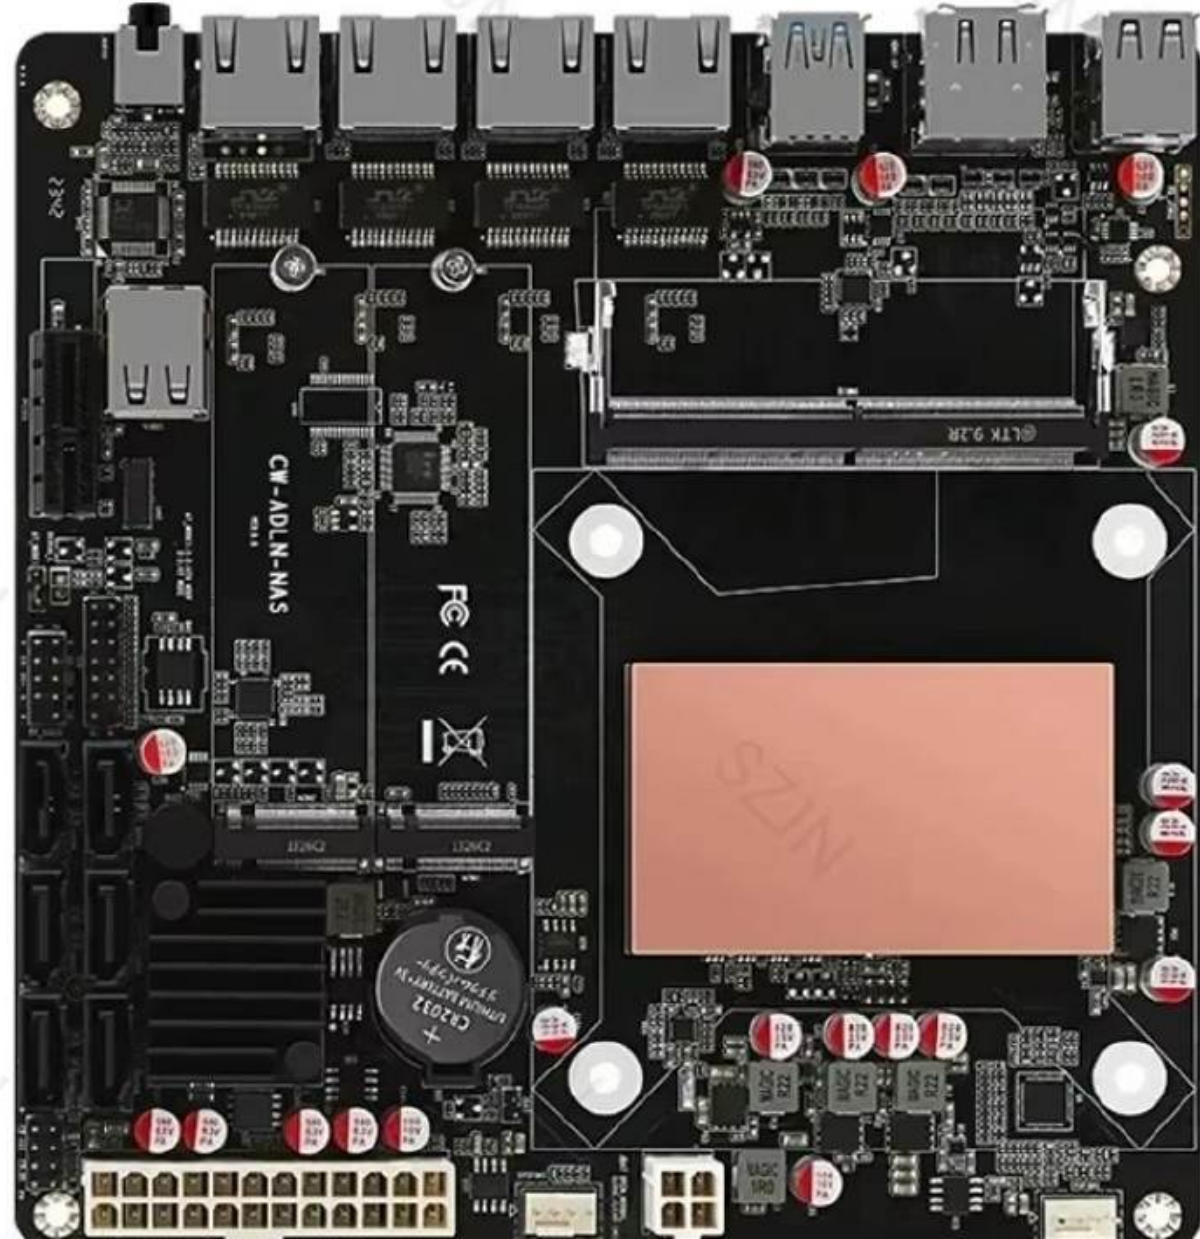

Motherboard

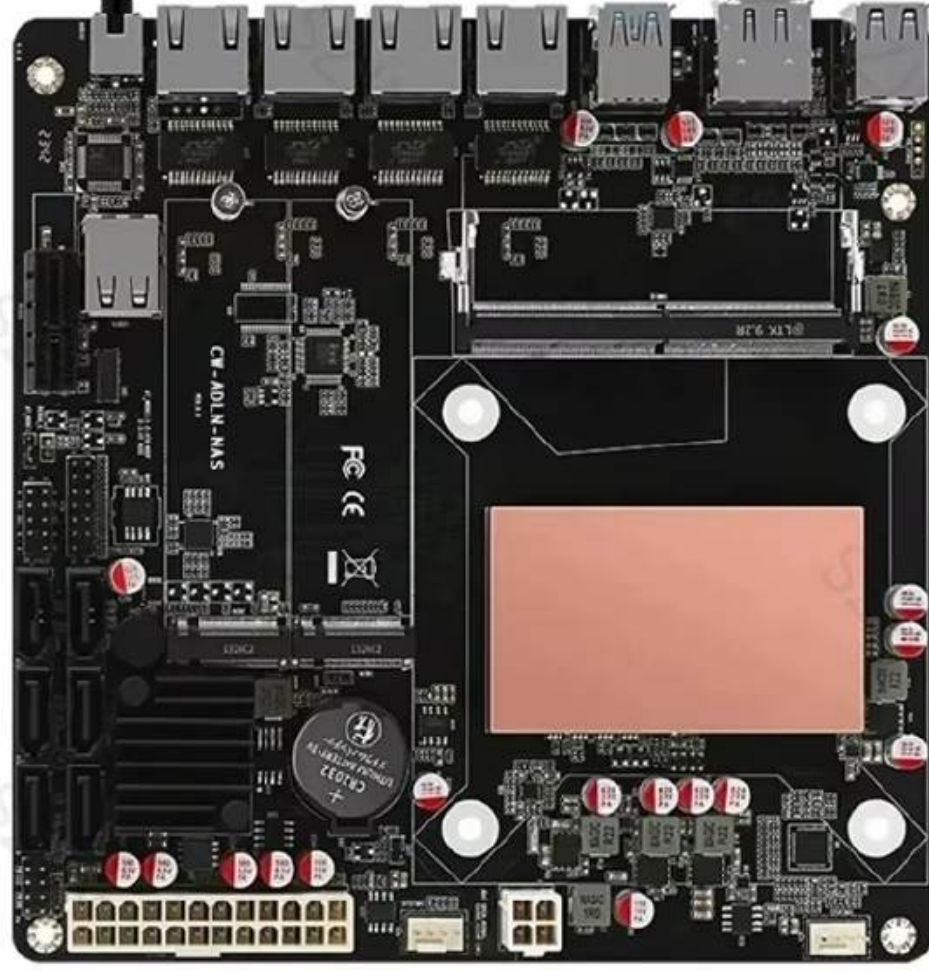


+

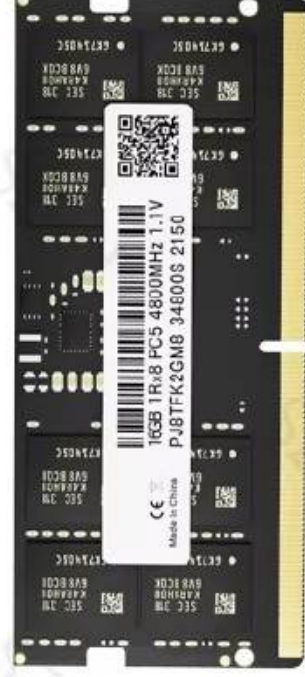

Motherboard RAM

SZJN

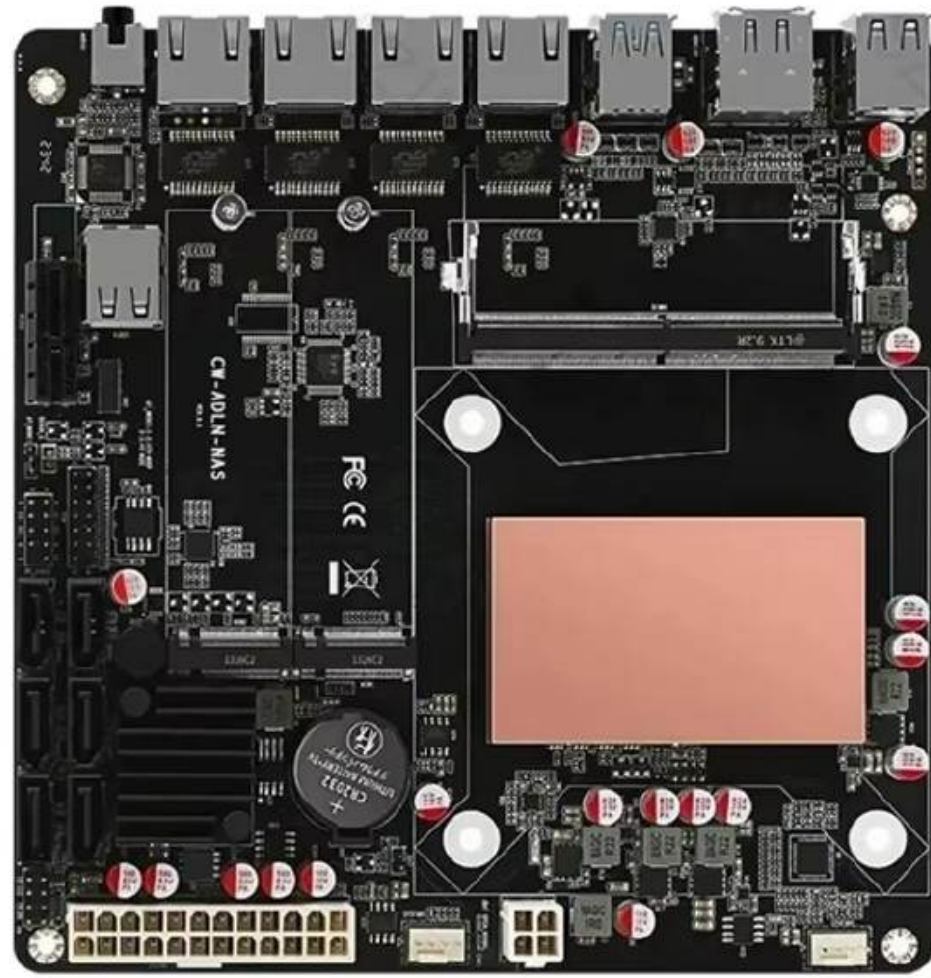

+



Motherboard Radiator

SZIN



C81H

Size: 90.5 * 90.5 * 29mm

Fan speed: 3000-5000RPM

Bearings: Double ball bearings

Fan air volume: 18-27CFM


Rated voltage: 12V DC



Fan noise: 28–50dB (A)


12th generation six-bay NAS board

Equipped with N100/N200/i3-N305 eight-core processor

2xM.2 NVMe | 6* SATA3.0 | 4 Intel 2.5G network ports | HDMI+DP 4K@60Hz

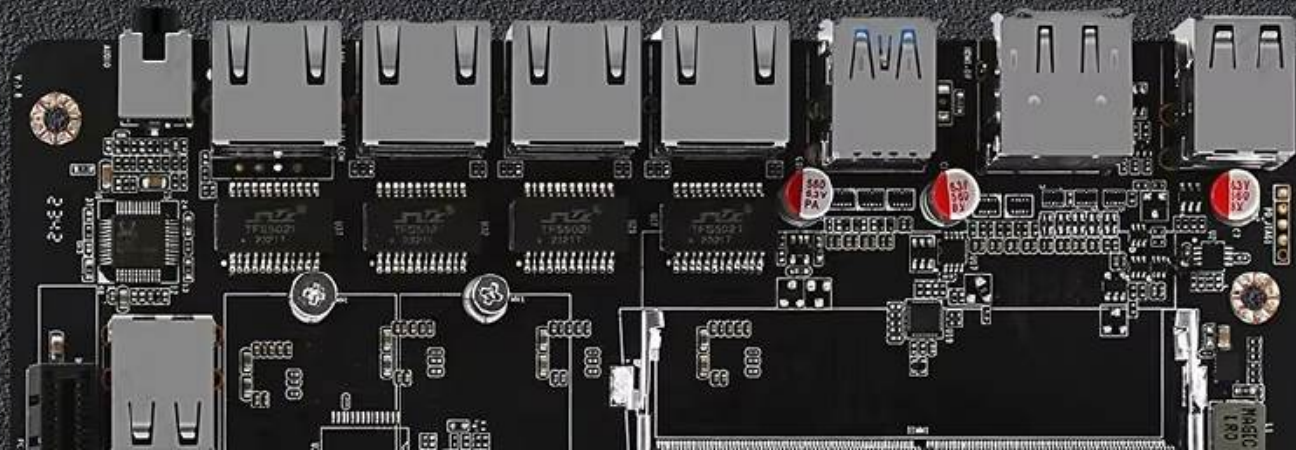



							
12TH GENERATION PROCESSOR	Intel i226-V	6*SATA3.0	DDR5 MEMORY	Type-C	HDMI2.1 INTERFACE	DPL4b interface	Dual M.2 NVMe

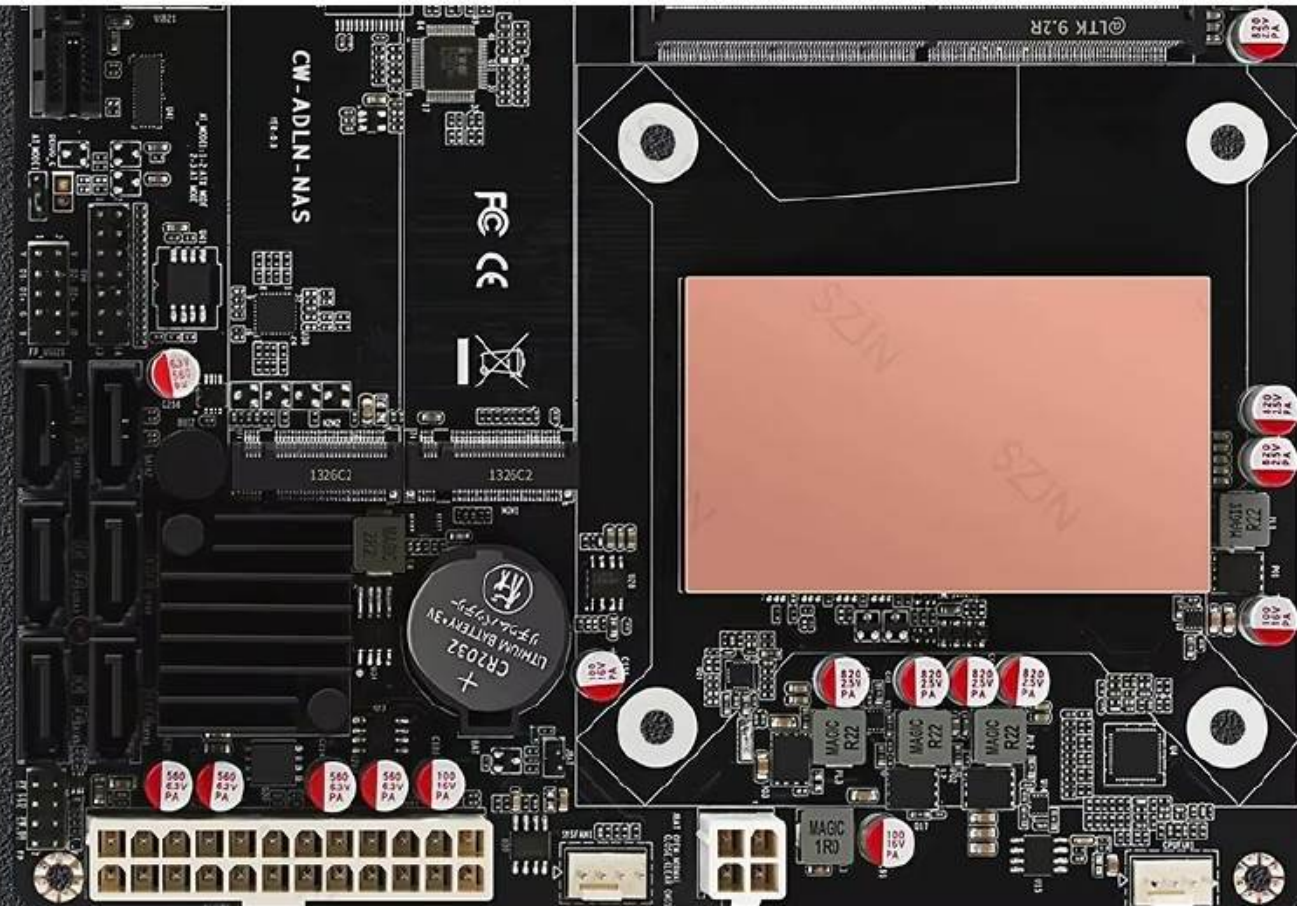

MAIN BOARD CORE FEATURES

- Intel 12th generation Alder Lake-N low-power processor
- Standard 17x17 Mini-ITX form factor compatible with market 115X series radiators
- Dual M.2 NVMe x1 signal (PCIe3.0) 2280 size
- 6 SATA3.0 onboard (JMB585 chip) 6Gbps high-speed hard disk interfaces
- 4 Intel i226-V 2.5G network card chips
- 1 SO-DIMM DDR5 4800 memory slot compatible with 5200/5600MHz
- HDMI2.1+DP1.4b supports dual display 4K@60Hz
- 1 USB3.0+2 USB2.0+1 USB-C 2.0 signal
- 1 Realtek-ALC897 2-in-1 3.5mm audio interface

➤ 1 PCIe x1 slot supports expansion cards (shares signal with the second M.2)

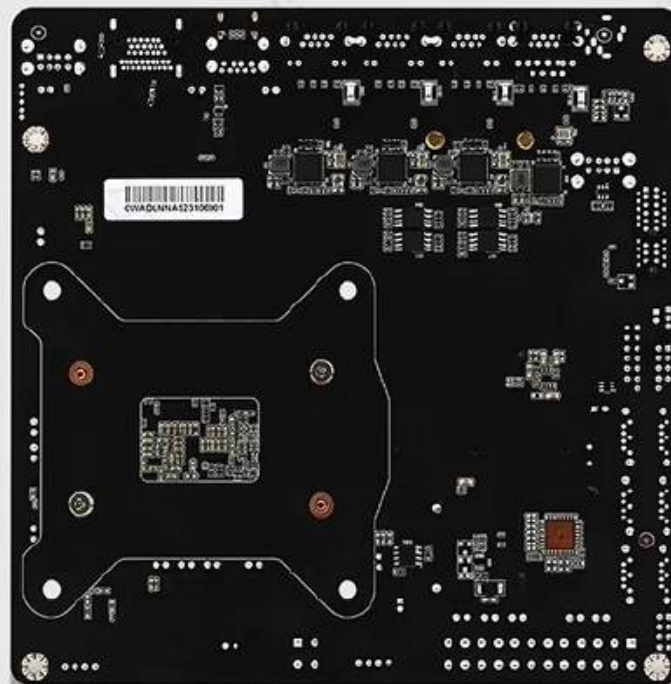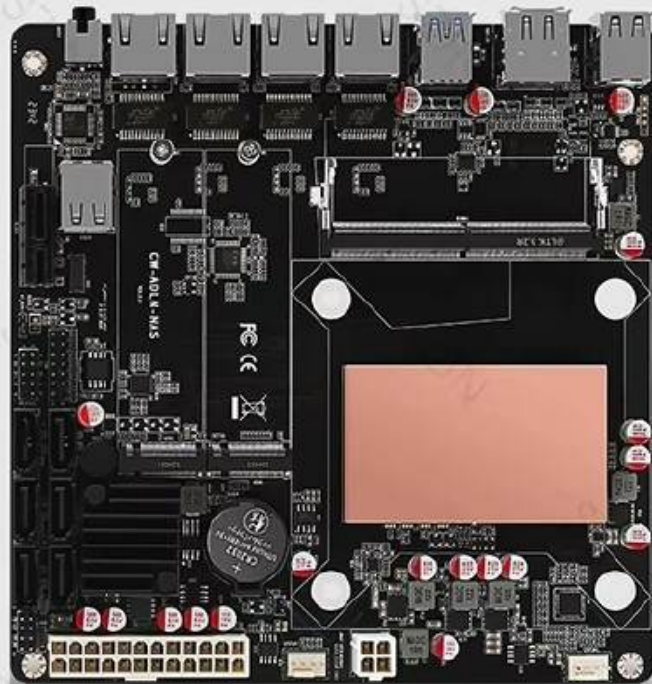

Specifications


Motherboard features	- Matte black PCB - High-density moisture-free fiber 8-layer circuit board - Full protection (supports all USB, audio sources, and network interfaces)
processor	- Intel®Alder Lake-N N95 4 (Threads: 4) 6M Cache,Up to 3.4 GHz - Intel®Alder Lake-N N100 4 (Threads: 4) 6M Cache,Up to 3.4 GHz - Intel®Alder Lake-N N200 4 (Threads: 4) 6M Cache,Up to 3.7 GHz - Intel®Alder Lake-N i3-N305 8 (Threads: 8) 6M Cache,Up to 3.8 GHz
Memory	- Support notebook DDR5 memory technology - 1*SO-DIMM DDR5 memory slot - Compatible with DDR5 4800/5200/5600MHz (non-ECC) - Maximum capacity of a single memory: 32GB
TDP	- 9-15W
storage	- 6 x SATA3.0 6Gb/s interface - SATA1 is native (2-6SATA interface is expanded by JMB585) - 2*M.2 NVMe x1 signal 1*(2280)
network	- 4*Intel i226-V 2.5G RJ45 network port


network card	- 4 * Intel i226-V 2.5G RJ45 network port
graphics card	- N95 integrated Intel® UHD graphics; 16EU - N100 integrated Intel® UHD Graphics; 24EU - N200 integrated Intel® UHD Graphics; 32EU - i3-N305 integrated Intel® UHD Graphics; 32EU - HDMI2.1 interface supports 4K@60Hz - DP1.4b interface supports 4K@60Hz
Onboard interface	- 1*FPANEL pin - 1*TPM pin (compatible with 14-pin-SPI ASUS TPM module) - 1*USB2.0 pin - 1 * CPU_FAN CPU fan 4pin socket (with temperature control) - 1 * SYS_FAN system fan 4pin socket (with temperature control) - 1*24+4 ATX power interface - 1 * USB2.0 socket (double-layer USB) - 1 * PCIe x1 slot (signal is shared with the 2nd M.2, choose one from the two)
IO panel	- 2 * USB2.0 - 1 * USB3.0 - 1*Type-C (2.0 rate) - 1 * HDMI - 1 * DP - 4*RJ45 2.5G network port - 1*AUDIO two-in-one 3.5mm audio interface
	MINI-ITX specifications: 6.7 in x 6.7 in, 17.0cm x 17.0cm

structure	- Mini-ITX specifications, 0.7 in x 0.7 in, 17.0cm x 17.0cm - All solid capacitor design
operating system	- Compatible with Microsoft@Windows 10/11 64-bit - Compatible with Linux * Only supports UEFI mode

I/O Interface Guide


IO INTERFACE GUIDE

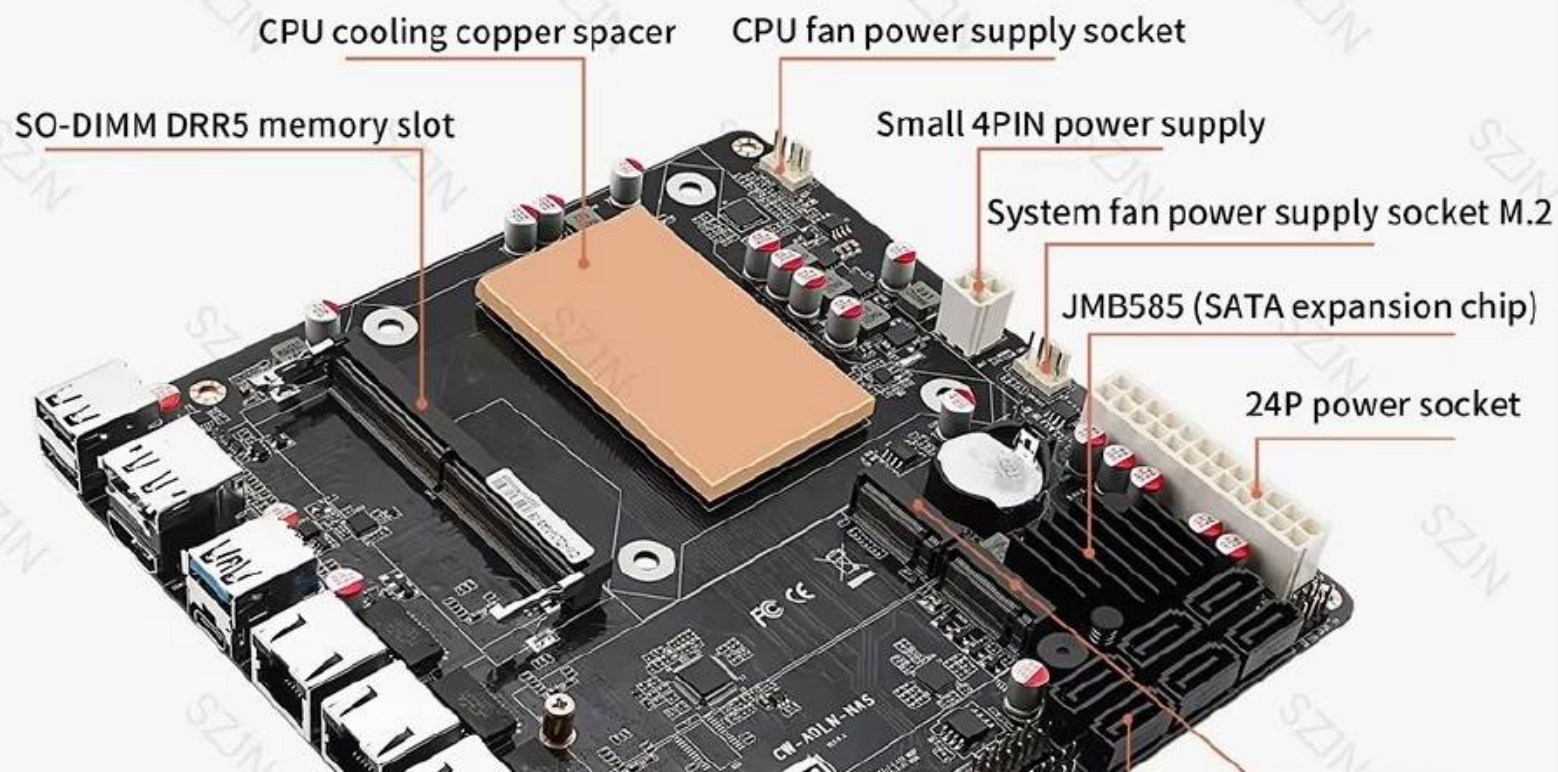

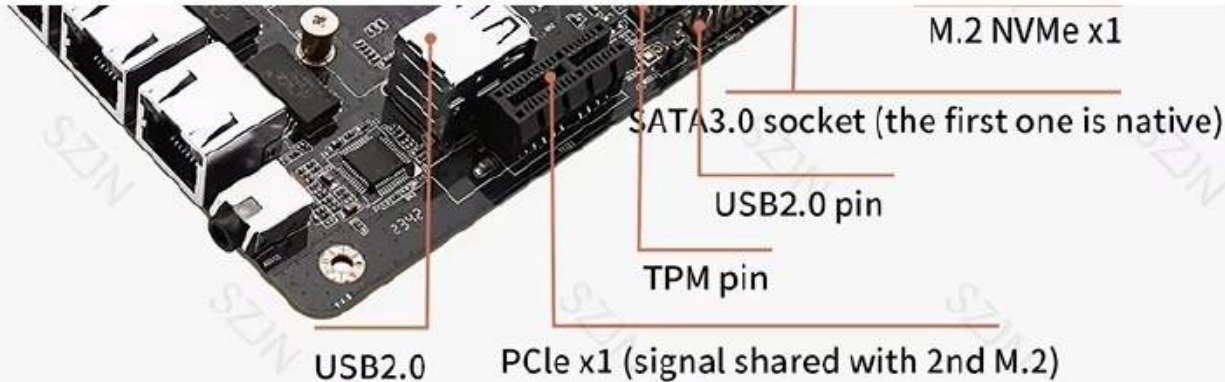

CPU Heat sink copper block


纯铜制造散热效果好，可兼容115X散热器

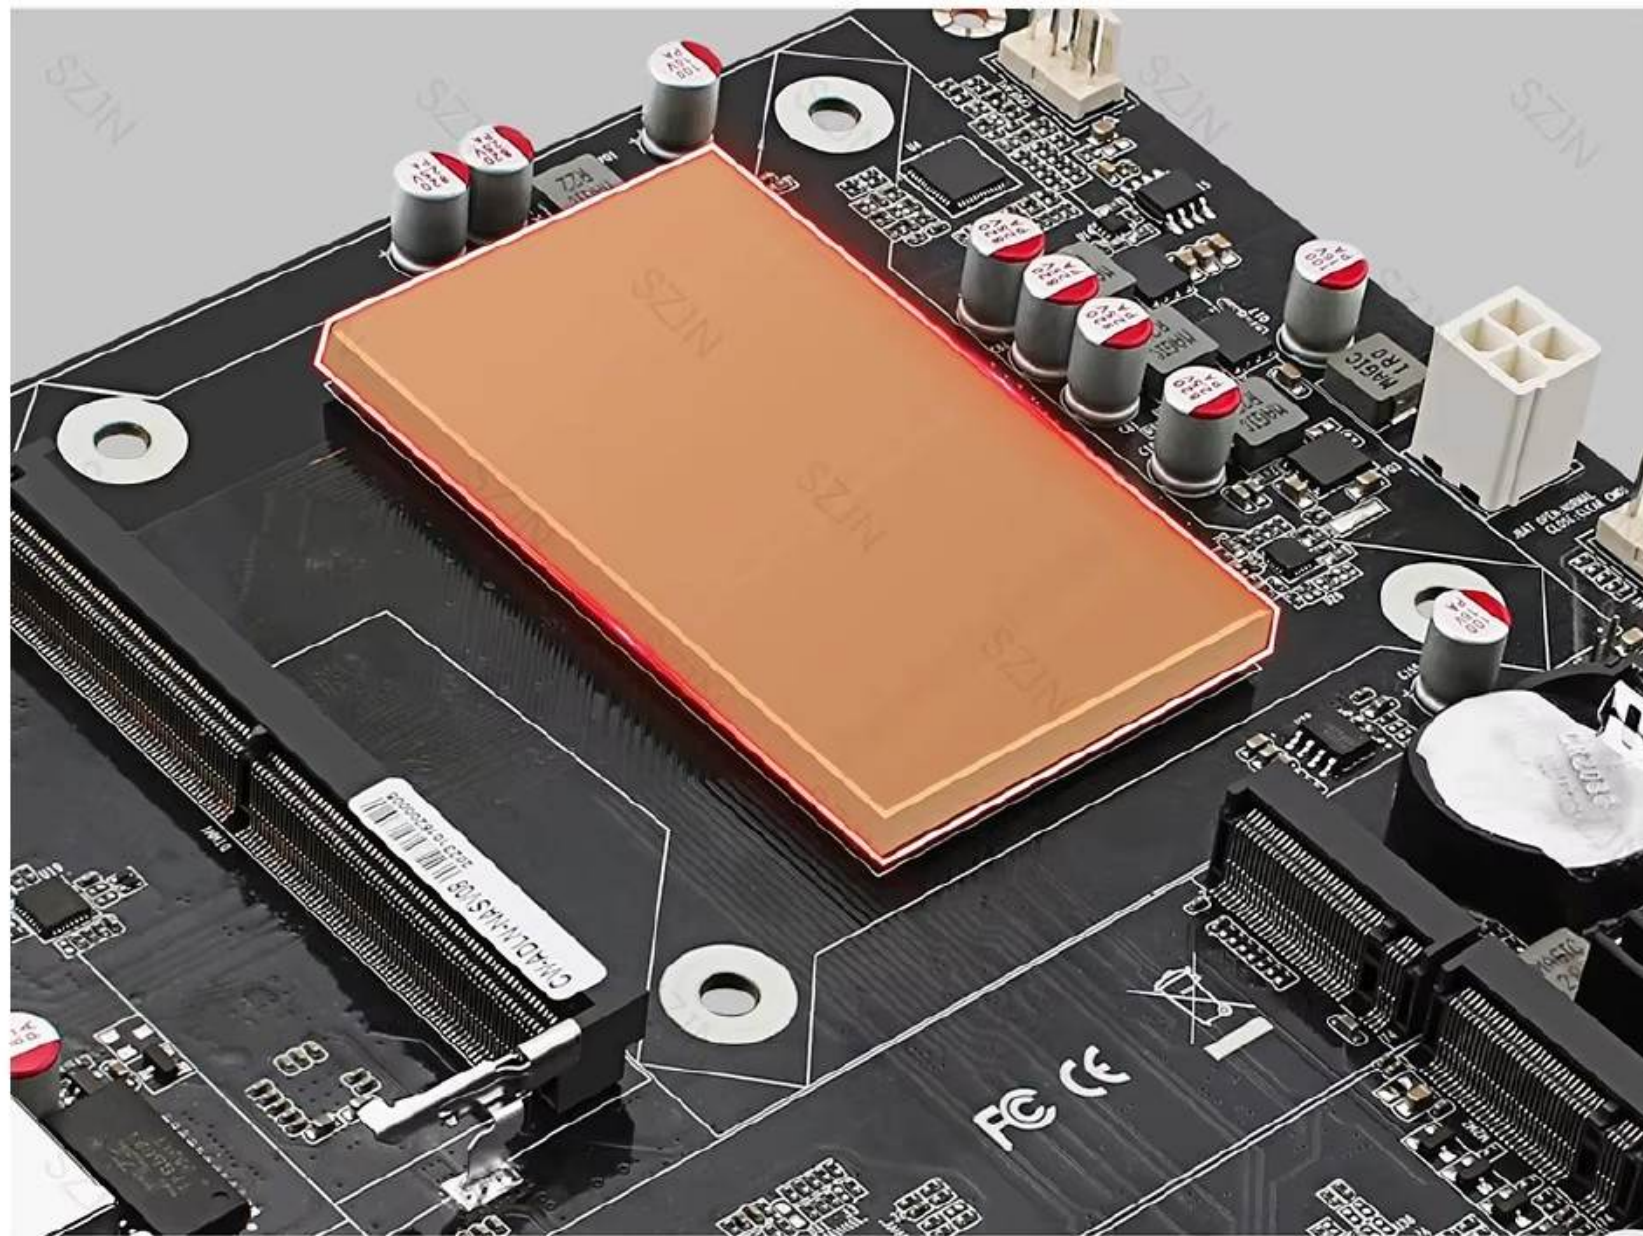

DDR5Single memory slot

It is recommended to use 4800MHz frequency (compatible with 5200/5600MHz)


Single support up to 32GB

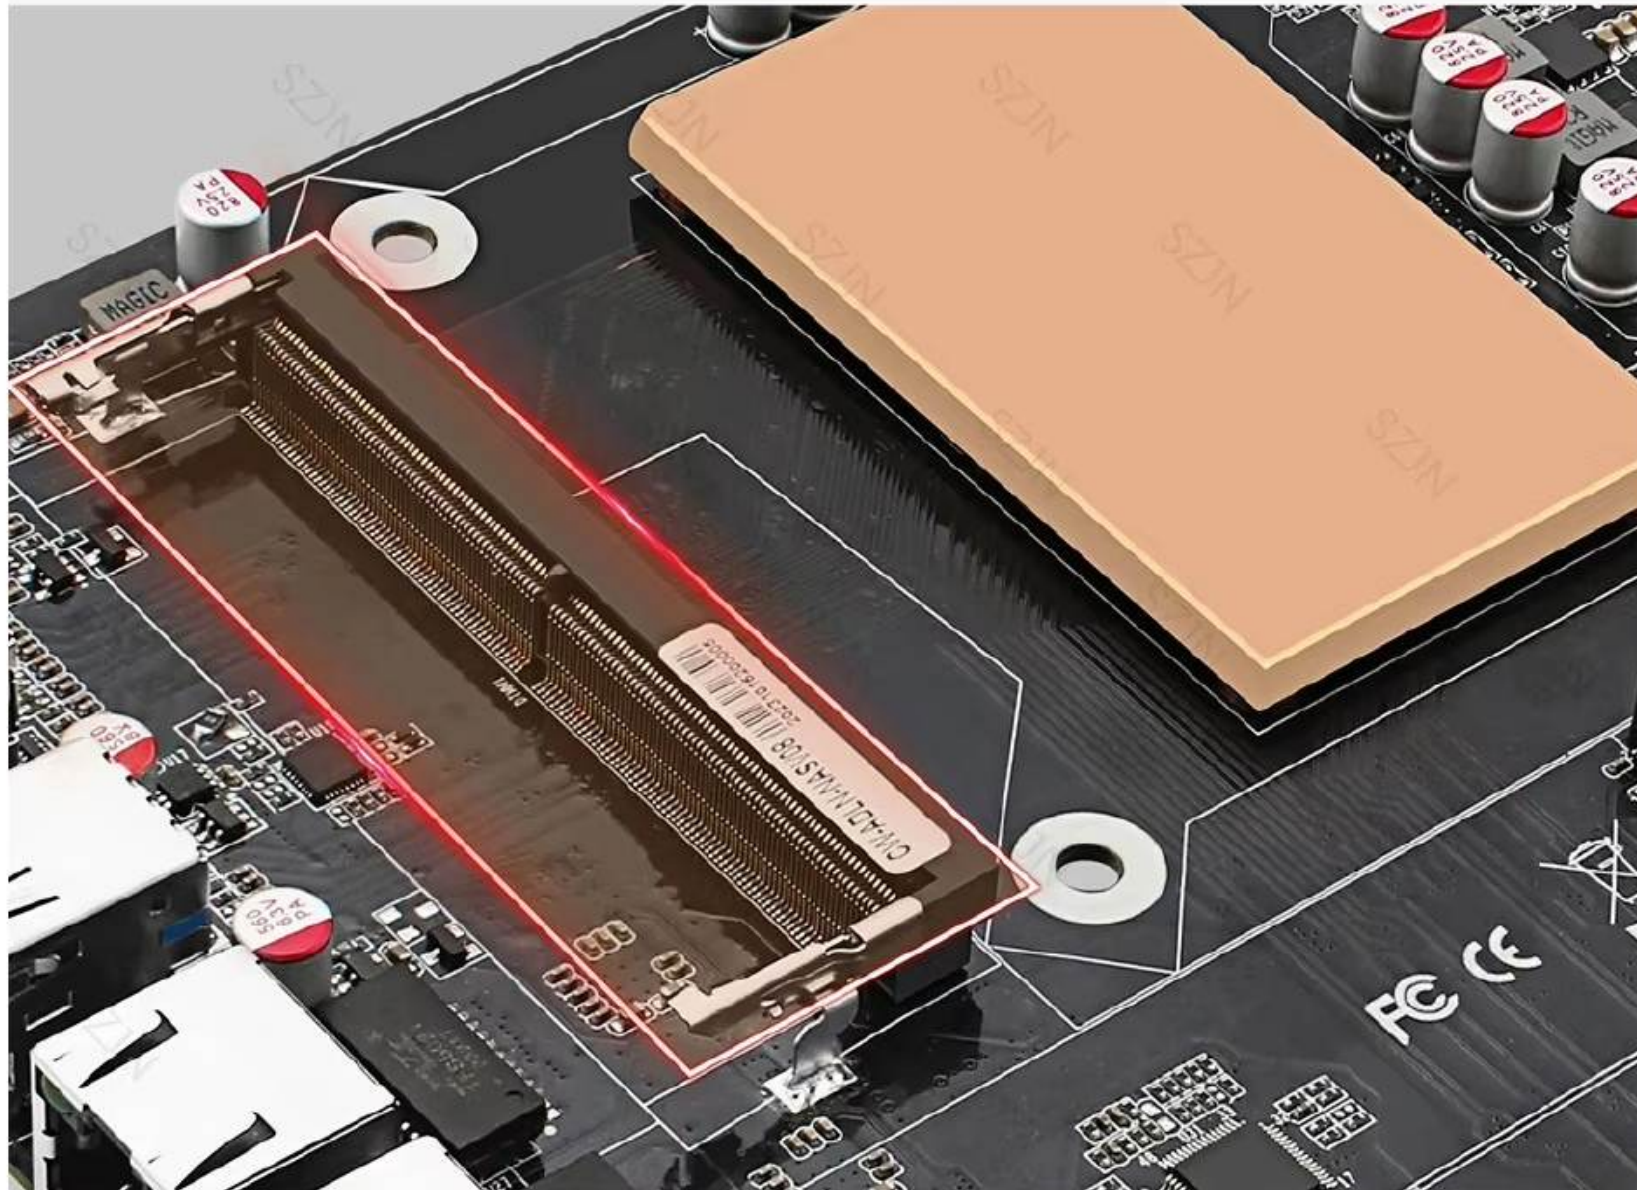

JMB585 Main control, high speed and stability

SATA1 native interface, equipped with original JMB585 chip

Expanded 5 SATA interfaces, each port transmission rate can reach 6Gbps

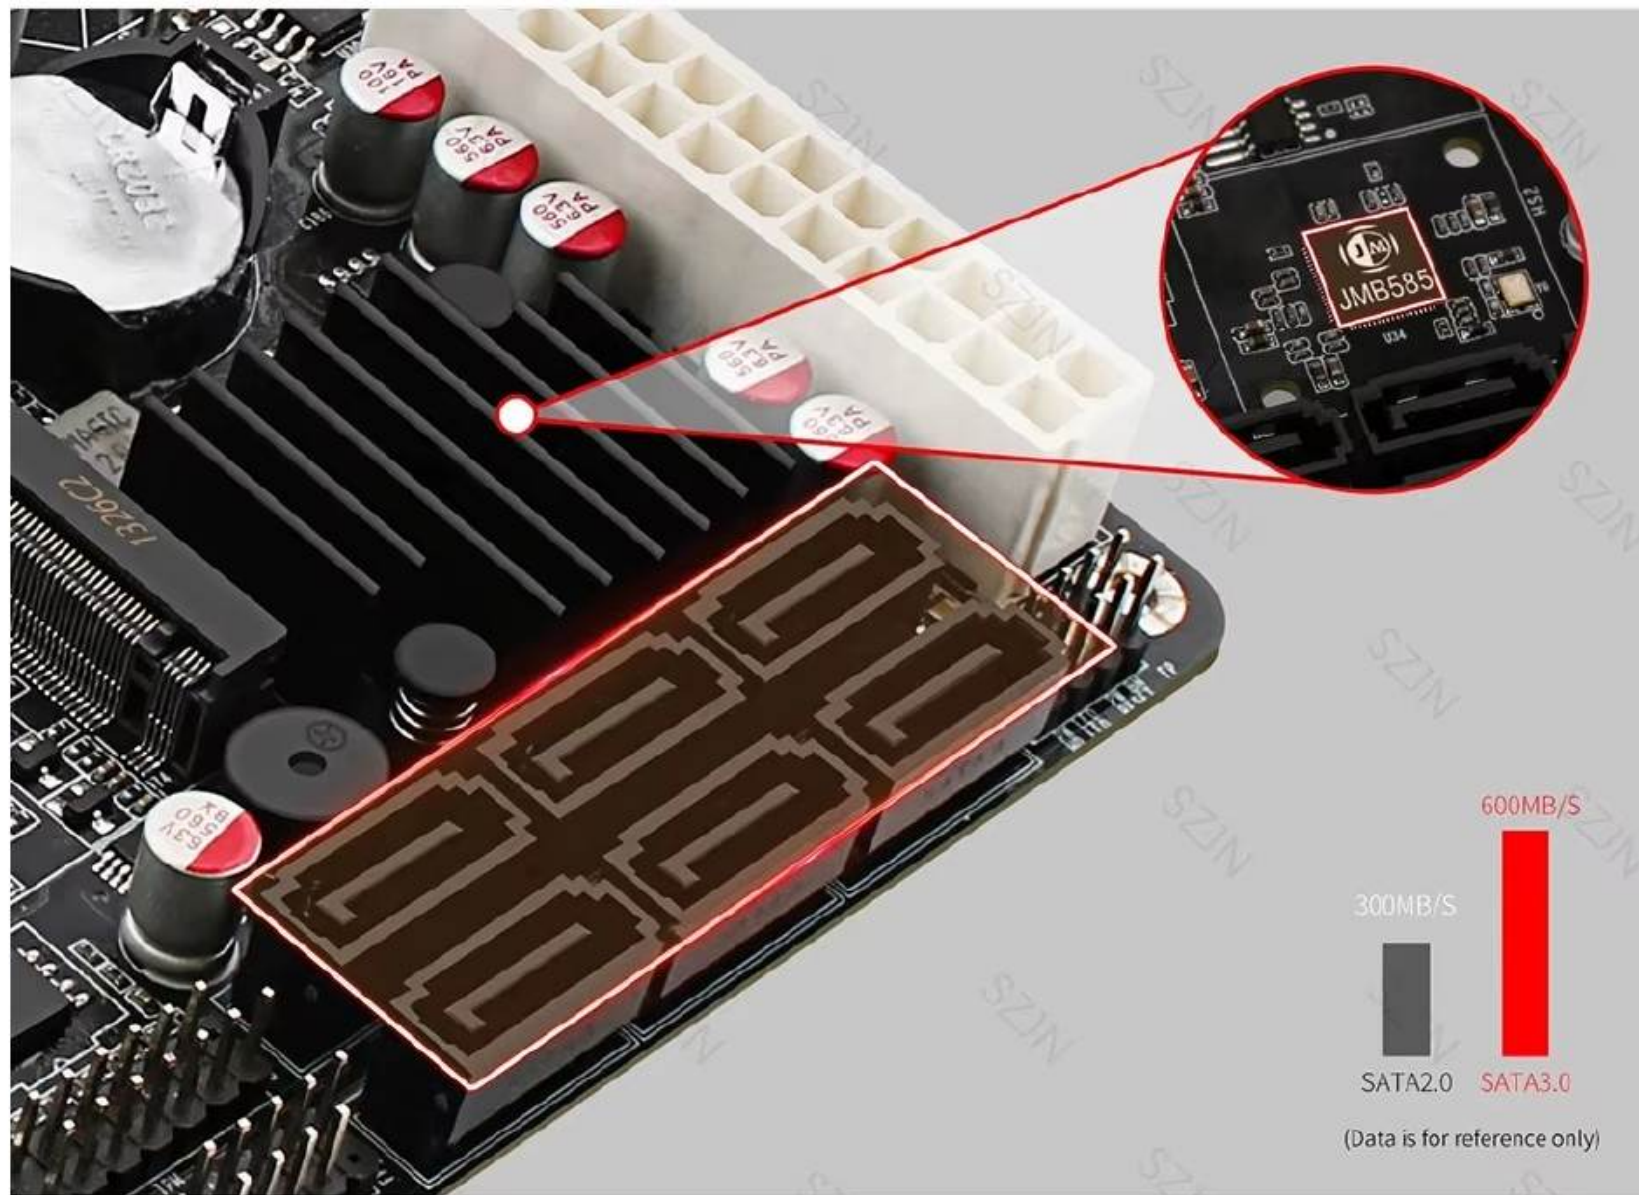

PCIe x1


PCIe 3.0 x1 interface can be expanded with PCIe card and PCIe to SATA adapter board

Multiplexing with the second onboard NVMe M.2 socket



PCIe NVMe M.2 High speed and stability

Supports dual PCIe 3.0 x1 M.2 solid state drives, the rate can reach 900M/s +
Choose one of M.2 slot 2 and PCIe slot

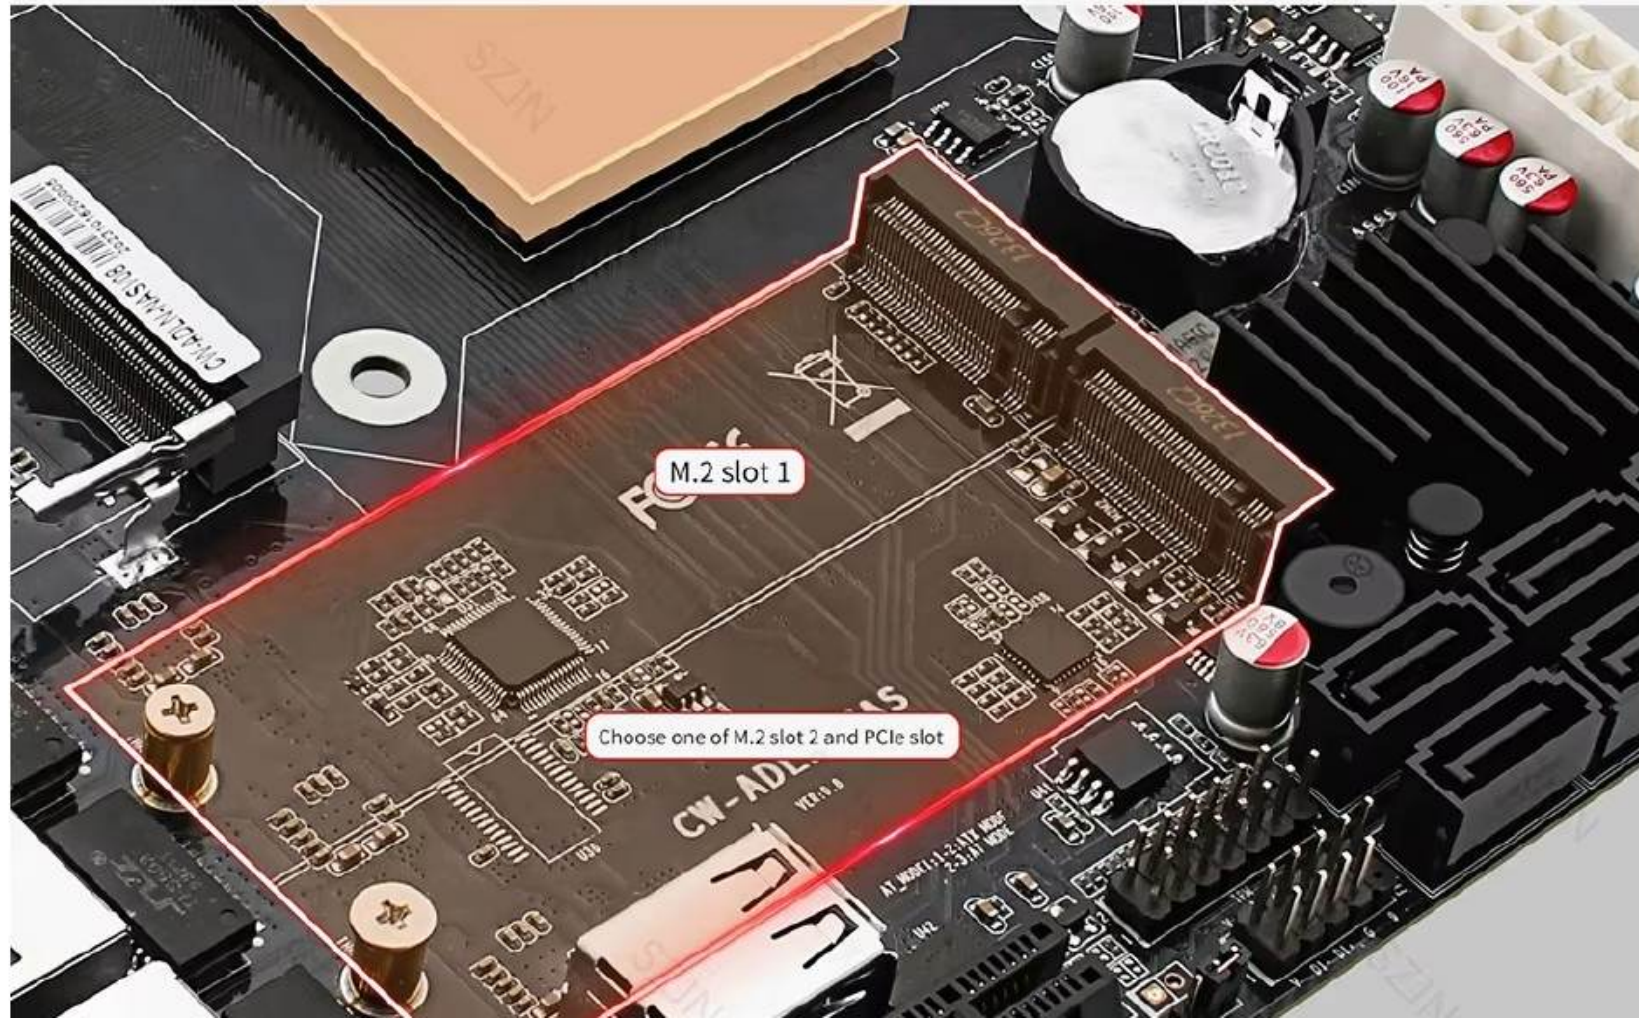





Silent temperature controlled radiator

Fan mounting holes support standard 115X and are compatible with mainstream radiators on the market

Two high-performance radiators are available (hole spacing: 75mm*75mm)

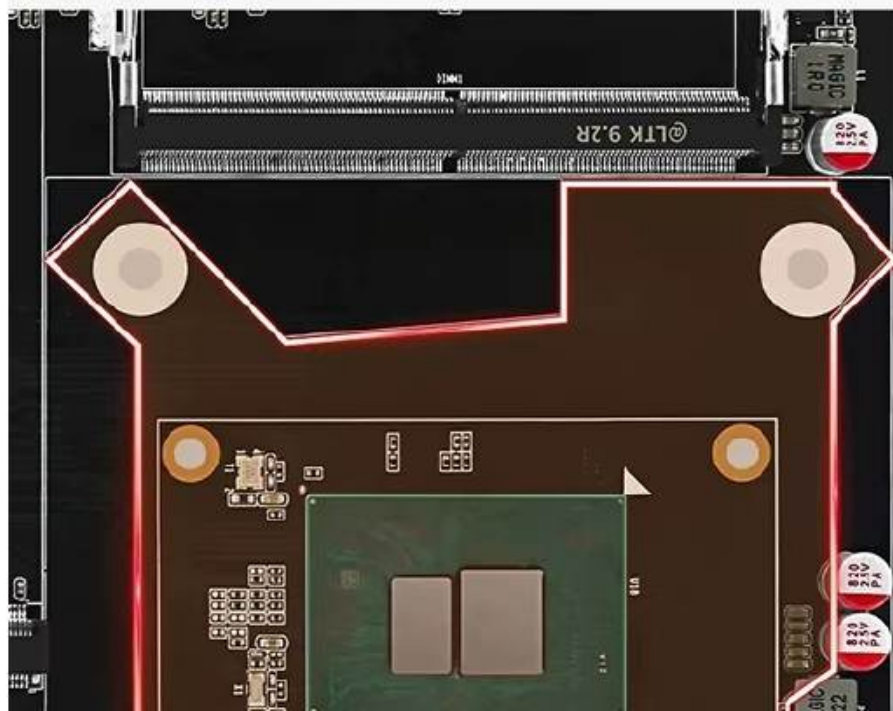

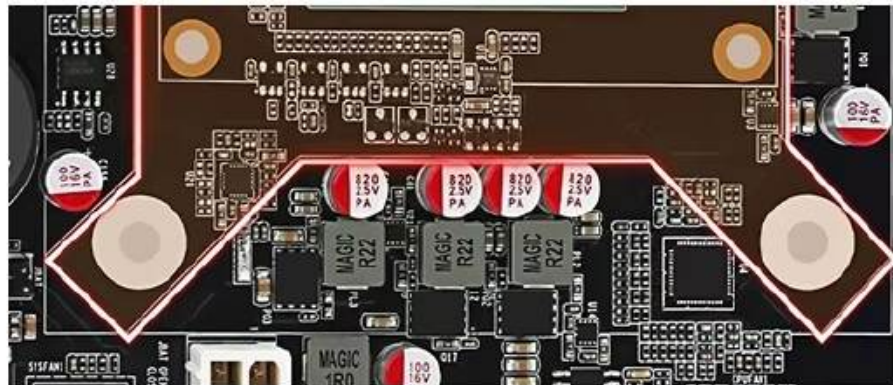

Packaging Details

Unit Type:	piece
Package Size:	25cm x 25cm x 25cm
Package Weight:	0.6kg