

## FORK COMPATIBILITY LIST - PROGUARD BOLT ON MUDGUARDS

\*\*\* ALWAYS CHECK BOTTOM OUT CLEARANCE BEFORE USE AS MANUFACTURERS ARE CHANGING THEIR DESIGNS CONSTANTLY \*\*\*

## CHECK YOUR FORK COMPLIES WITH THESE 3 THINGS:

1. YOUR FORK MUST HAVE THREADED HOLES - SOME OE FORKS COME WITHOUT THREADED HOLES
2. MINIMUM OFFSET IS 44MM
3. FORK WHEEL SIZE IS 27.5" OR 29"

## KEY

	COMPATIBLE	➡	ANY NUMBER SHOWN RELATES TO THE ADAPTER REQUIRED (SEE ADAPTER LIST AT BOTTOM)
	MAY BE COMPATIBLE	➡	SEE NOTES - MAY BE MODEL SPECIFIC OR NEED MODIFICATION - NUMBER SHOWS ADAPTER BRACKET ALSO REQUIRED - SEE ADAPTERS
	UNKNOWN / NOT TESTED	➡	COMPATABILITY UNKNOWN / NOT TESTED
	NOT COMPATIBLE	➡	CABLE TIE PROGUARDS ARE COMPATIBLE WITH MOST CONVENTIONAL FORKS (VELCRO PACKS ALSO AVAILABLE)
V1	ORIGINAL BOLT ON V1	➡	SIZES AVAILABLE - MINI / STANDARD
V2	NEW BOLT ON V2	➡	SIZES AVAILABLE - MINI / STANDARD / MAX PROTECTION (NOTE: MAX PROTECTION NOT RECOMMENDED FOR AGGRESSIVE / DH RIDING)

[illegible]



ZERON35/36										
RAIDON32/34										
XCR32										Use the M6 bolt for the centre threaded hole only
XCR34										May need supplied tilt bracket to raise the front
XCM										Use M6 bolt for centre threaded hole
XCM32										
XCM34										Use M6 bolt for centre threaded hole
XCT										Needs SR SUNTOUR Sleeve Pack
XCE 27.5"										May need to use supplied Tilt Bracket to lower front
<b>XFUSION</b>	<b>&lt;2020</b>	<b>2020</b>	<b>2021</b>	<b>2022</b>	<b>2023</b>	<b>2024</b>	<b>2025</b>	<b>2026</b>	<b>NOTES</b>	
RV-1 HLR / METRIC										Not enough tyre clearance
TRACE 34										OEM fork
TRACE 36										
SWEEP / SLANT										No threaded holes
MCQUEEN										
REVEL X										Not compatible with any upside down fork
REZA										Possibly may fit with our M6 centre bolt, not tested though
SLIDE 32MM/ 34MM										No threaded holes
VELVET										No threaded holes
RC32										No threaded holes
MIG 27.5 32										Bolt On v1 use just M6 centre bolt to secure / for v2 use Adapter Bracket 11 detailed below
<b>EXT - EXTREME SHOX</b>	<b>&lt;2020</b>	<b>2020</b>	<b>2021</b>	<b>2022</b>	<b>2023</b>	<b>2024</b>	<b>2025</b>	<b>2026</b>	<b>NOTES</b>	
ERA V1										Bolt on v1 - screw bolts through slots to cut into plastic first / check bottom out - may need to modify see how below
ERA V2 & V2.1										Bolt on v1 - screw bolts through slots to cut into plastic first / check bottom out - may need to modify see how below
<b>OTHERS FORKS NOT LISTED ABOVE</b>									<b>NOTES</b>	
CANE CREEK										Adapter was designed but there was insufficient tyre clearance
FORMULA										2023 Earlier - No threaded holes in rear of fork brace
RST SELVA										
BOS										No threaded holes in rear of fork brace
MRP										No threaded holes in rear of fork brace
DT SWISS										Adapter was designed but there was insufficient stability and clearance
TRUST										No threaded holes or rear fork brace
INTEND/MANITOU										Doesn't fit upside-down forks
<i>* The year your fork or bike was purchased brand new isn't always the model year (MY) of your fork - older model year forks are sold on brand new bikes so check first</i> <i>EVERY EFFORT IS MADE TO ENSURE THE ABOVE DETAILS ARE CORRECT, THERE ARE HUNDREDS OF FORKS / VARIATIONS SO PLEASE ADVISE IF NOT CORRECT</i>										

## PROGUARD ADAPTER BRACKET DETAILS

No	PRODUCT CODE	PRODUCT NAME	MUDGUARD	PRODUCT / DESCRIPTION
1	PGBOF34	FOX 34 (HOLLOW BRACE) NON STEP-CAST ADAPTER BRACKET	v2	FOX 34 (HOLLOW BRACE) NON STEP-CAST ADAPTER BRACKET - NON STEP-CAST only
2	PGBOF34S	FOX 34 (HOLLOW BRACE) STEP-CAST ADAPTER BRACKET	v1 & v2	FOX 34 (HOLLOW BRACE) STEP-CAST ADAPTER BRACKET - STEP-CAST version only
3	PGBOF36	FOX 36 STABILITY BRACKET	v1 & v2	FOX 36 STABILITY BRACKET (supplied with mudguard)
4	PGBOF40	FOX 40/49 ADAPTER BRACKET (49 v2 ONLY) 26" & 27.5"	v1 & v2	FOX 40/49 ADAPTER BRACKET 26" & 27.5" forks only - Fox 49 use v2 ONLY
5	PGBOZD	ROCKSHOX ZEB / DOMAIN ADAPTER BRACKET	v2	ROCKSHOX ZEB / DOMAIN ADAPTER BRACKET (includes bolt)
6	PGBORXF34	OHLINS RXF34 FITTING KIT	v1 & v2	OHLINS RXF34 FITTING KIT required (includes spacer and bolt)
7	PGOSB	OHLINS RXF36 / DH38 STABILITY BRACKET	v1	v1 Ohlins STABILITY BRACKET for RXF36/DH38 (MINI ONLY for DH38 fit in highest position)
7a	PGOSB2	OHLINS RXF36 / DH38 STABILITY BRACKET	v2	v2 Ohlins STABILITY BRACKET for RXF36/DH38 (MINI ONLY for DH38 fit in highest position)
8	PGBORXF38	OHLINS RXF38 STABILITY BRACKET	v2	OHLINS RXF38 STABILITY BRACKET
9	PGBODVOB	DVO DIAMOND M4 x 14mm / Washer	v1 & v2	DVO DIAMOND M4 x 14mm / Washer
10	PGBODVO	DVO ONYX SC ADAPTER BRACKET & BOLT/WASHER	v1 & v2	DVO ONYX SC ADAPTER BRACKET & BOLT/WASHER (includes bolt / washer)
11	PGERAXFT36	EXT ERA/XFUSION TRACE36 ADAPTER BRACKET	v1 & v2	v1 & v2 EXT ERA / v1 & v2 - XFUSION TRACE36 - MIG 27.5 32 only needs bracket for v2
12	PGBOLP	ROCKSHOX LYRIK / PIKE ADAPTER BRACKET	v2	For Model Year (MY) 2022 Lyrik / Pike
13	PGBOSP	SR SUNTOUR - FITTING KIT (OPEN HOLE)	v1 & v2	For straight through UNTHREADED centre holes

## MODIFYING THE ORIGINAL BOLT ON V1

Some fork versions (RXF38) have extra large CSU crown that won't clear the bolt on v1 bracket on bottoming, however you still may be able to modify it to fit. You can see if your CSU is the standard or extra large version by simply measuring the widest point of the round top crown and checking the details below:





1. STANDARD CSU CROWN = Approximately 60mm
2. EXTRA LARGE CSU CROWN = Approximately 66mm -70mm

**NOTE:** You can check your bottom out clearance by removing the air from your fork and slowly depressing the fork to see if it clears the bracket

If yours is the XL version then you need to either buy the new bolt on v2 (which doesn't need modifying) or modify the bracket on your v1 mudguard for more bottom out clearance, you will still need the appropriate adapter bracket stated for you fork.

See how to modify below (WARNING - ADULTS ONLY):







**WARNING ADULTS ONLY:** BE CAREFUL NOT TO SLIP AND PUNCTURE THE MUDGUARD OR HURT YOURSELF

---

## MODEL YEAR 2026 Fox FORKS



---

## MODEL YEAR 2022 Fox 34

If you have the new MY22 Fox 34 fork with the hollowed out fork brace with no supports struts at the back (like the picture below), then you will need an adapter bracket, see compatibility below:

**V2** COMPATIBLE WITH THE STEP-CAST VERSION & NORMAL NON-STEP CAST VERSION


**V1** COMPATIBLE WITH THE STEP-CAST VERSION ONLY

**EXAMPLE - HOLLOW BRACE WITHOUT SUPPORTS:**



If you have a fork brace WITH centre support struts in the rear of the brace to support a mudguard, it will fit without an additional adapter bracket

**EXAMPLE - MY21 FOX FORK BRACES WITH SUPPORTS BELOW:**

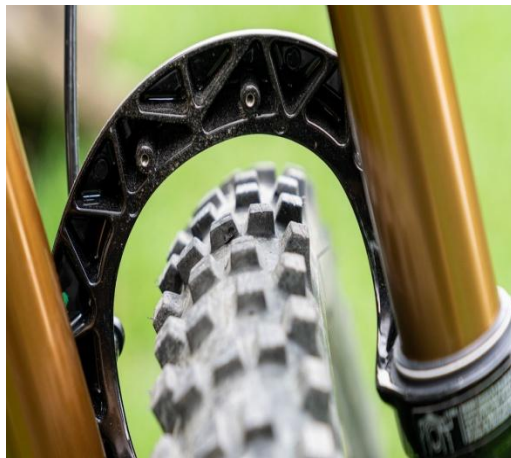

**EXAMPLE - FOX 34 STEP-CAST BELOW:**





EXAMPLE - MY20 (or earlier) FOX FORK BRACE WITH SUPPORTS BELOW:

