FORK COMPATIBILITY LIST - PROGUARD BOLT ON MUDGUARDS

*** ALWAYS CHECK BOTTOM OUT CLEARANCE BEFORE USE AS MANUFACTURERS ARE CHANGING THEIR DESIGNS CONSTANTLY ***

CHECK YOUR FORK COMPLIES WITH THESE 3 THINGS:

- 1. YOUR FORK MUST HAVE THREADED HOLES SOME OE FORKS COME WITHOUT THREADED HOLES
- 2. MINIMUM OFFSET IS 44MM
- 3. FORK WHEEL SIZE IS 27.5" OR 29"

	KEY									
	COMPATIBLE	•	ANY NUMBER SHOWN RELATES TO THE ADAPTER REQUIRED (SEE ADAPTER LIST AT BOTTOM)							
	MAY BE COMPATIBLE	•	SEE NOTES - MAY BE MODEL SPECIFIC OR NEED MODIFICATION - NUMBER SHOWS ADAPTER BRACKET ALSO REQUIRED - SEE ADAPTERS							
	UNKNOWN / NOT TESTED	•	COMPATABILITY UNKNOWN / NOT TESTED							
	NOT COMPATIBLE	•	CABLE TIE PROGUARDS ARE COMPATIBLE WITH MOST CONVENTIONAL FORKS (VELCRO PACKS ALSO AVAILABLE)							
V1	ORIGINAL BOLT ON V1	•	SIZES AVAILABLE - MINI / STANDARD							
V2	NEW BOLT ON V2	•	SIZES AVAILABLE - MINI / STANDARD / MAX PROTECTION (NOTE: MAX PROTECTION NOT RECOMMENDED FOR AGGRESSIVE / DH RIDING)							

MAKE / MODEL		*MOD	EL YEA	R (MY)			NOTES	
FOX	2019	2020	2021	2022	2023	2024		
32								
34 NON STEP-CAST				1	1	1	V2 ONLY - Hollow fork brace versions with no supports need an adapter bracket (see below)	
34 STEP-CAST				2	2	2	V1 & V2 (V2 tight fit) - Hollow fork brace versions with no supports need an adapter bracket (see below)	
36			3	3	3	3	MY2021 needs Fox 36 Stability Bracket (supplied) - Must check earlier models for bottom out clearance	
38								
40	4	4						
49	4	4						
AWL 29"								
MARZOCCHI	2019	2020	2021	2022	2023	2024	NOTES	
BOMBER Z1								
BOMBER Z2							Z2 forks don't come with any threaded holes - if you decide to add helicoil threads then it will fit	
BOMBER 58								
BOMBER DJ								
ROCKSHOX	2019	2020	2021	2022	2023	2024	NOTES	
RECON GOLD								
RECON SILVER							BOOST HUB FORKS ONLY - Use the M6 bolt for the centre threaded hole only	
JUDY GOLD								
JUDY SILVER							If it has threaded holes, use the M6 bolt for the centre threaded hole only (tight fit)	
BLUTO							No threaded holes	
REBA							If it has threaded holes, use the M6 bolt for the centre threaded hole only	

35 GOLD / SILVER							Use the M6 bolt for the centre threaded hole only		
SID ULTIMATE							ose the wo sole for the centre threaded hole only		
SID SELECT+									
SID SELECT / BASE									
SID SL									
REVELATION									
PARAGON							Use the M6 bolt for the centre threaded hole only		
YARI							·		
RUDY XPLR							Use the M6 bolt for the centre threaded hole only		
PIKE				12	12	12	Need to use Lyrik / Pike Adapter Bracket		
LYRIK - MTB FORK				12	12	12	V2 only - Need to use Lyrik / Pike Adapter Bracket		
LYRIK UTILITY FORK							As used on Utility bikes with additional mounts - Use the M6 bolt for the centre threaded hole only		
ZEB			5	5	5	5	V2 ONLY - v1 not compatible - Needs Zeb / Domain adapter bracket - Don't use MAX size as not stable enough		
DOMAIN				5	5	5	V2 ONLY - v1 not compatible - Needs Zeb / Domain adapter bracket - Don't use MAX size as not stable enough		
BOXXER									
OHLINS	<2020	2020	2021	2022	2023	2024	NOTES		
RXF32									
RXF34		6	6	6	6	6	Need to use RXF34 Fitting Kit		
RXF36		7	7	7	7	7	For V2 only use MINI & STD sizes with PGOSB stability bracket due to stability - new v2 bracket coming soon		
17/1 30		,	,						
RXF38			8	8	8	8	V1 not compatible with 70mm XL CSU crown - see how to modify the bolt on v1 below		
		7	,		8				
RXF38	<2020	7	8	8		8	V1 not compatible with 70mm XL CSU crown - see how to modify the bolt on v1 below		
RXF38 DH38	<2020	7	8	8	7	8 7	V1 not compatible with 70mm XL CSU crown - see how to modify the bolt on v1 below Needs Ohlins RXF36 Stability Bracket - Max size not suitable for DH due to poor rubber contact with fork		
RXF38 DH38 DVO	<2020	7	8 7 2021	8 7 2022	7 2023	8 7 2024	V1 not compatible with 70mm XL CSU crown - see how to modify the bolt on v1 below Needs Ohlins RXF36 Stability Bracket - Max size not suitable for DH due to poor rubber contact with fork NOTES		
RXF38 DH38 DVO DIAMOND D1 TO E3	<2020	7	8 7 2021 9	8 7 2022 9	7 2023 9	8 7 2024 9	V1 not compatible with 70mm XL CSU crown - see how to modify the bolt on v1 below Needs Ohlins RXF36 Stability Bracket - Max size not suitable for DH due to poor rubber contact with fork NOTES Needs our custom bolt / washer		
RXF38 DH38 DVO DIAMOND D1 TO E3 ONYX SC - D1 TO E1	<2020	7	8 7 2021 9	8 7 2022 9	7 2023 9	8 7 2024 9	V1 not compatible with 70mm XL CSU crown - see how to modify the bolt on v1 below Needs Ohlins RXF36 Stability Bracket - Max size not suitable for DH due to poor rubber contact with fork NOTES Needs our custom bolt / washer		
DH38 DVO DIAMOND D1 TO E3 ONYX SC - D1 TO E1 ONYX D1 38	<2020	7	8 7 2021 9	8 7 2022 9	7 2023 9	8 7 2024 9	V1 not compatible with 70mm XL CSU crown - see how to modify the bolt on v1 below Needs Ohlins RXF36 Stability Bracket - Max size not suitable for DH due to poor rubber contact with fork NOTES Needs our custom bolt / washer		
DH38 DVO DIAMOND D1 TO E3 ONYX SC - D1 TO E1 ONYX D1 38 ONYX DC	<2020 	7 2020	8 7 2021 9	8 7 2022 9	7 2023 9	8 7 2024 9 10	V1 not compatible with 70mm XL CSU crown - see how to modify the bolt on v1 below Needs Ohlins RXF36 Stability Bracket - Max size not suitable for DH due to poor rubber contact with fork NOTES Needs our custom bolt / washer		
RXF38 DH38 DVO DIAMOND D1 TO E3 ONYX SC - D1 TO E1 ONYX D1 38 ONYX DC SAPPHIRE D1 SR SUNTOUR RUX38		7 2020	8 7 2021 9 10	8 7 2022 9 10	7 2023 9 10	8 7 2024 9 10	V1 not compatible with 70mm XL CSU crown - see how to modify the bolt on v1 below Needs Ohlins RXF36 Stability Bracket - Max size not suitable for DH due to poor rubber contact with fork NOTES Needs our custom bolt / washer Needs our DVO D1 Onyx SC Adapter Bracket and bolt / washer		
RXF38 DH38 DVO DIAMOND D1 TO E3 ONYX SC - D1 TO E1 ONYX D1 38 ONYX DC SAPPHIRE D1 SR SUNTOUR RUX38 DUROLUX36		7 2020	8 7 2021 9 10	8 7 2022 9 10	7 2023 9 10	8 7 2024 9 10	V1 not compatible with 70mm XL CSU crown - see how to modify the bolt on v1 below Needs Ohlins RXF36 Stability Bracket - Max size not suitable for DH due to poor rubber contact with fork NOTES Needs our custom bolt / washer Needs our DVO D1 Onyx SC Adapter Bracket and bolt / washer NOTES		
RXF38 DH38 DVO DIAMOND D1 TO E3 ONYX SC - D1 TO E1 ONYX D1 38 ONYX DC SAPPHIRE D1 SR SUNTOUR RUX38 DUROLUX36 DUROLUX38		7 2020	8 7 2021 9 10	8 7 2022 9 10	7 2023 9 10	8 7 2024 9 10	V1 not compatible with 70mm XL CSU crown - see how to modify the bolt on v1 below Needs Ohlins RXF36 Stability Bracket - Max size not suitable for DH due to poor rubber contact with fork NOTES Needs our custom bolt / washer Needs our DVO D1 Onyx SC Adapter Bracket and bolt / washer NOTES		
RXF38 DH38 DVO DIAMOND D1 TO E3 ONYX SC - D1 TO E1 ONYX D1 38 ONYX DC SAPPHIRE D1 SR SUNTOUR RUX38 DUROLUX36 DUROLUX38 AURON35		7 2020	8 7 2021 9 10	8 7 2022 9 10	7 2023 9 10	8 7 2024 9 10	V1 not compatible with 70mm XL CSU crown - see how to modify the bolt on v1 below Needs Ohlins RXF36 Stability Bracket - Max size not suitable for DH due to poor rubber contact with fork NOTES Needs our custom bolt / washer Needs our DVO D1 Onyx SC Adapter Bracket and bolt / washer NOTES		
RXF38 DH38 DVO DIAMOND D1 TO E3 ONYX SC - D1 TO E1 ONYX D1 38 ONYX DC SAPPHIRE D1 SR SUNTOUR RUX38 DUROLUX36 DUROLUX38		7 2020	8 7 2021 9 10	8 7 2022 9 10	7 2023 9 10	8 7 2024 9 10	V1 not compatible with 70mm XL CSU crown - see how to modify the bolt on v1 below Needs Ohlins RXF36 Stability Bracket - Max size not suitable for DH due to poor rubber contact with fork NOTES Needs our custom bolt / washer Needs our DVO D1 Onyx SC Adapter Bracket and bolt / washer NOTES		

AXON32/34/35									
AXON36/38									
ZERON35/36									
RAIDON32/34									
XCR32							Use the M6 bolt for the centre threaded hole only		
XCR34							May need supplied tilt bracket to raise the front		
XCM							Use M6 bolt for centre threaded hole		
XCM32									
XCM34							Use M6 bolt for centre threaded hole		
ХСТ					13	13	Needs SR SUNTOUR Sleeve Pack		
XCE 27.5"							May need to use supplied Tilt Bracket to lower front		
XFUSION	<2020	2020	2021	2022	2023	2024	NOTES		
RV-1 HLR / METRIC							Not enough tyre clearance		
TRACE 34							OEM fork		
TRACE 36		11	11	11	11	11			
SWEEP / SLANT							No threaded holes		
MCQUEEN									
REVEL X							Not compatible with any upside down fork		
SLIDE 32MM/ 34MM							No threaded holes		
VELVET							No threaded holes		
RC32							No threaded holes		
MIG 27.5 32		11	11	11	11	11	Bolt On v1 use just M6 centre bolt to secure / for v2 use Adapter Bracket 11 detailed below		
EXTREME SHOX	<2020	2020	2021	2022	2023	2024			
ERA V1		11	11	11	11	11	Bolt On v1 - screw bolts through slots first to cut plastic as holes are too tight - Bolt On v2 is fine		
ERA V2				11	11	11	Bolt On v1 - screw bolts through slots first to cut plastic as holes are too tight - Bolt On v2 is fine		
OTHE	RS FORKS NOT LISTED ABOVE						NOTES		
CANE CREEK							Adapter was designed but there was insufficient tyre clearance		
BRIGHT RACING							Doesn't fit upside-down forks		
FORMULA							2023 Earlier - No threaded holes in rear of fork brace		
RST SELVA									
MANITOU							Doesn't fit upside-down or reverse arch forks		
BOS							No threaded holes in rear of fork brace		
MRP							No threaded holes in rear of fork brace		
DT SWISS							Adapter was designed but there was insufficient stability and clearance		
TRUST							No threaded holes or rear fork brace		
INTEND / WREN							Doesn't fit upside-down forks		
* The year your fork or	r hika wa	ac nurch	acad hr	and nov	uicn't al	Maye +h	a model year (MV) of your fork - older model year forks are sold on brand new hikes so sheek first		

^{*} The year your fork or bike was purchased brand new isn't always the model year (MY) of your fork - older model year forks are sold on brand new bikes so check first

EVERY EFFORT IS MADE TO ENSURE THE ABOVE DETAILS ARE CORRECT, THERE ARE HUNDREDS OF FORKS / VARIATIONS SO PLEASE ADVISE IF NOT CORRECT

	PROGUARD ADAPTER BRACKET DETAILS										
No	CODE	PRODUCT NAME	MUDGUARD	PRODUCT / DESCRIPTION							
1	PGBOF34	FOX 34 (HOLLOW BRACE) NON STEP-CAST ADAPTER BRACKET	V2	FOX 34 (HOLLOW BRACE) NON STEP-CAST ADAPTER BRACKET - NON STEP-CAST version only							
2	PGBOF34S	FOX 34 (HOLLOW BRACE) STEP-CAST ADAPTER BRACKET	V1 & V2	FOX 34 (HOLLOW BRACE) STEP-CAST ADAPTER BRACKET - STEP-CAST version only							
3	PGBOF36	FOX 36 STABILITY BRACKET	V1 & V2	FOX 36 STABILITY BRACKET - Supplied with v1 mudguard / not supplied with v2 mudguard							
4	PGBOF40	FOX 40/49 ADPATER BRACKET (49 v2 ONLY) 26" & 27.5"	V1 & V2	FOX 40/49 ADPATER BRACKET (49 v2 ONLY) 26" & 27.5" forks only (includes bolts / washer)							
5	PGBOZD	ROCKSHOX ZEB / DOMAIN ADAPTER BRACKET	V2	ROCKSHOX ZEB / DOMAIN ADAPTER BRACKET (includes bolt)							
6	PGBORXF34	OHLINS RXF34 FITTING KIT	V1 & V2	OHLINS RXF34 FITTING KIT required (includes spacer and bolt)							
7	PGOSB	OHLINS RXF36 / DH38 STABILITY BRACKET	V1 & V2	Ohlins STABILITY BRACKET for RXF36 / DH38							
8	PGBORXF38	OHLINS RXF38 STABILITY BRACKET	V2	OHLINS RXF38 STABILITY BRACKET							
9	PGBODVOB	DVO DIAMOND M4 x 14mm / Washer	V1 & V2	DVO DIAMOND M4 x 14mm / Washer							
10	PGBODVO	DVO ONYX SC ADAPTER BRACKET & BOLT/WASHER	V1 & V2	DVO ONYX SC ADAPTER BRACKET & BOLT/WASHER (includes bolt / washer)							
11	PGERAXFT36	EXT ERA/XFUSION TRACE36 ADAPTER BRACKET	V1 & V2	v1 & v2 EXT ERA / v1 & v2 XFUSION TRACE36 - MIG 27.5 32 only needs bracket for v2							
12	PGBOLP	ROCKSHOX LYRIK / PIKE ADAPTER BRACKET	V2	For 2022 Lyrik / Pike							
13	PGBOSP	SR SUNTOUR - FITTING KIT (OPEN HOLE)	V1 & V2	For straight through UNTHREADED centre holes							

MODIFYING THE ORIGINAL BOLT ON V1

Some fork versions (RXF38) have extra large CSU crown that won't clear the bolt on v1 bracket on bottoming, however you still may be able to modify it to fit You can see if your CSU is the standard or extra large version by simply measuring the widest point of the round top crown and checking the details below:




1. STANDARD CSU CROWN = Approximately 60mm

2. EXTRA LARGE CSU CROWN = Approximately 66mm -70mm

NOTE: You can check your bottom out clearance by removing the air from your fork and slowly depressing the fork to see if it clears the bracket

If yours is the XL version then you need to either buy the new bolt on v2 (which doesn't need modifying) or modify the bracket on your v1 mudguard for more bottom out clearance, you will still need the appropriate adapter bracket stated for you fork.

See how to modify below (WARNING - ADULTS ONLY):

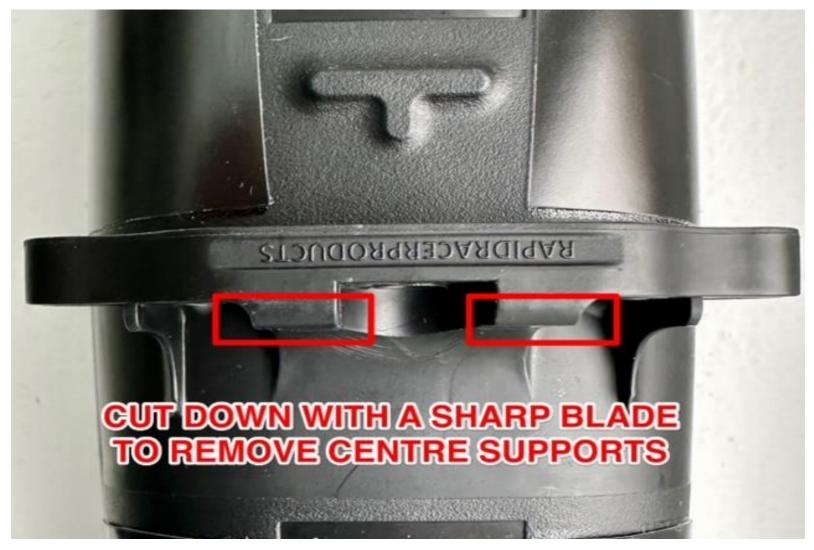

WARNING ADULTS ONLY: BE CAREFUL NOT TO SLIP AND PUNCTURE THE MUDGUARD OR HURT YOURSELF

MODEL YEAR 2022 Fox 34


If you have the new MY22 Fox 34 fork with the hollowed out fork brace with no supports struts at the back (like the picture below), then you will need an adapter bracket, see compatibility below:

- V2 COMPATIBLE WITH THE STEP-CAST VERSION & NORMAL NON-STEP CAST VERSION
- V1 COMPATIBLE WITH THE STEP-CAST VERSION ONLY

EXAMPLE - HOLLOW BRACE WITHOUT SUPPORTS:



EXAMPLE - MY21 FOX FORK BRACES WITH SUPPORTS BELOW:

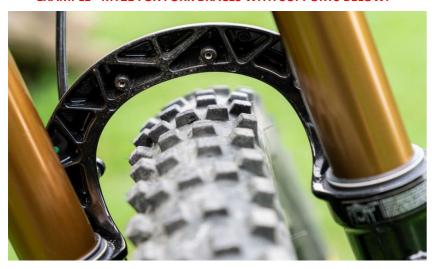

EXAMPLE - MY20 (or earlier) FOX FORK BRACE WITH SUPPORTS BELOW:



EXAMPLE - FOX 34 STEP-CAST BELOW:

