

- (e) Avoid cutting into the natural stone wall of a street.
- (f) Avoid and minimise excavation where possible.
- (g) Minimise the inclination of any resulting sloping landscaping.
- (h) Existing natural features including trees and sandstone walls should be retained and incorporated as landscape features on the site in order to maintain the natural character of the landscape.
- (i) Step retaining walls in response to the natural landform to avoid creating monolithic structures, particularly where visible from the neighbouring dwellings and the public domain.
- (j) For sites with significant slopes a split-level building design is to be used to minimise excavation and backfilling.
- (k) Fill is not to be used to raise the ground level.
- (l) Excavation for garaging within sandstone walls facing the street must be minimised to preserve as much of the original wall as possible.
- (m) Development should accommodate stormwater detention tanks and storage systems within the excavated area.
- (n) Excavation is not permitted within 900mm of side boundaries and shall only occur within the building footprint, except where access to a basement car park is required.
- (o) Basement car parking is to be located fully below natural ground level. Where this cannot be achieved due to topographic constraints, a maximum protrusion above ground of 1.2m is permissible (refer to Figure 25).
- (p) Where excavation is proposed for development which is subject to Part C2 of this DCP, it is not to occur within a 1.5m setback from side boundaries and shall only occur within the building footprint except where access to a basement car park is required. Excavation will need to be setback greater where required to comply with Part C2, 2.3.2 Side and Rear Setbacks control (d).
- (q) All below-ground structures that are located below the groundwater table are to be fully tanked. These types of structures must not collect and dispose of subsoil/seepage to kerb and gutter.

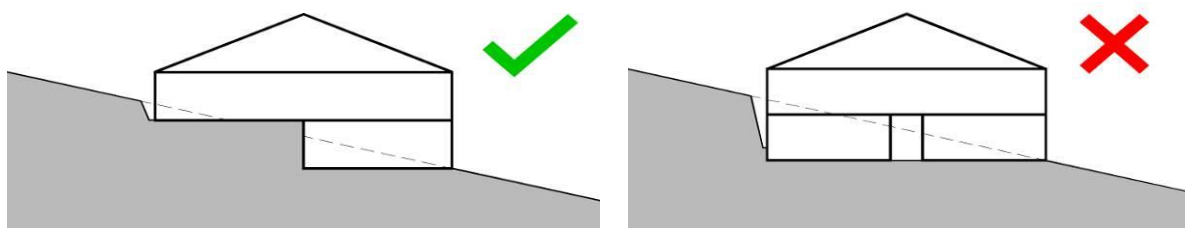


Figure 24 Habitable rooms are to have ample openings to an external wall for air and light.