

- vehicular turning movements into off street car parking areas (three or less movements).
- (vi) There is low on-street parking availability and no net car parking public benefit.
- (c) Where an applicant proposes to provide more than the number of on-site car spaces specified in (a), additional justification must be provided to cover matters such as, but not limited to the impact of:
- (i) The visual impact of parking accommodation compared to alternatives such as landscaping;
 - (ii) Any increased building bulk on the streetscape;
 - (iii) Any increased building bulk on the amenity of adjoining properties;
 - (iv) The loss of existing on-street parking illustrating existing and proposed off street parking;
 - (v) The level and impact of any excavation; and
 - (vi) Access to public transport.

1.8.3 Location

- (a) For new dwellings all on-site car parking is to be located behind the front building line.
- (b) For existing development, car spaces should be sited having regard to the following hierarchy (refer to Figure 11):
 - (i) Hardstand, carport or garage located at the rear of the site with access from secondary streets or lanes;
 - (ii) Hardstand, carport or garage located at the side of the dwelling behind the building alignment; or

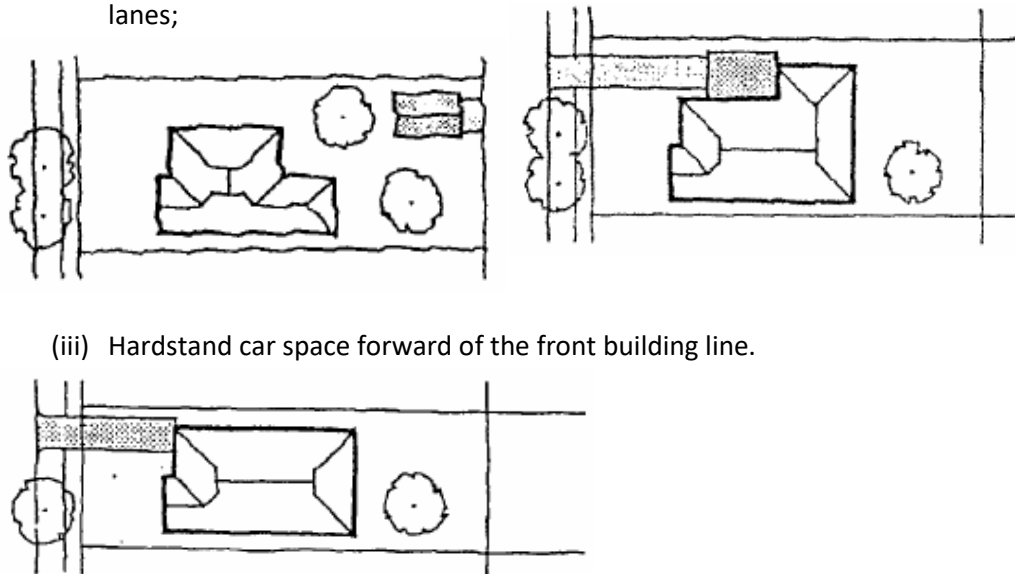


Figure 11 Hierarchy of preferred car parking locations

- (c) Garages on rear lanes must not create conflict with parking in the lane and result in the loss of laneway parking for any property other than the subject site.
- (d) A hardstand (in the form of wheel strips) or carport forward of the building line may be permitted where: