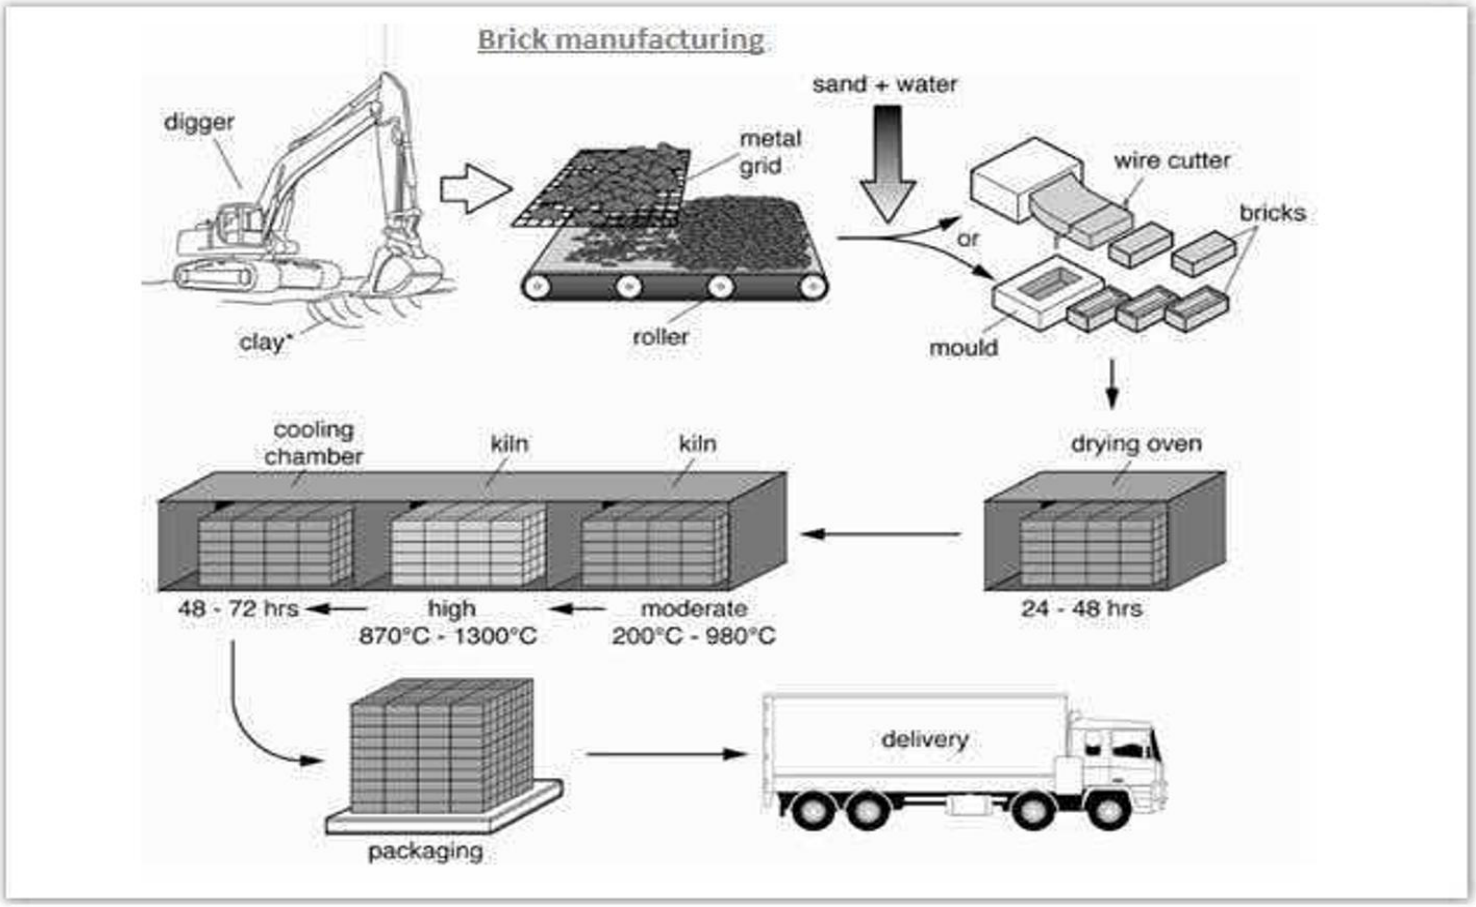


The given diagram shows how to manufacture bricks for the building industries through 9 steps.

As is given in the graph, the first step of brick manufacturing is digging the clay with a large digger. Then, this clay is filtered by the metal grid and processed in a roller machine, before being mixed with sand and water. In the fifth step, the mixture (混合物) is either kept in a mould or cut in a wire cutter to make the raw (原) shape of the bricks.

Afterwards, the shaped raw bricks are placed into a drying oven, where they are dried for 24 to 48 hours. After that, the dried raw bricks are processed in a kiln, both in moderate and high temperature, up to 1300 degree centigrade and then placed in a cooling chamber for about 48 to 72 hours. This process prepares the brick for the follow-up (adj. 接下来的) steps — packaging and delivery. The delivery process is the final process of brick manufacturing.

As it is noted, brick making is a moderately complex process that requires some predefined work to make it usable.