




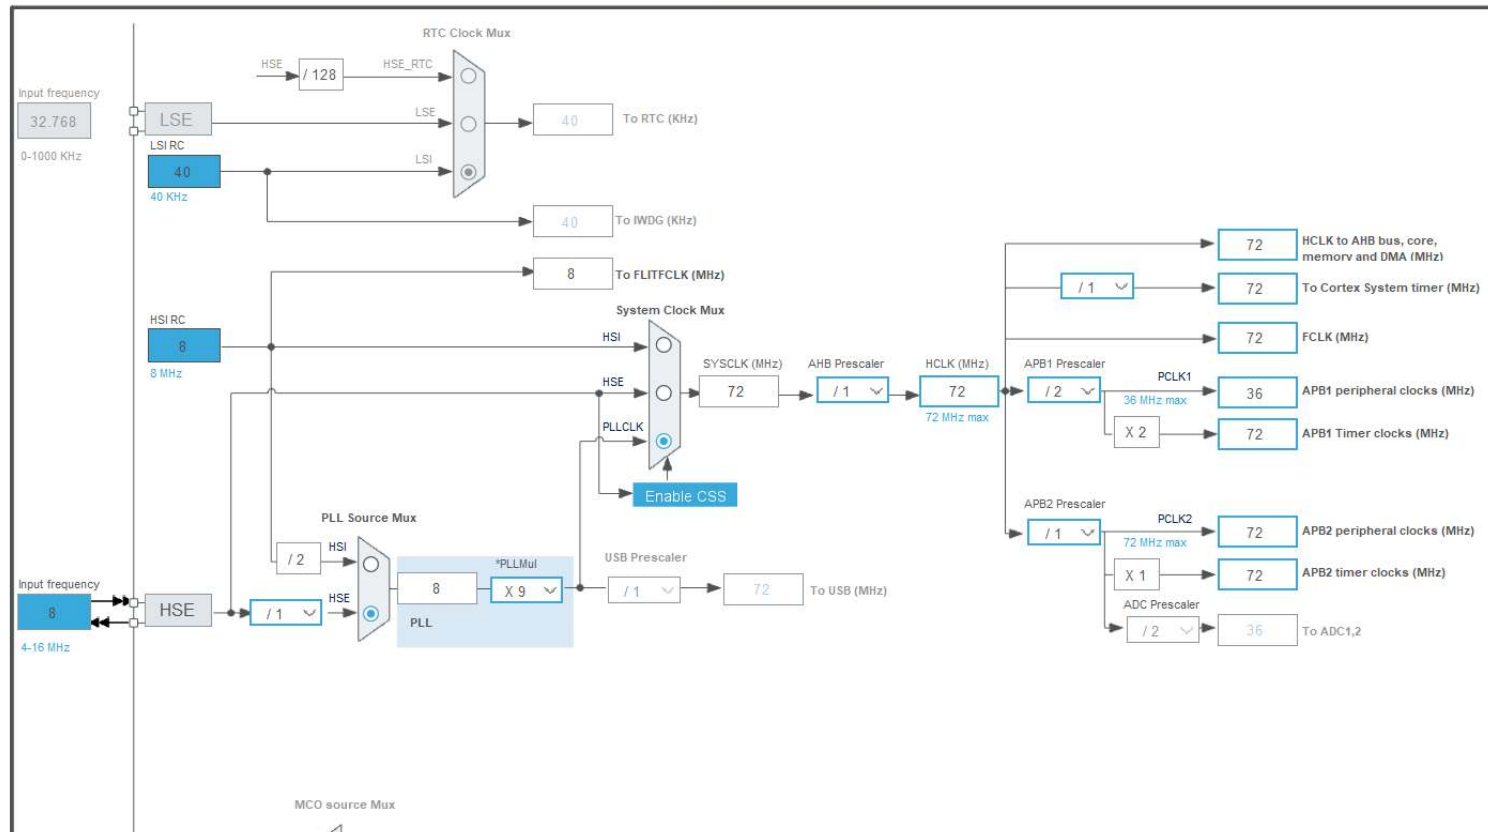

Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout



Categories A-Z

System Core >

Analog >

Timers >

Connectivity >

CAN

I2C1

☒ I2C2

SPI1

SPI2

☒ USART1☒ USART2☒ USART3

USB

Computing >

Middleware and Software Packs >

I2C2 Mode and Configuration

Mode

I2C

I2C

Configuration

Reset Configuration

☒ NVIC Settings☒ DMA Settings☒ GPIO Settings☒ Parameter Settings☒ User Constants

Configure the below parameters :

 Search (Ctrl+F)

Master Features

I2C Speed Mode

Standard Mode

I2C Clock Speed (Hz)

100000

Slave Features

Clock No Stretch Mode

Disabled

Primary Address Length selection


7-bit

Dual Address Acknowledged

Disabled

Pinout view

System view

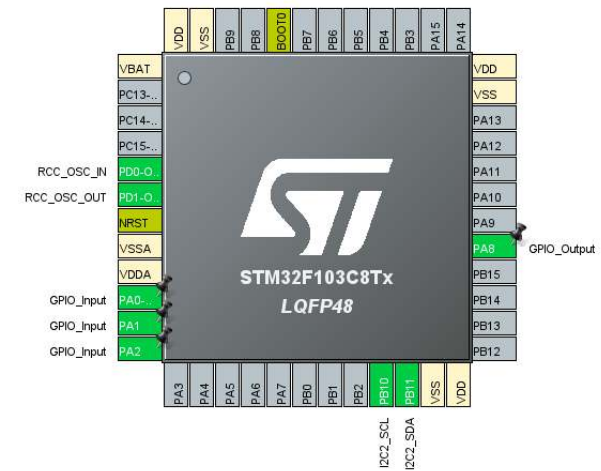



Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search



Categories A-Z

System Core >

Analog >

Timers >

RTC

TIM1

TIM2

TIM3

TIM4

Connectivity >

Computing >

Middleware and Software Packs >

TIM3 Mode and Configuration

Mode

Slave Mode	Disable
Trigger Source	Disable
☒ Internal Clock	
Channel1	Disable
Channel2	Disable
Channel3	Disable
Channel4	Disable
Combined Channels	Disable
☐ XOR activation	
☐ One Pulse Mode	

Configuration

Reset Configuration

☒ Parameter Settings ☒ User Constants ☒ NVIC Settings ☒ DMA Settings

Configure the below parameters :

Search (Ctrl+F)

Counter Settings


Prescaler (PSC - 16 bits value)	7199
Counter Mode	Up
Counter Period (AutoReload Register - 4999)	
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
-----------------------------	--

Pinout view

System view

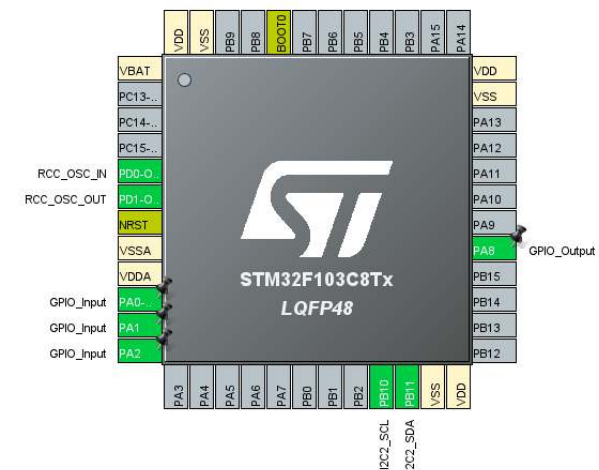



Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search



Categories A-Z

System Core

DMA
GPIO
IWDG
NVIC
RCC
SYS
WWDG

Analog

Timers

Connectivity

Computing

Middleware and Software Packs

RCC Mode and Configuration

Mode

High Speed Clock (HSE) Crystal/Ceramic Resonator
Low Speed Clock (LSE) Disable
☒ Master Clock Output

Configuration

Reset Configuration

☒ Parameter Settings ☒ User Constants ☒ NVIC Settings ☒ GPIO Settings

Configure the below parameters :

Search (Ctrl+F)

System Parameters


VDD voltage (V) 3.3 V
Prefetch Buffer Enabled
Flash Latency (WS) 2 WS (3 CPU cycle)

RCC Parameters

HSI Calibration Value 16
HSE Startup Timeout Value (ms) 100
LSE Startup Timeout Value (ms) 5000

Pinout view

System view

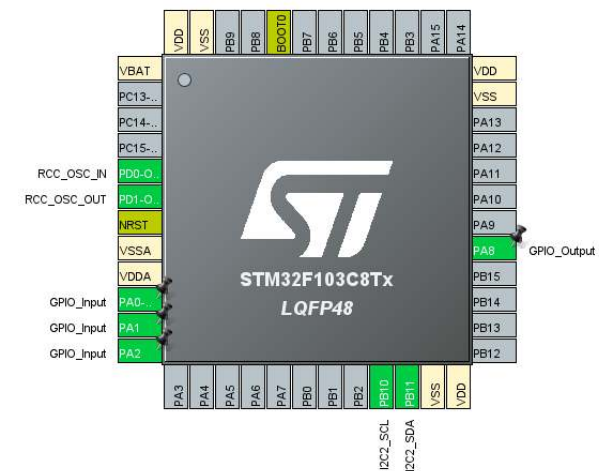



Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Search



Categories A-Z

System Core

DMA
GPIO
IWDG
NVIC
RCC
SYS
WWDG

Analog

Timers

Connectivity

Computing

Middleware and Software Packs

NVIC Mode and Configuration

Configuration



Code generation

Priority Group 4 bit...

☐ Sort by Preemption Priority and Sub Priority☐ Sort by interrupts ne

Search



Show available interrupts

☒ Force DMA channe

NVIC Interrupt Table	Enabled	Preemption Priority	
Non maskable interrupt	☒	0	0
Hard fault interrupt	☒	0	0
Memory management fault	☒	0	0
Prefetch fault, memory access fault	☒	0	0
Undefined instruction or illegal state	☒	0	0
System service call via SWI instruction	☒	0	0
Debug monitor	☒	0	0
Pendable request for system service	☒	0	0
Time base: System tick timer	☒	15	0
PVD interrupt through EXTI line 16	☐	0	0
Flash global interrupt	☐	0	0
RCC global interrupt	☐	0	0
TIM3 global interrupt	☒	0	0
I2C2 event interrupt	☐	0	0
I2C2 error interrupt	☐	0	0


☐ Enabled

Preemption Priority

Sub Priority

Pinout view

System view

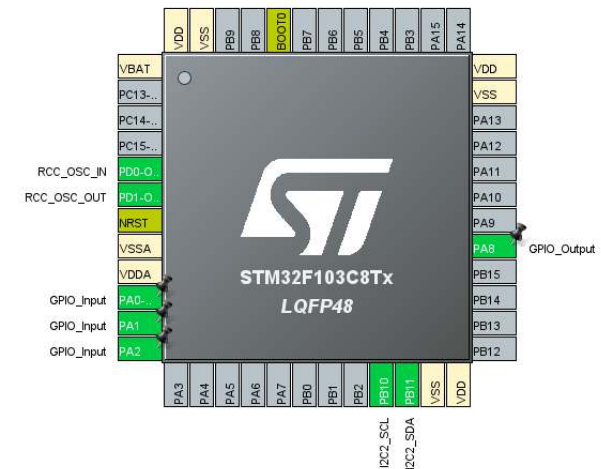



Pinout & Configuration

Clock Configuration

Project Manager

Tools

Software Packs

Pinout

Pinout view

System view

Categories A->Z

- System Core >
- Analog >
- Timers >
- Connectivity >
- Computing >
- Middleware and Software Packs >

