इंटरनेट मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

"जानने का अधिकार, जीने का अधिकार"
Mazdoor Kisan Shakti Sangathan
"The Right to Information, The Right to Live"

"पुराने को छोड नये के तरफ"
Jawaharlal Nehru
"Step Out From the Old to the New"

IS 14962-3 (2001): ISO General Purpose Metric Screw Threads - Tolerances, Part 3: Deviations for Constructional Screw Threads [PGD 20: Engineering Standards]

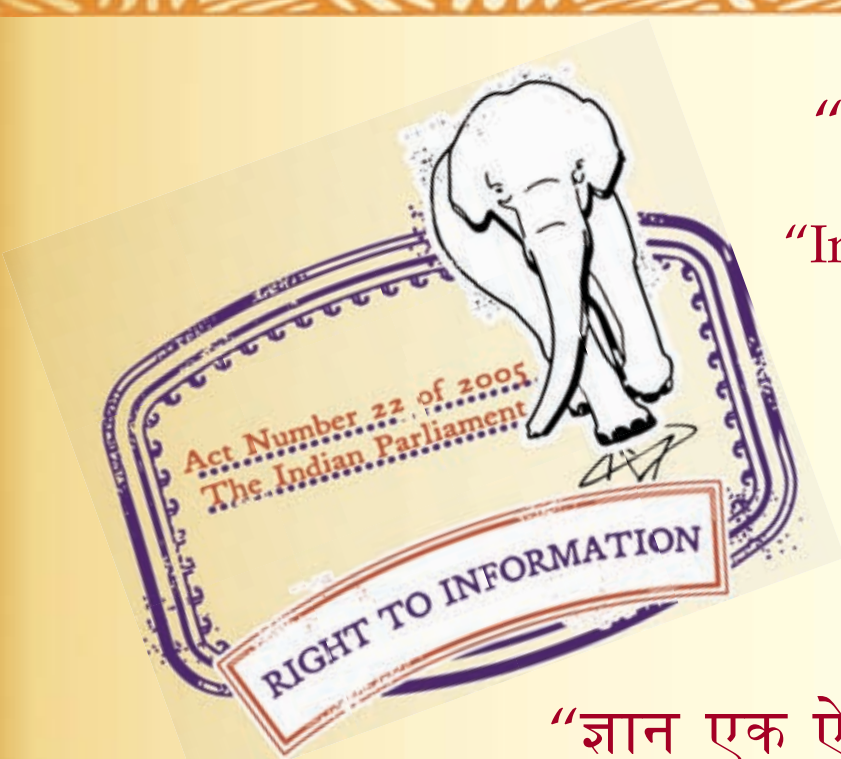

"ज्ञान से एक नये भारत का निर्माण"
Satyanarayan Gangaram Pitroda
"Invent a New India Using Knowledge"

"ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है"
Bhartṛhari—Nītiśatakam
"Knowledge is such a treasure which cannot be stolen"

BLANK PAGE

BRUTUM FULMEN

IGNORANTIA JURIS NON EXCUSAT

PROTECTED BY COPYRIGHT

IS 14962 (Part 3) : 2001
ISO 965-3 : 1998
[Superseding IS 4218 (Part 5) : 1978]

भारतीय मानक

आई० एस० ओ० सामान्य प्रयोजन की मीटरी पेंच चूडियाँ — छूटें

भाग 3 निर्माण सम्बन्धी पेंच चूड़ियों का विचलन

Indian Standard

ISO GENERAL PURPOSE METRIC SCREW THREADS — TOLERANCES

PART 3 DEVIATIONS FOR CONSTRUCTIONAL SCREW THREADS

ICS 21.040.10

© BIS 2001

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

July 2001 **Price Group 7**

NATIONAL FOREWORD

This Indian Standard (Part 3) which is identical with ISO 965-3 : 1998 'ISO general purpose metric screw threads — Tolerances — Part 3 : Deviations for constructional screw threads' issued by the International Organization for Standardization (ISO) was adopted by the Bureau of Indian Standards on the recommendation of the Engineering Standards Sectional Committee and approval of the Basic and Production Engineering Division Council.

This Committee, responsible for preparation of Indian Standards on Screw Threads, decided to revise all the six parts of IS 4218 in the following manner:

a) The revised IS 4218 to be published in four parts, that is (Parts 1 to 4) by adopting ISO 68-1 : 1998, ISO 261 : 1998, ISO 724 : 1993 and ISO 262 : 1998 respectively covering the various requirements of ISO general purpose metric screw threads except tolerances;

b) For tolerances on ISO general purpose metric screw threads a new standard, that is IS 14962 to be published in five parts, that is (Parts 1 to 5) by adopting ISO 965 (Part 1) : 1998, ISO 965 (Part 2) : 1998, ISO 965 (Part 3) : 1998, ISO 965 (Part 4) : 1998 and ISO 965 (Part 5) : 1998 respectively; and

c) After the publication of above standards IS 4218 (Part 5) : 1979 and IS 4218 (Part 6) : 1978 stand withdrawn.

The text of ISO Standard has been approved as suitable for publication as an Indian Standard without deviations. In the adopted standard, certain conventions are not identical to those used in Indian Standards. Attention is especially drawn to the following:

a) Wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'.

b) Comma (,) has been used as a decimal marker while in Indian Standards, the current practice is to use a full point (.) as the decimal marker.

In this adopted standard, reference appears to certain International Standards for which Indian Standards also exist. The corresponding Indian Standards which are to be substituted in their place are listed below along with their degree of equivalence for the editions indicated:

International Standard	*Corresponding Indian Standard*	*Degree of Equivalence*
ISO 68-1 : 1998	IS 4218 (Part 1) : 2001 ISO general purpose metric screw threads: Part 1 Basic profile (*second revision*)	Identical
ISO 261 : 1998	IS 4218 (Part 2) : 2001 ISO general purpose metric screw threads: Part 2 General plan (*second revision*)	do
ISO 965-1 : 1998	IS 14962 (Part 1) : 2001 ISO general purpose metric screw threads — Tolerances: Part 1 Principles and basic data	do
ISO 5408 : 1983	IS 10587 : 1983 Terminology for screw threads	Modified

(*Continued on third cover*)

Indian Standard

ISO GENERAL PURPOSE METRIC SCREW THREADS — TOLERANCES

PART 3 DEVIATIONS FOR CONSTRUCTIONAL SCREW THREADS

1 Scope

This part of ISO 965 specifies deviations for pitch and crest diameters for ISO general purpose metric screw threads (M) conforming to ISO 261 having basic profile according to ISO 68-1.

The deviations specified are derived from the fundamental deviations and tolerances specified in ISO 965-1.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 965. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 965 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 68-1:1998, *ISO general purpose screw threads — Basic profile — Part 1: Metric screw threads.*

ISO 261:1998, *ISO general purpose metric screw threads — General plan.*

ISO 965-1:1998, *ISO general purpose metric screw threads — Tolerances — Part 1: Principles and basic data.*

ISO 5408:1983, *Cylindrical screw threads — Vocabulary.*

3 Definitions

For the purpose of this part of ISO 965 the definitions given in ISO 5408 apply.

4 Deviations

For internal threads as well as external threads, the actual root contour shall not in any point transgress the basic profile.

The tabulated deviation values for the minor diameter of the external thread are calculated on the basis of $\frac{H}{6}$ truncation and may be used for stress calculations $\left[\text{deviation} = -\left(|es| + \frac{H}{6}\right)\right]$.

For coated threads, the tolerances apply to the parts before coating, unless otherwise stated. After coating the actual thread profile shall not in any point transgress the maximum material limits for position H or h respectively.

NOTE These provisions are intended for thin coatings, for example those obtained by electroplating.

Table 1

ES, *es* = upper deviation; *EI*, *ei* = lower deviation

Basic major diameter		Pitch	Internal thread					External thread					
			Tolerance class	Pitch diameter		Minor diameter		Tolerance class	Pitch diameter		Major diameter		Minor diameter
over	up to			*ES*	*EI*	*ES*	*EI*		*es*	*ei*	*es*	*ei*	Deviation $-\left(\lvert es\rvert+\frac{H}{6}\right)$ for stress calculation
mm	mm	mm		µm	µm	µm	µm		µm	µm	µm	µm	µm
0,99	1,4	0,2	—	—	—	—	—	3h4h	0	−24	0	−36	−29
			4H	+40	0	+38	0	4h	0	−30	0	−36	−29
			5G	—	—	—	—	5g6g	−17	−55	−17	−73	−46
			5H	—	—	—	—	5h4h	0	−38	0	−36	−29
			—	—	—	—	—	5h6h	0	−38	0	−56	−29
			—	—	—	—	—	6e	—	—	—	—	—
			—	—	—	—	—	6f	—	—	—	—	—
			6G	—	—	—	—	6g	−17	−65	−17	−73	−46
			6H	—	—	—	—	6h	0	−48	0	−56	−29
			—	—	—	—	—	7e6e	—	—	—	—	—
			7G	—	—	—	—	7g6g	—	—	—	—	—
			7H	—	—	—	—	7h6h	—	—	—	—	—
			8G	—	—	—	—	8g	—	—	—	—	—
			8H	—	—	—	—	9g8g	—	—	—	—	—
		0,25	—	—	—	—	—	3h4h	0	−26	0	−42	−36
			4H	+45	0	+45	0	4h	0	−34	0	−42	−36
			5G	+74	+18	+74	+18	5g6g	−18	−60	−18	−85	−54
			5H	+56	0	+56	0	5h4h	0	−42	0	−42	−36
			—	—	—	—	—	5h6h	0	−42	0	−67	−36
			—	—	—	—	—	6e	—	—	—	—	—
			—	—	—	—	—	6f	—	—	—	—	—
			6G	—	—	—	—	6g	−18	−71	−18	−85	−54
			6H	—	—	—	—	6h	0	−53	0	−67	−36
			—	—	—	—	—	7e6e	—	—	—	—	—
			7G	—	—	—	—	7g6g	—	—	—	—	—
			7H	—	—	—	—	7h6h	—	—	—	—	—
			8G	—	—	—	—	8g	—	—	—	—	—
			8H	—	—	—	—	9g8g	—	—	—	—	—
		0,3	—	—	—	—	—	3h4h	0	−28	0	−48	−43
			4H	+48	0	+53	0	4h	0	−36	0	−48	−43
			5G	+78	+18	+85	+18	5g6g	−18	−63	−18	−93	−61
			5H	+60	0	+67	0	5h4h	0	−45	0	−48	−43
			—	—	—	—	—	5h6h	0	−45	0	−75	−43
			—	—	—	—	—	6e	—	—	—	—	—
			—	—	—	—	—	6f	—	—	—	—	—
			6G	+93	+18	+103	+18	6g	−18	−74	−18	−93	−61
			6H	+75	0	+85	0	6h	0	−56	0	−75	−43
			—	—	—	—	—	7e6e	—	—	—	—	—
			7G	—	—	—	—	7g6g	—	—	—	—	—
			7H	—	—	—	—	7h6h	—	—	—	—	—
			8G	—	—	—	—	8g	—	—	—	—	—
			8H	—	—	—	—	9g8g	—	—	—	—	—
1,4	2,8	0,2	—	—	—	—	—	3h4h	0	−25	0	−36	−29
			4H	+42	0	+38	0	4h	0	−32	0	−36	−29
			5G	—	—	—	—	5g6g	−17	−57	−17	−73	−46
			5H	—	—	—	—	5h4h	0	−40	0	−36	−29
			—	—	—	—	—	5h6h	0	−40	0	−56	−29

(*continued*)

Table 1 (*continued*)

Basic major diameter		Pitch	Internal thread					External thread					
			Toler-ance class	Pitch diameter		Minor diameter		Toler-ance class	Pitch diameter		Major diameter		Minor diameter
over	up to			*ES*	*EI*	*ES*	*EI*		*es*	*ei*	*es*	*ei*	Deviation $-\left(\lvert es\rvert+\frac{H}{6}\right)$ for stress calculation
mm	mm	mm		µm	µm	µm	µm		µm	µm	µm	µm	µm
1,4	2,8	0,2	—	—	—	—	—	6e	—	—	—	—	—
			—	—	—	—	—	6f	– 32	– 82	– 32	– 88	– 61
			6G	—	—	—	—	6g	– 17	– 67	– 17	– 73	– 46
			6H	—	—	—	—	6h	0	– 50	0	– 56	– 29
			—	—	—	—	—	7e6e	—	—	—	—	—
			7G	—	—	—	—	7g6g	—	—	—	—	—
			7H	—	—	—	—	7h6h	—	—	—	—	—
			8G	—	—	—	—	8g	—	—	—	—	—
			8H	—	—	—	—	9g8g	—	—	—	—	—
		0,25	—	—	—	—	—	3h4h	0	– 28	0	– 42	– 36
			4H	+ 48	0	+ 45	0	4h	0	– 36	0	– 42	– 36
			5G	+ 78	+ 18	+ 74	+ 18	5g6g	– 18	– 63	– 18	– 85	– 54
			5H	+ 60	0	+ 56	0	5h4h	0	– 45	0	– 42	– 36
			—	—	—	—	—	5h6h	0	– 45	0	– 67	– 36
			—	—	—	—	—	6e	—	—	—	—	—
			—	—	—	—	—	6f	– 33	– 89	– 33	– 100	– 69
			6G	—	—	—	—	6g	– 18	– 74	– 18	– 85	– 54
			6H	—	—	—	—	6h	0	– 56	0	– 67	– 36
			—	—	—	—	—	7e6e	—	—	—	—	—
			7G	—	—	—	—	7g6g	—	—	—	—	—
			7H	—	—	—	—	7h6h	—	—	—	—	—
			8G	—	—	—	—	8g	—	—	—	—	—
			8H	—	—	—	—	9g8g	—	—	—	—	—
		0,35	—	—	—	—	—	3h4h	0	– 32	0	– 53	– 51
			4H	+ 53	0	+ 63	0	4h	0	– 40	0	– 53	– 51
			5G	+ 86	+ 19	+ 99	+ 19	5g6g	– 19	– 69	– 19	– 104	– 70
			5H	+ 67	0	+ 80	0	5h4h	0	– 50	0	– 53	– 51
			—	—	—	—	—	5h6h	0	– 50	0	– 85	– 51
			—	—	—	—	—	6e	—	—	—	—	—
			—	—	—	—	—	6f	– 34	– 97	– 34	– 119	– 85
			6G	+ 104	+ 19	+ 119	+ 19	6g	– 19	– 82	– 19	– 104	– 70
			6H	+ 85	0	+ 100	0	6h	0	– 63	0	– 85	– 51
			—	—	—	—	—	7e6e	—	—	—	—	—
			7G	—	—	—	—	7g6g	– 19	– 99	– 19	– 104	– 70
			7H	—	—	—	—	7h6h	0	– 80	0	– 85	– 51
			8G	—	—	—	—	8g	—	—	—	—	—
			8H	—	—	—	—	9g8g	—	—	—	—	—
		0,4	—	—	—	—	—	3h4h	0	– 34	0	– 60	– 58
			4H	+ 56	0	+ 71	0	4h	0	– 42	0	– 60	– 58
			5G	+ 90	+ 19	+ 109	+ 19	5g6g	– 19	– 72	– 19	– 114	– 77
			5H	+ 71	0	+ 90	0	5h4h	0	– 53	0	– 60	– 58
			—	—	—	—	—	5h6h	0	– 53	0	– 95	– 58
			—	—	—	—	—	6e	—	—	—	—	—
			—	—	—	—	—	6f	– 34	– 101	– 34	– 129	– 92
			6G	+ 109	+ 19	+ 131	+ 19	6g	– 19	– 86	– 19	– 114	– 77
			6H	+ 90	0	+ 112	0	6h	0	– 67	0	– 95	– 58
			—	—	—	—	—	7e6e	—	—	—	—	—

(*continued*)

Table 1 (*continued*)

Basic major diameter		Pitch	Internal thread					External thread					
over	up to		Tolerance class	Pitch diameter		Minor diameter		Tolerance class	Pitch diameter		Major diameter		Minor diameter
				ES	*EI*	*ES*	*EI*		*es*	*ei*	*es*	*ei*	Deviation $-\left(\lvert es\rvert + \frac{H}{6}\right)$ for stress calculation
mm	mm	mm		µm	µm	µm	µm		µm	µm	µm	µm	µm
1,4	**2,8**	**0,4**	7G	—	—	—	—	7g6g	− 19	− 104	− 19	− 114	− 77
			7H	—	—	—	—	7h6h	0	− 85	0	− 95	− 58
			8G	—	—	—	—	8g	—	—	—	—	—
			8H	—	—	—	—	9g8g	—	—	—	—	—
		0,45	—	—	—	—	—	3h4h	0	− 36	0	− 63	− 65
			4H	+ 60	0	+ 80	0	4h	0	− 45	0	− 63	− 65
			5G	+ 95	+ 20	+ 120	+ 20	5g6g	− 20	− 76	− 20	− 120	− 85
			5H	+ 75	0	+ 100	0	5h4h	0	− 56	0	− 63	− 65
			—	—	—	—	—	5h6h	0	− 56	0	− 100	− 65
			—	—	—	—	—	6e	—	—	—	—	—
			—	—	—	—	—	6f	− 35	− 106	− 35	− 135	− 100
			6G	+ 115	+ 20	+ 145	+ 20	6g	− 20	− 91	− 20	− 120	− 85
			6H	+ 95	0	+ 125	0	6h	0	− 71	0	− 100	− 65
			—	—	—	—	—	7e6e	—	—	—	—	—
			7G	—	—	—	—	7g6g	− 20	− 110	− 20	− 120	− 85
			7H	—	—	—	—	7h6h	0	− 90	0	− 100	− 65
			8G	—	—	—	—	8g	—	—	—	—	—
			8H	—	—	—	—	9g8g	—	—	—	—	—
2,8	**5,6**	**0,35**	—	—	—	—	—	3h4h	0	− 34	0	− 53	− 51
			4H	+ 56	0	+ 63	0	4h	0	− 42	0	− 53	− 51
			5G	+ 90	+ 19	+ 99	+ 19	5g6g	− 19	− 72	− 19	− 104	− 70
			5H	+ 71	0	+ 80	0	5h4h	0	− 53	0	− 53	− 51
			—	—	—	—	—	5h6h	0	− 53	0	− 85	− 51
			—	—	—	—	—	6e	—	—	—	—	—
			—	—	—	—	—	6f	− 34	− 101	− 34	− 119	− 85
			6G	+ 109	+ 19	+ 119	+ 19	6g	− 19	− 86	− 19	− 104	− 70
			6H	+ 90	0	+ 100	0	6h	0	− 67	0	− 85	− 51
			—	—	—	—	—	7e6e	—	—	—	—	—
			7G	—	—	—	—	7g6g	− 19	− 104	− 19	− 104	− 70
			7H	—	—	—	—	7h6h	0	− 85	0	− 85	− 51
			8G	—	—	—	—	8g	—	—	—	—	—
			8H	—	—	—	—	9g8g	—	—	—	—	—
		0,5	—	—	—	—	—	3h4h	0	− 38	0	− 67	− 72
			4H	+ 63	0	+ 90	0	4h	0	− 48	0	− 67	− 72
			5G	+ 100	+ 20	+ 132	+ 20	5g6g	− 20	− 80	− 20	− 126	− 92
			5H	+ 80	0	+ 112	0	5h4h	0	− 60	0	− 67	− 72
			—	—	—	—	—	5h6h	0	− 60	0	− 106	− 72
			—	—	—	—	—	6e	− 50	− 125	− 50	− 156	− 122
			—	—	—	—	—	6f	− 36	− 111	− 36	− 142	− 108
			6G	+ 120	+ 20	+ 160	+ 20	6g	− 20	− 95	− 20	− 126	− 92
			6H	+ 100	0	+ 140	0	6h	0	− 75	0	− 106	− 72
			—	—	—	—	—	7e6e	− 50	− 145	− 50	− 156	− 122
			7G	+ 145	+ 20	+ 200	+ 20	7g6g	− 20	− 115	− 20	− 126	− 92
			7H	+ 125	0	+ 180	0	7h6h	0	− 95	0	− 106	− 72
			8G	—	—	—	—	8g	—	—	—	—	—
			8H	—	—	—	—	9g8g	—	—	—	—	—

(*continued*)

Table 1 (*continued*)

Basic major diameter		Pitch	Internal thread					External thread					
			Toler-ance class	Pitch diameter		Minor diameter		Toler-ance class	Pitch diameter		Major diameter		Minor diameter
over	up to			*ES*	*EI*	*ES*	*EI*		*es*	*ei*	*es*	*ei*	Deviation $-\left(\lvert es \rvert + \frac{H}{6}\right)$ for stress calculation
mm	mm	mm		µm	µm	µm	µm		µm	µm	µm	µm	µm
2,8	5,6	0,6	—	—	—	—	—	3h4h	0	− 42	0	− 80	− 87
			4h	+ 71	0	+ 100	0	4h	0	− 53	0	− 80	− 87
			5G	+ 111	+ 21	+ 146	+ 21	5g6g	− 21	− 88	− 21	− 146	− 108
			5H	+ 90	0	+ 125	0	5h4h	0	− 67	0	− 80	− 87
			—	—	—	—	—	5h6h	0	− 67	0	− 125	− 87
			—	—	—	—	—	6e	− 53	− 138	− 53	− 178	− 140
			—	—	—	—	—	6f	− 36	− 121	− 36	− 161	− 123
			6G	+ 133	+ 21	+ 181	+ 21	6g	− 21	− 106	− 21	− 146	− 108
			6H	+ 112	0	+ 160	0	6h	0	− 85	0	− 125	− 87
			—	—	—	—	—	7e6e	− 53	− 159	− 53	− 178	− 140
			7G	+ 161	+ 21	+ 221	+ 21	7g6g	− 21	− 127	− 21	− 146	− 108
			7H	+ 140	0	+ 200	0	7h6h	0	− 106	0	− 125	− 87
			8G	—	—	—	—	8g	—	—	—	—	—
			8H	—	—	—	—	9g8g	—	—	—	—	—
		0,7	—	—	—	—	—	3h4h	0	− 45	0	− 90	− 101
			4H	+ 75	0	+ 112	0	4h	0	− 56	0	− 90	− 101
			5G	+ 117	+ 22	+ 162	+ 22	5g6g	− 22	− 93	− 22	− 162	− 123
			5H	+ 95	0	+ 140	0	5h4h	0	− 71	0	− 90	− 101
			—	—	—	—	—	5h6h	0	− 71	0	− 140	− 101
			—	—	—	—	—	6e	− 56	− 146	− 56	− 196	− 157
			—	—	—	—	—	6f	− 38	− 128	− 38	− 178	− 139
			6G	+ 140	+ 22	+ 202	+ 22	6g	− 22	− 112	− 22	− 162	− 123
			6H	+ 118	0	+ 180	0	6h	0	− 90	0	− 140	− 101
			—	—	—	—	—	7e6e	− 56	− 168	− 56	− 196	− 157
			7G	+ 172	+ 22	+ 246	+ 22	7g6g	− 22	− 134	− 22	− 162	− 123
			7H	+ 150	0	+ 224	0	7h6h	0	− 112	0	− 140	− 101
			8G	—	—	—	—	8g	—	—	—	—	—
			8H	—	—	—	—	9g8g	—	—	—	—	—
		0,75	—	—	—	—	—	3h4h	0	− 45	0	− 90	− 108
			4H	+ 75	0	+ 118	0	4h	0	− 56	0	− 90	− 108
			5G	+ 117	+ 22	+ 172	+ 22	5g6g	− 22	− 93	− 22	− 162	− 130
			5H	+ 95	0	+ 150	0	5h4h	0	− 71	0	− 90	− 108
			—	—	—	—	—	5h6h	0	− 71	0	− 140	− 108
			—	—	—	—	—	6e	− 56	− 146	− 56	− 196	− 164
			—	—	—	—	—	6f	− 38	− 128	− 38	− 178	− 146
			6G	+ 140	+ 22	+ 212	+ 22	6g	− 22	− 112	− 22	− 162	− 130
			6H	+ 118	0	+ 190	0	6h	0	− 90	0	− 140	− 108
			—	—	—	—	—	7e6e	− 56	− 168	− 56	− 196	− 164
			7G	+ 172	+ 22	+ 258	+ 22	7g6g	− 22	− 134	− 22	− 162	− 130
			7H	+ 150	0	+ 236	0	7h6h	0	− 112	0	− 140	− 108
			8G	—	—	—	—	8g	—	—	—	—	—
			8H	—	—	—	—	9g8g	—	—	—	—	—
		0,8	—	—	—	—	—	3h4h	0	− 48	0	− 95	− 115
			4H	+ 80	0	+ 125	0	4h	0	− 60	0	− 95	− 115
			5G	+ 124	+ 24	+ 184	+ 24	5g6g	− 24	− 99	− 24	− 174	− 140
			5H	+ 100	0	+ 160	0	5h4h	0	− 75	0	− 95	− 115
			—	—	—	—	—	5h6h	0	− 75	0	− 150	− 115

(*continued*)

Table 1 (*continued*)

Basic major diameter		Pitch	Internal thread					External thread					
			Toler-ance class	Pitch diameter		Minor diameter		Toler-ance class	Pitch diameter		Major diameter		Minor diameter
over	up to			*ES*	*EI*	*ES*	*EI*		*es*	*ei*	*es*	*ei*	Deviation $-\left(\lvert es \rvert + \frac{H}{6}\right)$ for stress calculation
mm	mm	mm		µm	µm	µm	µm		µm	µm	µm	µm	µm
2,8	**5,6**	**0,8**	—	—	—	—	—	6e	−60	−155	−60	−210	−176
			—	—	—	—	—	6f	−38	−133	−38	−188	−153
			6G	+149	+24	+224	+24	6g	−24	−119	−24	−174	−140
			6H	+125	0	+200	0	6h	0	−95	0	−150	−115
			—	—	—	—	—	7e6e	−60	−178	−60	−210	−176
			7G	+184	+24	+274	+24	7g6g	−24	−142	−24	−174	−140
			7H	+160	0	+250	0	7h6h	0	−118	0	−150	−115
			8G	+224	+24	+339	+24	8g	−24	−174	−24	−260	−140
			8H	+200	0	+315	0	9g8g	−24	−214	−24	−260	−140
5,6	**11,2**	**0,75**	—	—	—	—	—	3h4h	0	−50	0	−90	−108
			4H	+85	0	+118	0	4h	0	−63	0	−90	−108
			5G	+128	+22	+172	+22	5g6g	−22	−102	−22	−162	−130
			5H	+106	0	+150	0	5h4h	0	−80	0	−90	−108
			—	—	—	—	—	5h6h	0	−80	0	−140	−108
			—	—	—	—	—	6e	−56	−156	−56	−196	−164
			—	—	—	—	—	6f	−38	−138	−38	−178	−146
			6G	+154	+22	+212	+22	6g	−22	−122	−22	−162	−130
			6H	+132	0	+190	0	6h	0	−100	0	−140	−108
			—	—	—	—	—	7e6e	−56	−181	−56	−196	−164
			7G	+192	+22	+258	+22	7g6g	−22	−147	−22	−162	−130
			7H	+170	0	+236	0	7h6h	0	−125	0	−140	−108
			8G	—	—	—	—	8g	–	–	–	–	–
			8H	—	—	—	—	9g8g	–	–	–	–	–
		1	—	—	—	—	—	3h4h	0	−56	0	−112	−144
			4H	+95	0	+150	0	4h	0	−71	0	−112	−144
			5G	+144	+26	+216	+26	5g6g	−26	−116	−26	−206	−170
			5H	+118	0	+190	0	5h4h	0	−90	0	−112	−144
			—	—	—	—	—	5h6h	0	−90	0	−180	−144
			—	—	—	—	—	6e	−60	−172	−60	−240	−204
			—	—	—	—	—	6f	−40	−152	−40	−220	−184
			6G	+176	+26	+262	+26	6g	−26	−138	−26	−206	−170
			6H	+150	0	+236	0	6h	0	−112	0	−180	−144
			—	—	—	—	—	7e6e	−60	−200	−60	−240	−204
			7G	+216	+26	+326	+26	7g6g	−26	−166	−26	−206	−170
			7H	+190	0	+300	0	7h6h	0	−140	0	−180	−144
			8G	+262	+26	+401	+26	8g	−26	−206	−26	−306	−170
			8H	+236	0	+375	0	9g8g	−26	−250	−26	−306	−170
		1,25	—	—	—	—	—	3h4h	0	−60	0	−132	−180
			4H	+100	0	+170	0	4h	0	−75	0	−132	−180
			5G	+153	+28	+240	+28	5g6g	−28	−123	−28	−240	−208
			5H	+125	0	+212	0	5h4h	0	−95	0	−132	−180
			—	—	—	—	—	5h6h	0	−95	0	−212	−180
			—	—	—	—	—	6e	−63	−181	−63	−275	−243
			—	—	—	—	—	6f	−42	−160	−42	−254	−222
			6G	+188	+28	+293	+28	6g	−28	−146	−28	−240	−208
			6H	+160	0	+265	0	6h	0	−118	0	−212	−180

(*continued*)

Table 1 (*continued*)

Basic major diameter		Pitch	Internal thread					External thread					
			Toler-ance class	Pitch diameter		Minor diameter		Toler-ance class	Pitch diameter		Major diameter		Minor diameter
over	up to			*ES*	*EI*	*ES*	*EI*		*es*	*ei*	*es*	*ei*	Deviation $-\left(\lvert es\rvert + \frac{H}{6}\right)$ for stress calculation
mm	mm	mm		µm	µm	µm	µm		µm	µm	µm	µm	µm
5,6	**11,2**	**1,25**	—	—	—	—	—	7e6e	− 63	− 213	− 63	− 275	− 243
			7G	+ 228	+ 28	+ 363	+ 28	7g6g	− 28	− 178	− 28	− 240	− 208
			7H	+ 200	0	+ 335	0	7h6h	0	− 150	0	− 212	− 180
			8G	+ 278	+ 28	+ 453	+ 28	8g	− 28	− 218	− 28	− 363	− 208
			8H	+ 250	0	+ 425	0	9g8g	− 28	− 264	− 28	− 363	− 208
		1,5	—	—	—	—	—	3h4h	0	− 67	0	− 150	− 217
			4H	+ 112	0	+ 190	0	4h	0	− 85	0	− 150	− 217
			5G	+ 172	+ 32	+ 268	+ 32	5g6g	− 32	− 138	− 32	− 268	− 249
			5H	+ 140	0	+ 236	0	5h4h	0	− 106	0	− 150	− 217
			—	—	—	—	—	5h6h	0	− 106	0	− 236	− 217
			—	—	—	—	—	6e	− 67	− 199	− 67	− 303	− 284
			—	—	—	—	—	6f	− 45	− 177	− 45	− 281	− 262
			6G	+ 212	+ 32	+ 332	+ 32	6g	− 32	− 164	− 32	− 268	− 249
			6H	+ 180	0	+ 300	0	6h	0	− 132	0	− 236	− 217
			—	—	—	—	—	7e6e	− 67	− 237	− 67	− 303	− 284
			7G	+ 256	+ 32	+ 407	+ 32	7g6g	− 32	− 202	− 32	− 268	− 249
			7H	+ 224	0	+ 375	0	7h6h	0	− 170	0	− 236	− 217
			8G	+ 312	+ 32	+ 507	+ 32	8g	− 32	− 244	− 32	− 407	− 249
			8H	+ 280	0	+ 475	0	9g8g	− 32	− 297	− 32	− 407	− 249
11,2	**22,4**	**1**	—	—	—	—	—	3h4h	0	− 60	0	− 112	− 144
			4H	+ 100	0	+ 150	0	4h	0	− 75	0	− 112	− 144
			5G	+ 151	+ 26	+ 216	+ 26	5g6g	− 26	− 121	− 26	− 206	− 170
			5H	+ 125	0	+ 190	0	5h4h	0	− 95	0	− 112	− 144
			—	—	—	—	—	5h6h	0	− 95	0	− 180	− 144
			—	—	—	—	—	6e	− 60	− 178	− 60	− 240	− 204
			—	—	—	—	—	6f	− 40	− 158	− 40	− 220	− 184
			6G	+ 186	+ 26	+ 262	+ 26	6g	− 26	− 144	− 26	− 206	− 170
			6H	+ 160	0	+ 236	0	6h	0	− 118	0	− 180	− 144
			—	—	—	—	—	7e6e	− 60	− 210	− 60	− 240	− 204
			7G	+ 226	+ 26	+ 326	+ 26	7g6g	− 26	− 176	− 26	− 206	− 170
			7H	+ 200	0	+ 300	0	7h6h	0	− 150	0	− 180	− 144
			8G	+ 276	+ 26	+ 401	+ 26	8g	− 26	− 216	− 26	− 306	− 170
			8H	+ 250	0	+ 375	0	9g8g	− 26	− 262	− 26	− 306	− 170
		1,25	—	—	—	—	—	3h4h	0	− 67	0	− 132	− 180
			4H	+ 112	0	+ 170	0	4h	0	− 85	0	− 132	− 180
			5G	+ 168	+ 28	+ 240	+ 28	5g6g	− 28	− 134	− 28	− 240	− 208
			5H	+ 140	0	+ 212	0	5h4h	0	− 106	0	− 132	− 180
			—	—	—	—	—	5h6h	0	− 106	0	− 212	− 180
			—	—	—	—	—	6e	− 63	− 195	− 63	− 275	− 243
			—	—	—	—	—	6f	− 42	− 174	− 42	− 254	− 222
			6G	+ 208	+ 28	+ 293	+ 28	6g	− 28	− 160	− 28	− 240	− 208
			6H	+ 180	0	+ 265	0	6h	0	− 132	0	− 212	− 180
			—	—	—	—	—	7e6e	− 63	− 233	− 63	− 275	− 243
			7G	+ 252	+ 28	+ 363	+ 28	7g6g	− 28	− 198	− 28	− 240	− 208
			7H	+ 224	0	+ 335	0	7h6h	0	− 170	0	− 212	− 180
			8G	+ 308	+ 28	+ 453	+ 28	8g	− 28	− 240	− 28	− 363	− 208

(*continued*)

Table 1 (*continued*)

Basic major diameter		Pitch	Internal thread					External thread					
			Toler-ance class	Pitch diameter		Minor diameter		Toler-ance class	Pitch diameter		Major diameter		Minor diameter
over	up to			*ES*	*EI*	*ES*	*EI*		*es*	*ei*	*es*	*ei*	Deviation $-\left(\lvert es\rvert+\frac{H}{6}\right)$ for stress calculation
mm	mm	mm		µm	µm	µm	µm		µm	µm	µm	µm	µm
11,2	22,4	1,25	8H	+ 280	0	+ 425	0	9g8g	– 28	– 293	– 28	– 363	– 208
		1,5	—	—	—	—	—	3h4h	0	– 71	0	– 150	– 217
			4H	+ 118	0	+ 190	0	4h	0	– 90	0	– 150	– 217
			5G	+ 182	+ 32	+ 268	+ 32	5g6g	– 32	– 144	– 32	– 268	– 249
			5H	+ 150	0	+ 236	0	5h4h	0	– 112	0	– 150	– 217
			—	—	—	—	—	5h6h	0	– 112	0	– 236	– 217
			—	—	—	—	—	6e	– 67	– 207	– 67	– 303	– 284
			—	—	—	—	—	6f	– 45	– 185	– 45	– 281	– 262
			6G	+ 222	+ 32	+ 332	+ 32	6g	– 32	– 172	– 32	– 268	– 249
			6H	+ 190	0	+ 300	0	6h	0	– 140	0	– 236	– 217
			—	—	—	—	—	7e6e	– 67	– 247	– 67	– 303	– 284
			7G	+ 268	+ 32	+ 407	+ 32	7g6g	– 32	– 212	– 32	– 268	– 249
			7H	+ 236	0	+ 375	0	7h6h	0	– 180	0	– 236	– 217
			8G	+ 332	+ 32	+ 507	+ 32	8g	– 32	– 256	– 32	– 407	– 249
			8H	+ 300	0	+ 475	0	9g8g	– 32	– 312	– 32	– 407	– 249
		1,75	—	—	—	—	—	3h4h	0	– 75	0	– 170	– 253
			4H	+ 125	0	+ 212	0	4h	0	– 95	0	– 170	– 253
			5G	+ 194	+ 34	+ 299	+ 34	5g6g	– 34	– 152	– 34	– 299	– 287
			5H	+ 160	0	+ 265	0	5h4h	0	– 118	0	– 170	– 253
			—	—	—	—	—	5h6h	0	– 118	0	– 265	– 253
			—	—	—	—	—	6e	– 71	– 221	– 71	– 336	– 324
			—	—	—	—	—	6f	– 48	– 198	– 48	– 313	– 301
			6G	+ 234	+ 34	+ 369	+ 34	6g	– 34	– 184	– 34	– 299	– 287
			6H	+ 200	0	+ 335	0	6h	0	– 150	0	– 265	– 253
			—	—	—	—	—	7e6e	– 71	– 261	– 71	– 336	– 324
			7G	+ 284	+ 34	+ 459	+ 34	7g6g	– 34	– 224	– 34	– 299	– 287
			7H	+ 250	0	+ 425	0	7h6h	0	– 190	0	– 265	– 253
			8G	+ 349	+ 34	+ 564	+ 34	8g	– 34	– 270	– 34	– 459	– 287
			8H	+ 315	0	+ 530	0	9g8g	– 34	– 334	– 34	– 459	– 287
		2	—	—	—	—	—	3h4h	0	– 80	0	– 180	– 289
			4H	+ 132	0	+ 236	0	4h	0	– 100	0	– 180	– 289
			5G	+ 208	+ 38	+ 338	+ 38	5g6g	– 38	– 163	– 38	– 318	– 327
			5H	+ 170	0	+ 300	0	5h4h	0	– 125	0	– 180	– 289
			—	—	—	—	—	5h6h	0	– 125	0	– 280	– 289
			—	—	—	—	—	6e	– 71	– 231	– 71	– 351	– 360
			—	—	—	—	—	6f	– 52	– 212	– 52	– 332	– 341
			6G	+ 250	+ 38	+ 413	+ 38	6g	– 38	– 198	– 38	– 318	– 327
			6H	+ 212	0	+ 375	0	6h	0	– 160	0	– 280	– 289
			—	—	—	—	—	7e6e	– 71	– 271	– 71	– 351	– 360
			7G	+ 303	+ 38	+ 513	+ 38	7g6g	– 38	– 238	– 38	– 318	– 327
			7H	+ 265	0	+ 475	0	7h6h	0	– 200	0	– 280	– 289
			8G	+ 373	+ 38	+ 638	+ 38	8g	– 38	– 288	– 38	– 488	– 327

(*continued*)

Table 1 (*continued*)

Basic major diameter		Pitch	Internal thread					External thread					
			Toler-ance class	Pitch diameter		Minor diameter		Toler-ance class	Pitch diameter		Major diameter		Minor diameter
over	up to			*ES*	*EI*	*ES*	*EI*		*es*	*ei*	*es*	*ei*	Deviation $-\left(\lvert es\rvert+\frac{H}{6}\right)$ for stress calculation
mm	mm	mm		µm	µm	µm	µm		µm	µm	µm	µm	µm
11,2	22,4	2	8H	+ 335	0	+ 600	0	9g8g	− 38	− 353	− 38	− 488	− 327
		2,5	—	—	—	—	—	3h4h	0	− 85	0	− 212	− 361
			4H	+ 140	0	+ 280	0	4h	0	− 106	0	− 212	− 361
			5G	+ 222	+ 42	+ 397	+ 42	5g6g	− 42	− 174	− 42	− 377	− 403
			5H	+ 180	0	+ 355	0	5h4h	0	− 132	0	− 212	− 361
			—	—	—	—	—	5h6h	0	− 132	0	− 335	− 361
			—	—	—	—	—	6e	− 80	− 250	− 80	− 415	− 441
			—	—	—	—	—	6f	− 58	− 228	− 58	− 393	− 419
			6G	+ 266	+ 42	+ 492	+ 42	6g	− 42	− 212	− 42	− 377	− 403
			6H	+ 224	0	+ 450	0	6h	0	− 170	0	− 335	− 361
			—	—	—	—	—	7e6e	− 80	− 292	− 80	− 415	− 441
			7G	+ 322	+ 42	+ 602	+ 42	7g6g	− 42	− 254	− 42	− 377	− 403
			7H	+ 280	0	+ 560	0	7h6h	0	− 212	0	− 335	− 361
			8G	+ 397	+ 42	+ 752	+ 42	8g	− 42	− 307	− 42	− 572	− 403
			8H	+ 355	0	+ 710	0	9g8g	− 42	− 377	− 42	− 572	− 403
22,4	45	1	—	—	—	—	—	3h4h	0	− 63	0	− 112	− 144
			4H	+ 106	0	+ 150	0	4h	0	− 80	0	− 112	− 144
			5G	+ 158	+ 26	+ 216	+ 26	5g6g	− 26	− 126	− 26	− 206	− 170
			5H	+ 132	0	+ 190	0	5h4h	0	− 100	0	− 112	− 144
			—	—	—	—	—	5h6h	0	− 100	0	− 180	− 144
			—	—	—	—	—	6e	− 60	− 185	− 60	− 240	− 204
			—	—	—	—	—	6f	− 40	− 165	− 40	− 220	− 184
			6G	+ 196	+ 26	+ 262	+ 26	6g	− 26	− 151	− 26	− 206	− 170
			6H	+ 170	0	+ 236	0	6h	0	− 125	0	− 180	− 144
			—	—	—	—	—	7e6e	− 60	− 220	− 60	− 240	− 204
			7G	+ 238	+ 26	+ 326	+ 26	7g6g	− 26	− 186	− 26	− 206	− 170
			7H	+ 212	0	+ 300	0	7h6h	0	− 160	0	− 180	− 144
			8G	—	—	—	—	8g	− 26	− 226	− 26	− 306	− 170
			8H	—	—	—	—	9g8g	− 26	− 276	− 26	− 306	− 170
		1,5	—	—	—	—	—	3h4h	0	− 75	0	− 150	− 217
			4H	+ 125	0	+ 190	0	4h	0	− 95	0	− 150	− 217
			5G	+ 192	+ 32	+ 268	+ 32	5g6g	− 32	− 150	− 32	− 268	− 249
			5H	+ 160	0	+ 236	0	5h4h	0	− 118	0	− 150	− 217
			—	—	—	—	—	5h6h	0	− 118	0	− 236	− 217
			—	—	—	—	—	6e	− 67	− 217	− 67	− 303	− 284
			—	—	—	—	—	6f	− 45	− 195	− 45	− 281	− 262
			6G	+ 232	+ 32	+ 332	+ 32	6g	− 32	− 182	− 32	− 268	− 249
			6H	+ 200	0	+ 300	0	6h	0	− 150	0	− 236	− 217
			—	—	—	—	—	7e6e	− 67	− 257	− 67	− 303	− 284
			7G	+ 282	+ 32	+ 407	+ 32	7g6g	− 32	− 222	− 32	− 268	− 249
			7H	+ 250	0	+ 375	0	7h6h	0	− 190	0	− 236	− 217
			8G	+ 347	+ 32	+ 507	+ 32	8g	− 32	− 268	− 32	− 407	− 249
			8H	+ 315	0	+ 475	0	9g8g	− 32	− 332	− 32	− 407	− 249
		2	—	—	—	—	—	3h4h	0	− 85	0	− 180	− 289
			4H	+ 140	0	+ 236	0	4h	0	− 106	0	− 180	− 289
			5G	+ 218	+ 38	+ 338	+ 38	5g6g	− 38	− 170	− 38	− 318	− 327

(*continued*)

Table 1 (*continued*)

Basic major diameter		Pitch	Internal thread					External thread					
			Tolerance class	Pitch diameter		Minor diameter		Tolerance class	Pitch diameter		Major diameter		Minor diameter
over	up to			*ES*	*EI*	*ES*	*EI*		*es*	*ei*	*es*	*ei*	Deviation $-\left(\lvert es\rvert+\frac{H}{6}\right)$ for stress calculation
mm	mm	mm		µm	µm	µm	µm		µm	µm	µm	µm	µm
22,4	**45**	**2**	5H	+ 180	0	+ 300	0	5h4h	0	− 132	0	− 180	− 289
			—	—	—	—	—	5h6h	0	− 132	0	− 280	− 289
			—	—	—	—	—	6e	− 71	− 241	− 71	− 351	− 360
			—	—	—	—	—	6f	− 52	− 222	− 52	− 332	− 341
			6G	+ 262	+ 38	+ 413	+ 38	6g	− 38	− 208	− 38	− 318	− 327
			6H	+ 224	0	+ 375	0	6h	0	− 170	0	− 280	− 289
			—	—	—	—	—	7e6e	− 71	− 283	− 71	− 351	− 360
			7G	+ 318	+ 38	+ 513	+ 38	7g6g	− 38	− 250	− 38	− 318	− 327
			7H	+ 280	0	+ 475	0	7h6h	0	− 212	0	− 280	− 289
			8G	+ 393	+ 38	+ 638	+ 38	8g	− 38	− 307	− 38	− 488	− 327
			8H	+ 355	0	+ 600	0	9g8g	− 38	− 373	− 38	− 488	− 327
		3	—	—	—	—	—	3h4h	0	− 100	0	− 236	− 433
			4H	+ 170	0	+ 315	0	4h	0	− 125	0	− 236	− 433
			5G	+ 260	+ 48	+ 448	+ 48	5g6g	− 48	− 208	− 48	− 423	− 481
			5H	+ 212	0	+ 400	0	5h4h	0	− 160	0	− 236	− 433
			—	—	—	—	—	5h6h	0	− 160	0	− 375	− 433
			—	—	—	—	—	6e	− 85	− 285	− 85	− 460	− 518
			—	—	—	—	—	6f	− 63	− 263	− 63	− 438	− 496
			6G	+ 313	+ 48	+ 548	+ 48	6g	− 48	− 248	− 48	− 423	− 481
			6H	+ 265	0	+ 500	0	6h	0	− 200	0	− 375	− 433
			—	—	—	—	—	7e6e	− 85	− 335	− 85	− 460	− 518
			7G	+ 383	+ 48	+ 678	+ 48	7g6g	− 48	− 298	− 48	− 423	− 481
			7H	+ 335	0	+ 630	0	7h6h	0	− 250	0	− 375	− 433
			8G	+ 473	+ 48	+ 848	+ 48	8g	− 48	− 363	− 48	− 648	− 481
			8H	+ 425	0	+ 800	0	9g8g	− 48	− 448	− 48	− 648	− 481
		3,5	—	—	—	—	—	3h4h	0	− 106	0	− 265	− 505
			4H	+ 180	0	+ 355	0	4h	0	− 132	0	− 265	− 505
			5G	+ 277	+ 53	+ 503	+ 53	5g6g	− 53	− 223	− 53	− 478	− 558
			5H	+ 224	0	+ 450	0	5h4h	0	− 170	0	− 265	− 505
			—	—	—	—	—	5h6h	0	− 170	0	− 425	− 505
			—	—	—	—	—	6e	− 90	− 302	− 90	− 515	− 595
			—	—	—	—	—	6f	− 70	− 282	− 70	− 495	− 575
			6G	+ 333	+ 53	+ 613	+ 53	6g	− 53	− 265	− 53	− 478	− 558
			6H	+ 280	0	+ 560	0	6h	0	− 212	0	− 425	− 505
			—	—	—	—	—	7e6e	− 90	− 355	− 90	− 515	− 595
			7G	+ 408	+ 53	+ 763	+ 53	7g6g	− 53	− 318	− 53	− 478	− 558
			7H	+ 355	0	+ 710	0	7h6h	0	− 265	0	− 425	− 505
			8G	+ 503	+ 53	+ 953	+ 53	8g	− 53	− 388	− 53	− 723	− 558
			8H	+ 450	0	+ 900	0	9g8g	− 53	− 478	− 53	− 723	− 558
		4	—	—	—	—	—	3h4h	0	− 112	0	− 300	− 577
			4H	+ 190	0	+ 375	0	4h	0	− 140	0	− 300	− 577
			5G	+ 296	+ 60	+ 535	+ 60	5g6g	− 60	− 240	− 60	− 535	− 637
			5H	+ 236	0	+ 475	0	5h4h	0	− 180	0	− 300	− 577
			—	—	—	—	—	5h6h	0	− 180	0	− 475	− 577
			—	—	—	—	—	6e	− 95	− 319	− 95	− 570	− 672
			—	—	—	—	—	6f	− 75	− 299	− 75	− 550	− 652

(*continued*)

Table 1 (*continued*)

Basic major diameter		Pitch	Internal thread					External thread					
			Tolerance class	Pitch diameter		Minor diameter		Tolerance class	Pitch diameter		Major diameter		Minor diameter
over	up to			*ES*	*EI*	*ES*	*EI*		*es*	*ei*	*es*	*ei*	Deviation $-\left(\lvert es\rvert+\frac{H}{6}\right)$ for stress calculation
mm	mm	mm		µm	µm	µm	µm		µm	µm	µm	µm	µm
22,4	**45**	**4**	6G	+ 360	+ 60	+ 660	+ 60	6g	– 60	– 284	– 60	– 535	– 637
			6H	+ 300	0	+ 600	0	6h	0	– 224	0	– 475	– 577
			—	—	—	—	—	7e6e	– 95	– 375	– 95	– 570	– 672
			7G	+ 435	+ 60	+ 810	+ 60	7g6g	– 60	– 340	– 60	– 535	– 637
			7H	+ 375	0	+ 750	0	7h6h	0	– 280	0	– 475	– 577
			8G	+ 535	+ 60	+ 1010	+ 60	8g	– 60	– 415	– 60	– 810	– 637
			8H	+ 475	0	+ 950	0	9g8g	– 60	– 510	– 60	– 810	– 637
		4,5	—	—	—	—	—	3h4h	0	– 118	0	– 315	– 650
			4H	+ 200	0	+ 425	0	4h	0	– 150	0	– 315	– 650
			5G	+ 313	+ 63	+ 593	+ 63	5g6g	– 63	– 253	– 63	– 563	– 713
			5H	+ 250	0	+ 530	0	5h4h	0	– 190	0	– 315	– 650
			—	—	—	—	—	5h6h	0	– 190	0	– 500	– 650
			—	—	—	—	—	6e	– 100	– 336	– 100	– 600	– 750
			—	—	—	—	—	6f	– 80	– 316	– 80	– 580	– 730
			6G	+ 378	+ 63	+ 733	+ 63	6g	– 63	– 299	– 63	– 563	– 713
			6H	+ 315	0	+ 670	0	6h	0	– 236	0	– 500	– 650
			—	—	—	—	—	7e6e	– 100	– 400	– 100	– 600	– 750
			7G	+ 463	+ 63	+ 913	+ 63	7g6g	– 63	– 363	– 63	– 563	– 713
			7H	+ 400	0	+ 850	0	7h6h	0	– 300	0	– 500	– 650
			8G	+ 563	+ 63	+ 1123	+ 63	8g	– 63	– 438	– 63	– 863	– 713
			8H	+ 500	0	+ 1060	0	9g8g	– 63	– 538	– 63	– 863	– 713
45	**90**	**1,5**	—	—	—	—	—	3h4h	0	– 80	0	– 150	– 217
			4H	+ 132	0	+ 190	0	4h	0	– 100	0	– 150	– 217
			5G	+ 202	+ 32	+ 268	+ 32	5g6g	– 32	– 157	– 32	– 268	– 249
			5H	+ 170	0	+ 236	0	5h4h	0	– 125	0	– 150	– 217
			—	—	—	—	—	5h6h	0	– 125	0	– 236	– 217
			—	—	—	—	—	6e	– 67	– 227	– 67	– 303	– 284
			—	—	—	—	—	6f	– 45	– 205	– 45	– 281	– 262
			6G	+ 244	+ 32	+ 332	+ 32	6g	– 32	– 192	– 32	– 268	– 249
			6H	+ 212	0	+ 300	0	6h	0	– 160	0	– 236	– 217
			—	—	—	—	—	7e6e	– 67	– 267	– 67	– 303	– 284
			7G	+ 297	+ 32	+ 407	+ 32	7g6g	– 32	– 232	– 32	– 268	– 249
			7H	+ 265	0	+ 375	0	7h6h	0	– 200	0	– 236	– 217
			8G	+ 367	+ 32	+ 507	+ 32	8g	– 32	– 282	– 32	– 407	– 249
			8H	+ 335	0	+ 475	0	9g8g	– 32	– 347	– 32	– 407	– 249
		2	—	—	—	—	—	3h4h	0	– 90	0	– 180	– 289
			4H	+ 150	0	+ 236	0	4h	0	– 112	0	– 180	– 289
			5G	+ 228	+ 38	+ 338	+ 38	5g6g	– 38	– 178	– 38	– 318	– 327
			5H	+ 190	0	+ 300	0	5h4h	0	– 140	0	– 180	– 289
			—	—	—	—	—	5h6h	0	– 140	0	– 280	– 289
			—	—	—	—	—	6e	– 71	– 251	– 71	– 351	– 360
			—	—	—	—	—	6f	– 52	– 232	– 52	– 332	– 341
			6G	+ 274	+ 38	+ 413	+ 38	6g	– 38	– 218	– 38	– 318	– 327
			6H	+ 236	0	+ 375	0	6h	0	– 180	0	– 280	– 289
			—	—	—	—	—	7e6e	– 71	– 295	– 71	– 351	– 360
			7G	+ 338	+ 38	+ 513	+ 38	7g6g	– 38	– 262	– 38	– 318	– 327

(*continued*)

Table 1 *(continued)*

Basic major diameter		Pitch	Internal thread					External thread					
			Tolerance class	Pitch diameter		Minor diameter		Tolerance class	Pitch diameter		Major diameter		Minor diameter
over	up to			*ES*	*EI*	*ES*	*EI*		*es*	*ei*	*es*	*ei*	Deviation $-\left(\lvert es\rvert+\frac{H}{6}\right)$ for stress calculation
mm	mm	mm		µm	µm	µm	µm		µm	µm	µm	µm	µm
45	90	2	7H	+ 300	0	+ 475	0	7h6h	0	− 224	0	− 280	− 289
			8G	+ 413	+ 38	+ 638	+ 38	8g	− 38	− 318	− 38	− 488	− 327
			8H	+ 375	0	+ 600	0	9g8g	− 38	− 393	− 38	− 488	− 327
		3	—	—	—	—	—	3h4h	0	− 106	0	− 236	− 433
			4H	+ 180	0	+ 315	0	4h	0	− 132	0	− 236	− 433
			5G	+ 272	+ 48	+ 448	+ 48	5g6g	− 48	− 218	− 48	− 423	− 481
			5H	+ 224	0	+ 400	0	5h4h	0	− 170	0	− 236	− 433
			—	—	—	—	—	5h6h	0	− 170	0	− 375	− 433
			—	—	—	—	—	6e	− 85	− 297	− 85	− 460	− 518
			—	—	—	—	—	6f	− 63	− 275	− 63	− 438	− 496
			6G	+ 328	+ 48	+ 548	+ 48	6g	− 48	− 260	− 48	− 423	− 481
			6H	+ 280	0	+ 500	0	6h	0	− 212	0	− 375	− 433
			—	—	—	—	—	7e6e	− 85	− 350	− 85	− 460	− 518
			7G	+ 403	+ 48	+ 678	+ 48	7g6g	− 48	− 313	− 48	− 423	− 481
			7H	+ 355	0	+ 630	0	7h6h	0	− 265	0	− 375	− 433
			8G	+ 498	+ 48	+ 848	+ 48	8g	− 48	− 383	− 48	− 648	− 481
			8H	+ 450	0	+ 800	0	9g8g	− 48	− 473	− 48	− 648	− 481
		4	—	—	—	—	—	3h4h	0	− 118	0	− 300	− 577
			4H	+ 200	0	+ 375	0	4h	0	− 150	0	− 300	− 577
			5G	+ 310	+ 60	+ 535	+ 60	5g6g	− 60	− 250	− 60	− 535	− 637
			5H	+ 250	0	+ 475	0	5h4h	0	− 190	0	− 300	− 577
			—	—	—	—	—	5h6h	0	− 190	0	− 475	− 577
			—	—	—	—	—	6e	− 95	− 331	− 95	− 570	− 672
			—	—	—	—	—	6f	− 75	− 311	− 75	− 550	− 652
			6G	+ 375	+ 60	+ 660	+ 60	6g	− 60	− 296	− 60	− 535	− 637
			6H	+ 315	0	+ 600	0	6h	0	− 236	0	− 475	− 577
			—	—	—	—	—	7e6e	− 95	− 395	− 95	− 570	− 672
			7G	+ 460	+ 60	+ 810	+ 60	7g6g	− 60	− 360	− 60	− 535	− 637
			7H	+ 400	0	+ 750	0	7h6h	0	− 300	0	− 475	− 577
			8G	+ 560	+ 60	+ 1 010	+ 60	8g	− 60	− 435	− 60	− 810	− 637
			8H	+ 500	0	+ 950	0	9g8g	− 60	− 535	− 60	− 810	− 637
		5	—	—	—	—	—	3h4h	0	− 125	0	− 335	− 722
			4H	+ 212	0	+ 450	0	4h	0	− 160	0	− 335	− 722
			5G	+ 336	+ 71	+ 631	+ 71	5g6g	− 71	− 271	− 71	− 601	− 793
			5H	+ 265	0	+ 560	0	5h4h	0	− 200	0	− 335	− 722
			—	—	—	—	—	5h6h	0	− 200	0	− 530	− 722
			—	—	—	—	—	6e	− 106	− 356	− 106	− 636	− 828
			—	—	—	—	—	6f	− 85	− 335	− 85	− 615	− 807
			6G	+ 406	+ 71	+ 781	+ 71	6g	− 71	− 321	− 71	− 601	− 793
			6H	+ 335	0	+ 710	0	6h	0	− 250	0	− 530	− 722
			—	—	—	—	—	7e6e	− 106	− 421	− 106	− 636	− 828
			7G	+ 496	+ 71	+ 971	+ 71	7g6g	− 71	− 386	− 71	− 601	− 793
			7H	+ 425	0	+ 900	0	7h6h	0	− 315	0	− 530	− 722
			8G	+ 601	+ 71	+ 1 191	+ 71	8g	− 71	− 471	− 71	− 921	− 793
			8H	+ 530	0	+ 1 120	0	9g8g	− 71	− 571	− 71	− 921	− 793
		5,5	—	—	—	—	—	3h4h	0	− 132	0	− 355	− 794

(continued)

Table 1 (*continued*)

Basic major diameter		Pitch	Internal thread					External thread					
			Tolerance class	Pitch diameter		Minor diameter		Tolerance class	Pitch diameter		Major diameter		Minor diameter
over	up to			*ES*	*EI*	*ES*	*EI*		*es*	*ei*	*es*	*ei*	Deviation $-\left(\lvert es\rvert + \frac{H}{6}\right)$ for stress calculation
mm	mm	mm		µm	µm	µm	µm		µm	µm	µm	µm	µm
45	90	5,5	4H	+ 224	0	+ 475	0	4h	0	– 170	0	– 355	– 794
			5G	+ 355	+ 75	+ 675	+ 75	5g6g	– 75	– 287	– 75	– 635	– 869
			5H	+ 280	0	+ 600	0	5h4h	0	– 212	0	– 355	– 794
			—	—	—	—	—	5h6h	0	– 212	0	– 560	– 794
			—	—	—	—	—	6e	– 112	– 377	– 112	– 672	– 906
			—	—	—	—	—	6f	– 90	– 355	– 90	– 650	– 884
			6G	+ 430	+ 75	+ 825	+ 75	6g	– 75	– 340	– 75	– 635	– 869
			6H	+ 355	0	+ 750	0	6h	0	– 265	0	– 560	– 794
			—	—	—	—	—	7e6e	– 112	– 447	– 112	– 672	– 906
			7G	+ 525	+ 75	+ 1 025	+ 75	7g6g	– 75	– 410	– 75	– 635	– 869
			7H	+ 450	0	+ 950	0	7h6h	0	– 335	0	– 560	– 794
			8G	+ 635	+ 75	+ 1 255	+ 75	8g	– 75	– 500	– 75	– 975	– 869
			8H	+ 560	0	+ 1 180	0	9g8g	– 75	– 605	– 75	– 975	– 869
		6	—	—	—	—	—	3h4h	0	– 140	0	– 375	– 866
			4H	+ 236	0	+ 500	0	4h	0	– 180	0	– 375	– 866
			5G	+ 380	+ 80	+ 710	+ 80	5g6g	– 80	– 304	– 80	– 680	– 946
			5H	+ 300	0	+ 630	0	5h4h	0	– 224	0	– 375	– 866
			—	—	—	—	—	5h6h	0	– 224	0	– 600	– 866
			—	—	—	—	—	6e	– 118	– 398	– 118	– 718	– 984
			—	—	—	—	—	6f	– 95	– 375	– 95	– 695	– 961
			6G	+ 455	+ 80	+ 880	+ 80	6g	– 80	– 360	– 80	– 680	– 946
			6H	+ 375	0	+ 800	0	6h	0	– 280	0	– 600	– 866
			—	—	—	—	—	7e6e	– 118	– 473	– 118	– 718	– 984
			7G	+ 555	+ 80	+ 1 080	+ 80	7g6g	– 80	– 435	– 80	– 680	– 946
			7H	+ 475	0	+ 1 000	0	7h6h	0	– 355	0	– 600	– 866
			8G	+ 680	+ 80	+ 1 330	+ 80	8g	– 80	– 530	– 80	– 1 030	– 946
			8H	+ 600	0	+ 1 250	0	9g8g	– 80	– 640	– 80	– 1 030	– 946
90	180	2	—	—	—	—	—	3h4h	0	– 95	0	– 180	– 289
			4H	+ 160	0	+ 236	0	4h	0	– 118	0	– 180	– 289
			5G	+ 238	+ 38	+ 338	+ 38	5g6g	– 38	– 188	– 38	– 318	– 327
			5H	+ 200	0	+ 300	0	5h4h	0	– 150	0	– 180	– 289
			—	—	—	—	—	5h6h	0	– 150	0	– 280	– 289
			—	—	—	—	—	6e	– 71	– 261	– 71	– 351	– 360
			—	—	—	—	—	6f	– 52	– 242	– 52	– 332	– 341
			6G	+ 288	+ 38	+ 413	+ 38	6g	– 38	– 228	– 38	– 318	– 327
			6H	+ 250	0	+ 375	0	6h	0	– 190	0	– 280	– 289
			—	—	—	—	—	7e6e	– 71	– 307	– 71	– 351	– 360
			7G	+ 353	+ 38	+ 513	+ 38	7g6g	– 38	– 274	– 38	– 318	– 327
			7H	+ 315	0	+ 475	0	7h6h	0	– 236	0	– 280	– 289
			8G	+ 438	+ 38	+ 638	+ 38	8g	– 38	– 338	– 38	– 488	– 327
			8H	+ 400	0	+ 600	0	9g8g	– 38	– 413	– 38	– 488	– 327
		3	—	—	—	—	—	3h4h	0	– 112	0	– 236	– 433
			4H	+ 190	0	+ 315	0	4h	0	– 140	0	– 236	– 433
			5G	+ 284	+ 48	+ 448	+ 48	5g6g	– 48	– 228	– 48	– 423	– 481
			5H	+ 236	0	+ 400	0	5h4h	0	– 180	0	– 236	– 433
			—	—	—	—	—	5h6h	0	– 180	0	– 375	– 433
			—	—	—	—	—	6e	– 85	– 309	– 85	– 460	– 518

(*continued*)

Table 1 (*continued*)

Basic major diameter		Pitch	Internal thread					External thread					
over	up to		Toler-ance class	Pitch diameter		Minor diameter		Toler-ance class	Pitch diameter		Major diameter		Minor diameter
				ES	*EI*	*ES*	*EI*		*es*	*ei*	*es*	*ei*	Deviation $-\left(\lvert es \rvert + \frac{H}{6}\right)$ for stress calculation
mm	mm	mm		µm	µm	µm	µm		µm	µm	µm	µm	µm
90	**180**	**3**	—	—	—	—	—	6f	− 63	− 287	− 63	− 438	− 496
			6G	+ 348	+ 48	+ 548	+ 48	6g	− 48	− 272	− 48	− 423	− 481
			6H	+ 300	0	+ 500	0	6h	0	− 224	0	− 375	− 433
			—	—	—	—	—	7e6e	− 85	− 365	− 85	− 460	− 518
			7G	+ 423	+ 48	+ 678	+ 48	7g6g	− 48	− 328	− 48	− 423	− 481
			7H	+ 375	0	+ 630	0	7h6h	0	− 280	0	− 375	− 433
			8G	+ 523	+ 48	+ 848	+ 48	8g	− 48	− 403	− 48	− 648	− 481
			8H	+ 475	0	+ 800	0	9g8g	− 48	− 498	− 48	− 648	− 481
		4	—	—	—	—	—	3h4h	0	− 125	0	− 300	− 577
			4H	+ 212	0	+ 375	0	4h	0	− 160	0	− 300	− 577
			5G	+ 325	+ 60	+ 535	+ 60	5g6g	− 60	− 260	− 60	− 535	− 637
			5H	+ 265	0	+ 475	0	5h4h	0	− 200	0	− 300	− 577
			—	—	—	—	—	5h6h	0	− 200	0	− 475	− 577
			—	—	—	—	—	6e	− 95	− 345	− 95	− 570	− 672
			—	—	—	—	—	6f	− 75	− 325	− 75	− 550	− 652
			6G	+ 395	+ 60	+ 660	+ 60	6g	− 60	− 310	− 60	− 535	− 637
			6H	+ 335	0	+ 600	0	6h	0	− 250	0	− 475	− 577
			—	—	—	—	—	7e6e	− 95	− 410	− 95	− 570	− 672
			7G	+ 485	+ 60	+ 810	+ 60	7g6g	− 60	− 375	− 60	− 535	− 637
			7H	+ 425	0	+ 750	0	7h6h	0	− 315	0	− 475	− 577
			8G	+ 590	+ 60	+ 1 010	+ 60	8g	− 60	− 460	− 60	− 810	− 637
			8H	+ 530	0	+ 950	0	9g8g	− 60	− 560	− 60	− 810	− 637
		6	—	—	—	—	—	3h4h	0	− 150	0	− 375	− 866
			4H	+ 250	0	+ 500	0	4h	0	− 190	0	− 375	− 866
			5G	+ 395	+ 80	+ 710	+ 80	5g6g	− 80	− 316	− 80	− 680	− 946
			5H	+ 315	0	+ 630	0	5h4h	0	− 236	0	− 375	− 866
			—	—	—	—	—	5h6h	0	− 236	0	− 600	− 866
			—	—	—	—	—	6e	− 118	− 418	− 118	− 718	− 984
			—	—	—	—	—	6f	− 95	− 395	− 95	− 695	− 961
			6G	+ 480	+ 80	+ 880	+ 80	6g	− 80	− 380	− 80	− 680	− 946
			6H	+ 400	0	+ 800	0	6h	0	− 300	0	− 600	− 866
			—	—	—	—	—	7e6e	− 118	− 493	− 118	− 718	− 984
			7G	+ 580	+ 80	+ 1 080	+ 80	7g6g	− 80	− 455	− 80	− 680	− 946
			7H	+ 500	0	+ 1 000	0	7h6h	0	− 375	0	− 600	− 866
			8G	+ 710	+ 80	+ 1 330	+ 80	8g	− 80	− 555	− 80	− 1 030	− 946
			8H	+ 630	0	+ 1 250	0	9g8g	− 80	− 680	− 80	− 1 030	− 946
		8[a]	—	—	—	—	—	3h4h	0	− 170	0	− 450	− 1 155
			4H	+ 280	0	+ 630	0	4h	0	− 212	0	− 450	− 1 155
			5G	+ 380	+ 100	+ 900	+ 100	5g6g	− 100	− 365	− 100	− 810	− 1 255
			5H	+ 355	0	+ 800	0	5h4h	0	− 265	0	− 450	− 1 155
			—	—	—	—	—	5h6h	0	− 265	0	− 710	− 1 155
			—	—	—	—	—	6e	− 140	− 475	− 140	− 850	− 1 295
			—	—	—	—	—	6f	− 118	− 453	− 118	− 828	− 1 273
			6G	+ 550	+ 100	+ 1 100	+ 100	6g	− 100	− 435	− 100	− 810	− 1 255
			6H	+ 450	0	+ 1 000	0	6h	0	− 335	0	− 710	− 1 155

(*continued*)

Table 1 (*continued*)

Basic major diameter		Pitch	Internal thread					External thread					
			Tolerance class	Pitch diameter		Minor diameter		Tolerance class	Pitch diameter		Major diameter		Minor diameter
over	up to			*ES*	*EI*	*ES*	*EI*		*es*	*ei*	*es*	*ei*	Deviation $-\left(\lvert es\rvert + \frac{H}{6}\right)$ for stress calculation
mm	mm	mm		µm	µm	µm	µm		µm	µm	µm	µm	µm
90	**180**	**8**[a]	—	—	—	—	—	7e6e	− 140	− 565	− 140	− 850	− 1 295
			7G	+ 660	+ 100	+ 1 350	+ 100	7g6g	− 100	− 525	− 100	− 810	− 1 255
			7H	+ 560	0	+ 1 250	0	7h6h	0	− 425	0	− 710	− 1 155
			8G	+ 810	+ 100	+ 1 700	+ 100	8g	− 100	− 630	− 100	− 1 280	− 1 255
			8H	+ 710	0	+ 1 600	0	9g8g	− 100	− 770	− 100	− 1 280	− 1 255
180	**355**	**3**	—	—	—	—	—	3h4h	0	− 125	0	− 236	− 433
			4H	+ 212	0	+ 315	0	4h	0	− 160	0	− 236	− 433
			5G	+ 313	+ 48	+ 448	+ 48	5g6g	− 48	− 248	− 48	− 423	− 481
			5H	+ 265	0	+ 400	0	5h4h	0	− 200	0	− 236	− 433
			—	—	—	—	—	5h6h	0	− 200	0	− 375	− 433
			—	—	—	—	—	6e	− 85	− 335	− 85	− 460	− 518
			—	—	—	—	—	6f	− 63	− 313	− 63	− 438	− 496
			6G	+ 383	+ 48	+ 548	+ 48	6g	− 48	− 298	− 48	− 423	− 481
			6H	+ 335	0	+ 500	0	6h	0	− 250	0	− 375	− 433
			—	—	—	—	—	7e6e	− 85	− 400	− 85	− 460	− 518
			7G	+ 473	+ 48	+ 678	+ 48	7g6g	− 48	− 363	− 48	− 423	− 481
			7H	+ 425	0	+ 630	0	7h6h	0	− 315	0	− 375	− 433
			8G	+ 578	+ 48	+ 848	+ 48	8g	− 48	− 448	− 48	− 648	− 481
			8H	+ 530	0	+ 800	0	9g8g	− 48	− 548	− 48	− 648	− 481
		4	—	—	—	—	—	3h4h	0	− 140	0	− 300	− 577
			4H	+ 236	0	+ 375	0	4h	0	− 180	0	− 300	− 577
			5G	+ 360	+ 60	+ 535	+ 60	5g6g	− 60	− 284	− 60	− 535	− 637
			5H	+ 300	0	+ 475	0	5h4h	0	− 224	0	− 300	− 577
			—	—	—	—	—	5h6h	0	− 224	0	− 475	− 577
			—	—	—	—	—	6e	− 95	− 375	− 95	− 570	− 672
			—	—	—	—	—	6f	− 75	− 355	− 75	− 550	− 652
			6G	+ 435	+ 60	+ 660	+ 60	6g	− 60	− 340	− 60	− 535	− 637
			6H	+ 375	0	+ 660	0	6h	0	− 280	0	− 475	− 577
			—	—	—	—	—	7e6e	− 95	− 450	− 95	− 570	− 672
			7G	+ 535	+ 60	+ 810	+ 60	7g6g	− 60	− 415	− 60	− 535	− 637
			7H	+ 475	0	+ 750	0	7h6h	0	− 355	0	− 475	− 577
			8G	+ 660	+ 60	+ 1 010	+ 60	8g	− 60	− 510	− 60	− 810	− 637
			8H	+ 600	0	+ 950	0	9g8g	− 60	− 620	− 60	− 810	− 637
		6	—	—	—	—	—	3h4h	0	− 160	0	− 375	− 866
			4H	+ 265	0	+ 500	0	4h	0	− 200	0	− 375	− 866
			5G	+ 415	+ 80	+ 710	+ 80	5g6g	− 80	− 330	− 80	− 680	− 946
			5H	+ 335	0	+ 630	0	5h4h	0	− 250	0	− 375	− 866
			—	—	—	—	—	5h6h	0	− 250	0	− 600	− 866
			—	—	—	—	—	6e	− 118	− 433	− 118	− 718	− 984
			—	—	—	—	—	6f	− 95	− 410	− 95	− 695	− 961
			6G	+ 505	+ 80	+ 880	+ 80	6g	− 80	− 395	− 80	− 680	− 946
			6H	+ 425	0	+ 800	0	6h	0	− 315	0	− 600	− 866
			—	—	—	—	—	7e6e	− 118	− 518	− 118	− 718	− 984
			7G	+ 610	+ 80	+ 1 080	+ 80	7g6g	− 80	− 480	− 80	− 680	− 946
			7H	+ 530	0	+ 1 000	0	7h6h	0	− 400	0	− 600	− 866
			8G	+ 750	+ 80	+ 1 330	+ 80	8g	− 80	− 580	− 80	− 1 030	− 946

(*continued*)

Table 1 (*concluded*)

Basic major diameter		Pitch	Internal thread					External thread					
			Toler-ance class	Pitch diameter		Minor diameter		Toler-ance class	Pitch diameter		Major diameter		Minor diameter
over	up to			*ES*	*EI*	*ES*	*EI*		*es*	*ei*	*es*	*ei*	**Deviation** $-\left(\lvert es\rvert + \frac{H}{6}\right)$ **for stress calculation**
mm	mm	mm		µm	µm	µm	µm		µm	µm	µm	µm	µm
180	**355**	**6**	8H	+ 670	0	+ 1250	0	9g8g	− 80	− 710	− 80	− 1030	− 946
		8	—	—	—	—	—	3h4h	0	− 180	0	− 450	− 1 155
			4H	+ 300	0	+ 630	0	4h	0	− 224	0	− 450	− 1 155
			5G	+ 475	+ 100	+ 900	+ 100	5g6g	− 100	− 380	− 100	− 810	− 1 255
			5H	+ 375	0	+ 800	0	5h4h	0	− 280	0	− 450	− 1 155
			—	—	—	—	—	5h6h	0	− 280	0	− 710	− 1 155
			—	—	—	—	—	6e	− 140	− 495	− 140	− 850	− 1 295
			—	—	—	—	—	6f	− 118	− 473	− 118	− 828	− 1 273
			6G	+ 575	+ 100	+ 1 100	+ 100	6g	− 100	− 455	− 100	− 810	− 1 255
			6H	+ 475	0	+ 1 000	0	6h	0	− 355	0	− 710	− 1 155
			—	—	—	—	—	7e6e	− 140	− 590	− 140	− 850	− 1 295
			7G	+ 700	+ 100	+ 1 350	+ 100	7g6g	− 100	− 550	− 100	− 810	− 1 255
			7H	+ 600	0	+ 1 250	0	7h6h	0	− 450	0	− 710	− 1 155
			8G	+ 850	+ 100	+ 1 700	+ 100	8g	− 100	− 660	− 100	− 1 280	− 1 255
			8H	+ 750	0	+ 1 600	0	9g8g	− 100	− 810	− 100	− 1 280	− 1 255

[a] Pitch 8 mm applies only to basic major diameters M125 and larger.

(*Continued from second cover*)

This standard (Part 3) covers the 'Deviations for constructional screw threads' and superseds IS 4218 (Part 5) : 1979 which stands withdrawn after publication of this standard. The other four parts of the standard are listed below:

IS No.	*Title*
IS 14962 (Part 1) : 2001/ ISO 965-1 : 1998	ISO general purpose metric screw threads — Tolerances: Part 1 Principles and basic data
IS 14962 (Part 2) : 2001/ ISO 965-2 : 1998	ISO general purpose metric screw threads — Tolerances: Part 2 Limits of sizes for general purposes external and internal screw threads — Medium quality
IS 14962 (Part 4) : 2001/ ISO 965-4 : 1998	ISO general purpose metric screw threads — Tolerances: Part 4 Limits of sizes for hot-dip galvanized external screw threads to mate with internal screw threads tapped with tolerance position H or G after galvanizing
IS 14962 (Part 5) : 2001/ ISO 965-5 : 1998	ISO general purpose metric screw threads — Tolerances: Part 5 Limits of sizes for internal screw threads to mate with hot-dip galvanized external screw threads with maximum size of tolerance position h before galvanizing

Indian Standards covering the various requirements of ISO general purpose metric screw threads except tolerances are listed below:

IS No.	*Title*
IS 4218 (Part 1) : 2001/ ISO 68-1 : 1998	ISO general purpose metric screw threads: Part 1 Basic profile (*second revision*)
IS 4218 (Part 2) : 2001/ ISO 261 : 1998	ISO general purpose metric screw threads: Part 2 General plan (*second revision*)
IS 4218 (Part 3) : 1999/ ISO 724 : 1993	ISO general purpose metric screw threads: Part 3 Basic dimensions (*second revision*)
IS 4218 (Part 4) : 2001/ ISO 262 : 1998	ISO general purpose metric screw threads : Part 4 Selected sizes for screws, bolts and nuts (*second revision*)

In reporting the results of a test or analysis made in accordance with this standard, if the final value, observed or calculated, is to be rounded off, it shall be done in accordance with IS 2 : 1960 'Bules for rounding off numerical values (*revised*)'.

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act,* 1986 to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Catalogue' and 'Standards : Monthly Additions'.

This Indian Standard has been developed from Doc : No. BP 20 (0464).

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110 002
Telephones : 323 01 31, 323 33 75, 323 94 02

Telegrams: Manaksanstha
(Common to all offices)

Regional Offices :	Telephone
Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg NEW DELHI 110002	323 76 17 323 38 41
Eastern : 1/14 C. I. T. Scheme VII M, V. I. P. Road, Kankurgachi CALCUTTA 700 054	337 84 99, 337 85 61 337 86 26, 337 91 20
Northern : SCO 335-336, Sector 34-A, CHANDIGARH 160 022	60 38 43 60 20 25
Southern : C. I. T. Campus, IV Cross Road, CHENNAI 600 113	235 02 16, 235 04 42 235 15 19, 235 23 15
Western : Manakalaya, E9 MIDC, Marol, Andheri (East) MUMBAI 400 093	832 92 95, 832 78 58 832 78 91, 832 78 92

Branches : AHMADABAD. BANGALORE. BHOPAL. BHUBANESHWAR. COIMBATORE. FARIDABAD. GHAZIABAD. GUWAHATI. HYDERABAD. JAIPUR. KANPUR. LUCKNOW. NAGPUR. PATNA. PUNE. RAJKOT. THIRUVANANTHAPURAM.

Printed at New India Printing Press, Khurja, India