

SteelStag SS2026

Everything required to quote, sample, and produce the SS2026 collection.

COLLECTION	SS2026	STATUS	SAMPLING	STYLES	2	COLOURS	5
QUANTITY	1,200 PCS						

Production Summary

For approved manufacturing partners · Last updated 25 June 2026

Collection	SS2026 Core T-Shirt Launch
Total Order Quantity	1,200 pcs
Styles	ST-RN-001 Round Neck · ST-VN-003 V-Neck
Colours	Jet Black, Bright White, Seaport Teal, Wild Ginger, Brown Sugar
Fabric	100% Combed Ring-Spun Cotton · Single Jersey · 125 GSM
Current Stage	Sampling and vendor selection
Bulk Production	Only after written approval of lab dip, fit sample, and PP sample

Production note: Follow the approved Tech Pack. No fabric, construction, trim, label, packaging, or colour substitutions are allowed without written approval from SteelStag.

Product Specifications

SS2026 · Styles ST-RN-001 & ST-VN-003 · Full details in Tech Pack

STYLE CODES

ST-RN-001	Men's Round Neck T-Shirt
ST-VN-003	Men's V-Neck T-Shirt

FABRIC

Composition	100% Combed Cotton — Single Jersey
Yarn Count	30s Combed Ring-Spun
GSM	125 GSM · tolerance ±5 GSM
Dyeing	Reactive dyed
Finish	Light enzyme wash · no heavy silicone finish
Pre-treatment	Pre-washed and pre-shrunk
Shrinkage	Maximum ±3% after wash · no twisting

CONSTRUCTION

Stitch Density	12–14 SPI
Thread	Self-colour polyester thread to match each colourway
Body Seams	Overlock / serger
Neck Finish	Clean-bound self-fabric tape · no rib band · single needle topstitch 1/8" from edge
Sleeve Finish	Twin needle · 1/4" hem · self-colour
Bottom Hem	Single needle · 1" hem · self-colour thread

Body Measurements

All measurements in inches · Tolerance ±¼" unless noted

POINT OF MEASURE	S	M	L	XL
HPS Length	26¾	27½	28¼	29
CB Length (from seam)	25¾	26½	27¼	28
Shoulder to Shoulder	17	17½	18	18½
½ Chest (1" below AH)	19¼	19¾	20¼	20¾
½ Waist	19¼	19¾	20¼	20¾
½ Sweep (Straight)	19¼	19¾	20¼	20¾
Armhole Drop from HPS	10½	10¾	11	11¼
½ Sleeve Opening	6	6¼	6½	6¾

Neck Measurements

All measurements in inches · Per style

ROUND NECK — ST-RN-001

POINT OF MEASURE	S	M	L	XL
Neck Width	7	7¼	7½	7¾
Front Neck Drop	2⅞	3	3⅞	3¼
Back Neck Drop	1	1	1	1
Collar Band Ht	NA	NA	NA	NA

DEEP SCOOP — ST-DS-002

POINT OF MEASURE	S	M	L	XL
Neck Width	8	8½	8¾	9
Front Neck Drop	4¼	4½	4⅝	4¾
Back Neck Drop	1	1	1	1
Collar Band Ht	NA	NA	NA	NA

V-NECK — ST-VN-003

POINT OF MEASURE	S	M	L	XL
Neck Width	6¾	7	7¼	7½
Front Neck Drop	3½	3¾	4	4¼
Back Neck Drop	1	1	1	1
V-Point Depth	3½	3¾	4	4¼
Collar Band Ht	NA	NA	NA	NA

Quantity Breakdown

Updated launch quantity · 1,200 pcs total

BY COLOUR AND STYLE

COLOUR	ROUND NECK	V-NECK	TOTAL
Jet Black	150 pcs	150 pcs	300 pcs
Bright White	125 pcs	125 pcs	250 pcs
Seaport Teal	100 pcs	100 pcs	200 pcs
Wild Ginger	100 pcs	100 pcs	200 pcs
Brown Sugar	125 pcs	125 pcs	250 pcs
Total	600 pcs	600 pcs	1,200 pcs


SIZE SPLIT GUIDANCE

STYLE QTY	S	M	L	XL	TOTAL
150 pcs/style	22	53	53	22	150
125 pcs/style	19	44	43	19	125
100 pcs/style	15	35	35	15	100

Target split: S 15% / M 35% / L 35% / XL 15%. For 125 pcs, M and L differ by 1 piece (rounding) — either direction is acceptable.

Color Standards


Pantone TCX references · Lab dip approval required before bulk dyeing

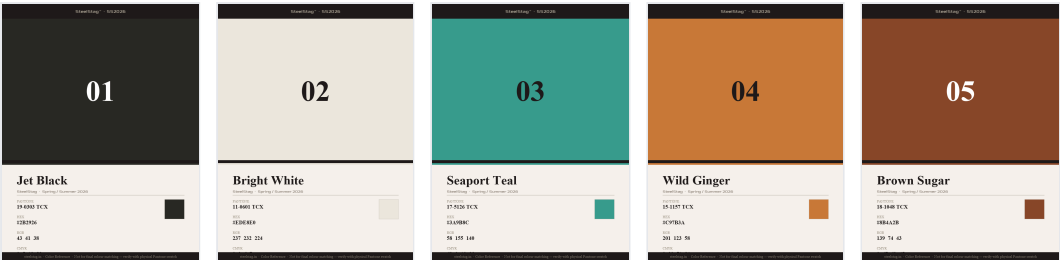

Requirement: Submit lab dips for all 5 colours on approved 125 GSM cotton. Do not bulk dye before written approval.

Labels & Branding

Use supplied artwork only · Do not re-typeset

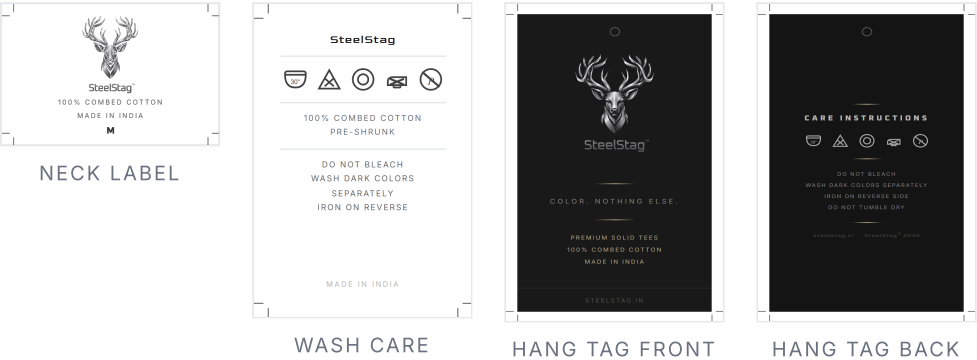

ITEM	TYPE	PLACEMENT
Neck Label	Size-specific S / M / L / XL	Centre back · 1" below collar seam
Wash Care Label	Printed / woven as supplied	Left side seam · 3" from bottom hem
Hang Tag	Double-sided printed tag with cord	Left side seam
Size Sticker	Printed sticker	Outside pouch · bottom right

Packaging

Primary retail packaging specification



Type	Kraft paper standup pouch with zipper seal
Size	32 cm × 40 cm
Material	Kraft paper laminated
Design	Two-tone: top 65% natural kraft (#C8A96E), bottom 35% matte black (#1A1A1A)
Closure	Zipper reseal at top
Finish	Matte throughout · no gloss lamination
Folding	Standard retail fold · approx. 28 cm × 20 cm
Sticker	Size sticker outside pouch · bottom right

Quality Standards

Minimum acceptable quality for SS2026

Shrinkage	Max ±3% length and width after 3 washes at 30°C
Color Fastness	Minimum Grade 4 · washing, rubbing, perspiration
Pilling	Minimum Grade 3–4 after 1000 cycles
GSM Tolerance	±5 GSM from approved standard
AQL	2.5 · inline and final inspection
Shade Consistency	Grade 4 Grey Scale within dye lot
Measurements	Follow Tech Pack tolerance table. Do not assume if unclear.
Fabric Report	Mill quality report required: GSM, shrinkage, and colour fastness.

Production Workflow

Approval sequence before bulk production

STAGE	FACTORY ACTION	APPROVAL REQUIRED
RFQ	Submit costing with fabric, CMT, trims, packaging, lead time	Buyer confirmation
Lab Dip	Submit all 5 colours on approved fabric	Written approval
Fit Sample	1 pc per style · Size M	Measurement + visual sign-off
PP Sample	1 pc per style × all 5 colours	Final approval before cutting
Bulk Production	Cut and sew after PP approval only	Inline QC required
Final Inspection	AQL 2.5 + measurement audit + shade check	Before dispatch
Dispatch	Share packing list, invoice, carton details, and AWB	Dispatch confirmation

Contact

For RFQ, sampling, approvals, and production queries

PRODUCTION CONTACT SteelStag Manufacturing hello@steelstag.in Response target: within 1 business day	SAMPLE DELIVERY Shared After Shortlisting Sample shipment details will be provided to selected factories. Always email AWB/tracking on dispatch day.
---	---

WEBSITE

steelstag.in

steelstag.in

Manufacturer portal: /manufacturer/