

Robust Beacon

Datasheet

Date: 2021-6-17

Part #	Description
i3	The i3 is a Robust Beacon with BLE 5.0, IP67, easy to install feature, and mainly designed for marketing information pushing in smart retail and workflow optimization in the workplace.

INTRODUCTION

i3 Robust Beacon can be used for the indoor location, and can be installed firmly due to screw mounting or 3M double-sided adhesive tapes, so it is stronger and safer than adhesives mounting when installed in some public places. The user can configure i3 via configuration App BeaconSET+.

FEATURE

- Advertise iBeacon & Eddystone simultaneously
- Bluetooth® 5.0 chipset nRF52 series
- IP67 Waterproof & Dustproof
- Service lifetime up to 6 years
- Replaceable battery
- The max. 200 meters advertising distance
- Flexible installations



i3 Waterproof Beacon

APPLICATION

- Asset tracking
- Indoor location
- Activity monitoring
- Inventory tracking

ACTIVATE i3

- i3 will advertise the data after inserting the battery as the following instruction of battery assembly

CONFIGURATION TOOL

- BeaconSET+ (iOS & Android);


FIRMWARE UPGRADE

1. J-LINK Port;
2. Over the Air(OTA);

Please contact MINEW sales team to ask more related information if needed.

BATTERY ASSEMBLY

- Please prepare 2pcs AA size battery;
- Please do check the polarity of batteries and battery-socket before assembly;
- Please assemble the battery as the below image;

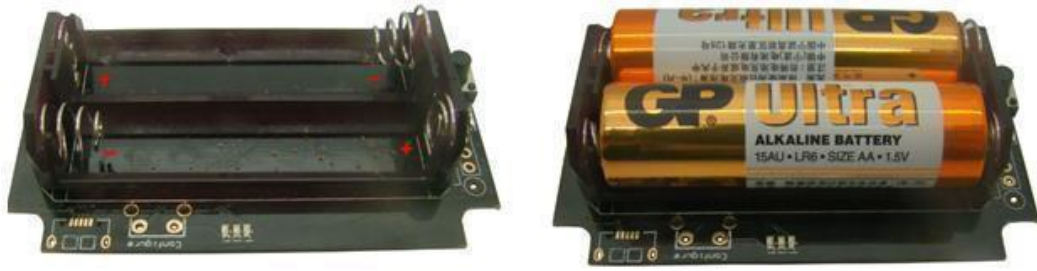

OPTIONAL BATTERY TYPE

Battery Type (AA)	Operation temperature	Capacity (single)	Total Capacity (i3)
Alkaline	-20 to 60°C	2900mAh	2900mAh
Li/FeS2	-30 to 60°C	2700mAh	5400mAh

Notes:

1. For the sample order,Minew doesn't ship out i3 Robust Beacon with battery at default.
2. The battery type can be selected as different application.

ELECTRONIC PARAMETER

Item	Value	Remarks
Case Color	Black, white	Other colors can be customized
Operation Voltage	3.0 V	DC
Transmission Range	200 meters	Maximum @ open space
Transmission Power	-40dBm to +4dBm	Configurable
Broadcasting Interval	900ms	Default setting, Configurable
Antenna	50ohm	On board / PCB Antenna
Accessories	Double-sided adhesive	1pc, high strength
	Screws	2pcs screws and 2pcs plastic holders
Net Weight	50.0g	Without battery for shipping
Size	73.8 x 47 x 24.5mm	Null

PARAMETER SETTING


Each robust beacon i3 has been pre-configured in the factory before the shipment. Here below is given the main parameters and default settings.

Type	Item	Default Settings
iBeacon	UUID (16 bytes)	E2C56DB5-DFFB-48D2-B060-D0F5A71096E0 (Proximity)
	Major (2 bytes)	0
	Minor (2 bytes)	0
	Measured Power	-59dBm9 (0xC5)
	Tx Power	0dBm
	Interval(ms)	900ms
UID (On)	Instance ID	Random
	Namespace ID	Random
	Measured Power	-24dBm(0xE8)
	Tx Power	0dBm
	Interval(ms)	2000ms
URL (On)	URL	https://www.minew.com
	Measured Power	-24dBm(0xE8)
	Tx Power	0dBm
	Interval(ms)	2000ms
TLM (On)	Electricity mV	By default
	Boot time	By default
	PDU packets	By default
	Measured power	-24dBm(0xE8)
	Tx power	0dBm
	Interval(ms)	4000ms
INFO (On)	Device name	i3
	Electricity	By default
	MAC address	Factory setting
	Measured power	-24dBm(0xE8)
	Tx power	-8dBm
	Interval(ms)	4000ms
Extra Function	Password	minew123(configurable)
	Connectable	Yes(it is configuration mode)
	Reset factory	available
	Update firmware	available

COMPATIBILITY

Supporting device&system	Module of Supporting device
iOS7.0 and above	iPhone4S, iPhone5/5C/5S iPhone6/6Plus/6S/6SPlus, iPhone7/7Plus iPad mini/mini2/4/Air/pro, etc.
Android4.3 and above	Samsung Xiaomi ,Huawei ,OnePlus, Vivo, OPPO, etc.

PACKING INFORMATION

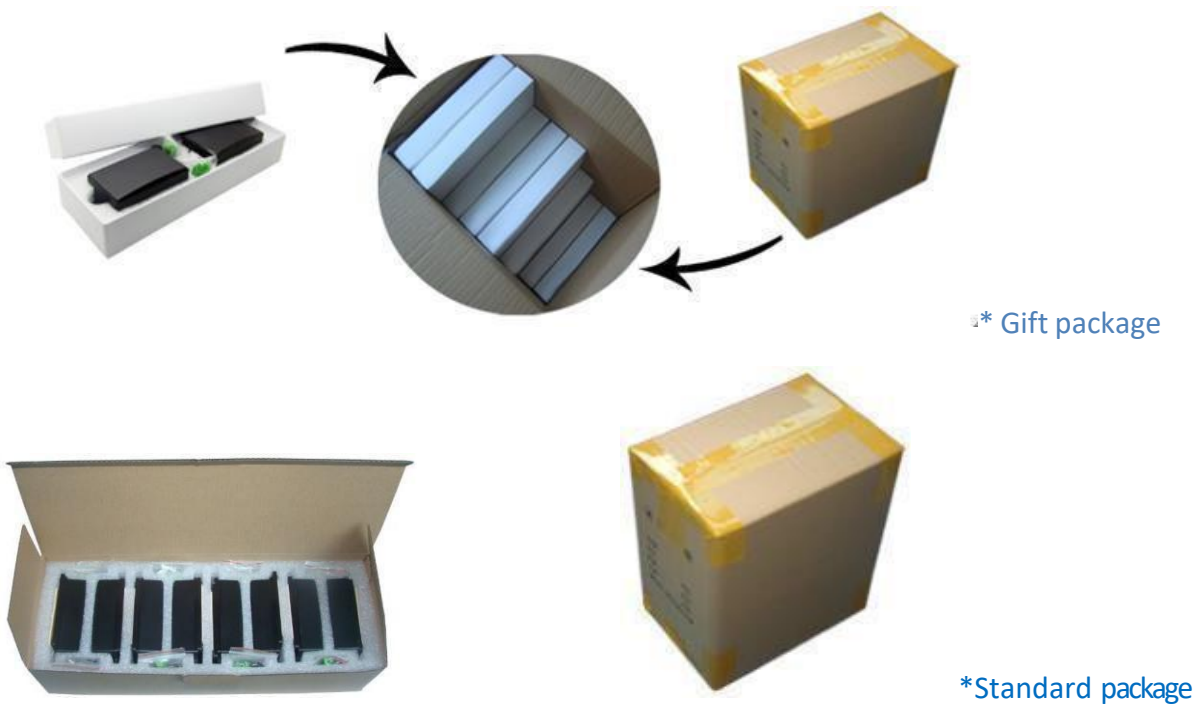

Details	Min. Package		Carton	
	Gift	Standard	Gift	Standard
Quantity(i3)	2pcs / pack	8pcs /box	80pcs/carton	
Net Weight	100.0g/ pack	400.0g/ box	4.2Kg/carton	
Gross Weight	220.0g/ pack	420.0g/ box	9.5Kg	6Kg
Size	21.5 x 7.7x 3.5 cm	32 x 11 x 8 cm	32 x 23 x 40 cm	

CERTIFICATION

- iBeacon MFi License (iBC-14-00582)
- Bluetooth® EPL Certification
- FCC Regulation (FCC Part 15.)
- CE Regulation(Included)
- IKRegulation(BCTC-160404344S)
- IPRegulation(BCTC-160404343C)

DECLARATION

The contents of this datasheet are subject to change without prior notice for further improvement.
Minew team reserves the right to explain all the terms of this datasheet.

CONTACT

Manufacturer: Shenzhen Minew Technologies Co., Ltd. Phone: +86 (755) 2103 8160

Email: info@minew.com

Address: No.8, Qinglong Road, Longhua District, Shenzhen, China

<https://www.minew.com>

<https://www.minewstore.com>

<END>