OSRAM LS Q976.01 **Datasheet**



Chip LED 0603

LS Q976.01

The Chip LED 0603 is the product of choice for status indication in electronics. The small package size allows compact designs within 7-segment displays and simple backlighting applications in dashboards and switches.





Applications

- Appliances & Tools
- Display Backlighting
- Factory Automation
- Home & Building Automation

- Projection & Display
- Static Signaling
- Transportation

Features

- Package: SMT package 0603, clear epoxy
- Chip technology: InGaAIP
- Typ. Radiation: 150°
- Color: λ_{dom} = 633 nm (• super red)
- Corrosion Robustness Class: 2B
- ESD: 2 kV acc. to ANSI/ESDA/JEDEC JS-001 (HBM)

LS Q976.01 DATASHEET



Ordering Information

Type Luminous Intensity 1) Ordering Code

 $I_{\rm F} = 20 \, \text{mA}$

ľ

LS Q976.01-N1Q2-1 28 ... 112 mcd Q65113A5254



Maximum Ratings				
Parameter	Symbol		Values	
Operating Temperature	T _{op}	min.	-40 °C	
	·	max.	85 °C	
Storage Temperature	T_{stg}	min.	-40 °C	
		max.	85 °C	
Junction Temperature	T_{j}	max.	95 °C	
Forward current	I _F	min.	1 mA	
$T_S = 25 ^{\circ}C$	·	max.	30 mA	
Forward Current pulsed	 F pulse	max.	100 mA	
$t \le 100 \ \mu s; \ D = 0.03 \ ; \ T_s = 25 \ ^{\circ}C$,,,,,			
Surge Current	I _{FS}	max.	100 mA	
$t \le 10 \ \mu s; \ D = 0.005; \ T_s = 25 \ ^{\circ}C$				
Reverse voltage 2)	V_R	max.	10 V	
$T_S = 25 ^{\circ}C$				
ESD withstand voltage	V_{ESD}		2 kV	
acc. to ANSI/ESDA/JEDEC JS-001 (HBM)	200			



Characteristics

 I_F = 20 mA; T_S = 25 °C

Parameter	Symbol		Values
Peak Wavelength	$\lambda_{\sf peak}$	typ.	640 nm
Dominant Wavelength 3)	$\lambda_{\sf dom}$	min.	627 nm
		typ.	633 nm
		max.	639 nm
Spectral Bandwidth at 50% I _{rel,max}	Δλ	typ.	14 nm
Viewing angle at 50% $\rm I_{\rm V}$	2φ	typ.	140 °
Forward Voltage 4)	V_{F}	min.	1.60 V
$I_{\rm F} = 20 \text{ mA}$	•	typ.	2.00 V
		max.	2.40 V
Reverse current ²⁾	I _R	typ.	0.01 µA
$V_R = 10 \text{ V}$	TX.	max.	10 μΑ
Real thermal resistance junction/solderpoint ⁵⁾	$R_{ ext{thJS real}}$	typ.	430 K / W
	tiloo rear	max.	510 K / W



Brightness Groups

Group	Luminous Intensity ¹⁾ I _F = 20 mA min.	Luminous Intensity. ¹⁾ I _F = 20 mA max.	Luminous Flux $^{6)}$ $I_F = 20 \text{ mA}$ typ.
	Ι,	I _v	Φ_{V}
N1	28 mcd	36 mcd	100 mlm
N2	36 mcd	45 mcd	130 mlm
P1	45 mcd	56 mcd	160 mlm
P2	56 mcd	71 mcd	200 mlm
Q1	71 mcd	90 mcd	260 mlm
Q2	90 mcd	112 mcd	320 mlm

LS Q976.01 DATASHEET



Group Name on Label

Example: N1-1


Brightness Wavelength

N1 1




Relative Spectral Emission 6)

 I_{rel} = f (λ); I_{F} = 20 mA; T_{S} = 25 °C

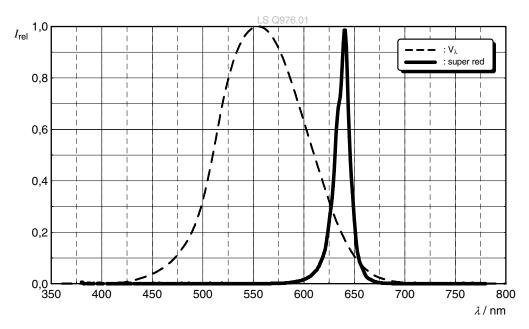

Radiation Characteristics 6)


 $I_{rel} = f(\phi); T_S = 25 °C$

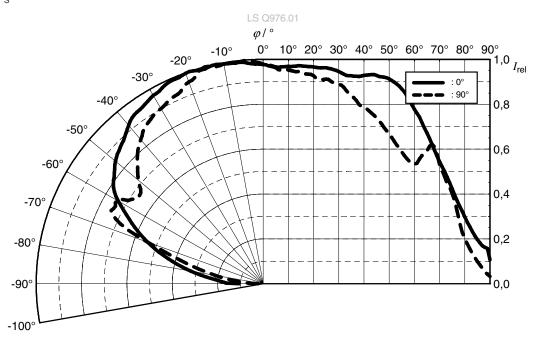




Forward current 6)

$$I_F = f(V_F); T_S = 25 \, ^{\circ}C$$

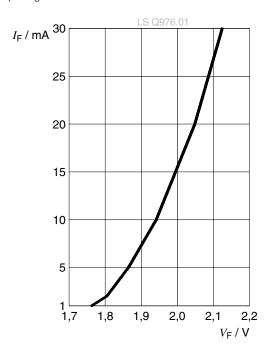

Relative Luminous Intensity 6), 7)


$$I_{v}/I_{v}(20 \text{ mA}) = f(I_{F}); T_{S} = 25 \text{ °C}$$






Forward Voltage 6)

$$\Delta V_{_F} = V_{_F} - V_{_F} (25~^{\circ}C) = f(T_{_j}); \ I_{_F} = 20~mA$$

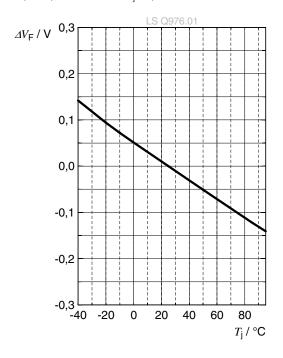


Relative Luminous Intensity 6)

$$I_{v}/I_{v}(25 \text{ °C}) = f(T_{i}); I_{F} = 20 \text{ mA}$$



Dominant Wavelength 6)


$$\Delta\lambda_{\text{dom}} = \lambda_{\text{dom}} - \lambda_{\text{dom}} (25 \text{ °C}) = f(T_j); I_F = 20 \text{ mA}$$






Max. Permissible Forward Current 5)

 $I_F = f(T)$

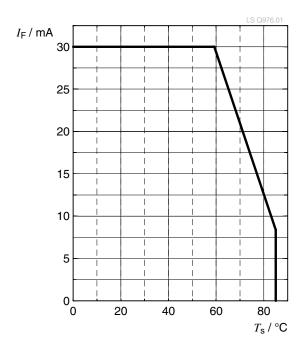


Permissible Pulse Handling Capability

 $I_F = f(t_p)$; D: Duty cycle; $T_S = 25 \,^{\circ}\text{C}$

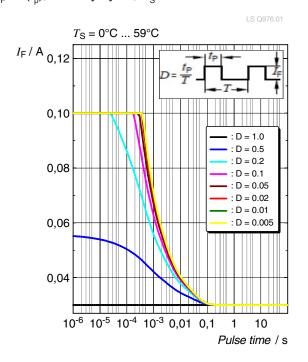


Permissible Pulse Handling Capability


 $I_{_{\rm F}}$ = f(t $_{_{
m D}}$); D: Duty cycle; $T_{_{
m S}}$ = 85 °C

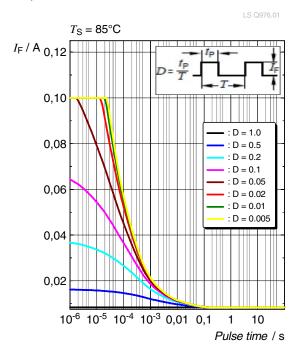




Dimensional Drawing 8)







general tolerance ±0.1

lead finish Ag

C67062-A0462-A1-02

Further Information:


Approximate Weight: 1.4 mg

Corrosion test: Class: 2B


Test condition: 25° C / 75 % RH / 10 ppm H_2 S / 21 days (IEC 60068-2-43)



Electrical Internal Circuit



Recommended Solder Pad 8)

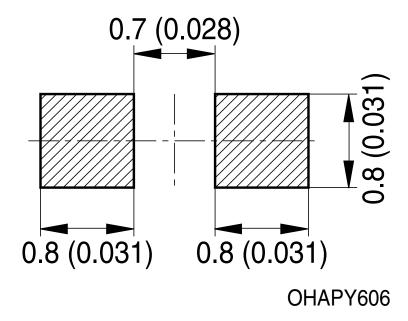


For superior solder joint connectivity results we recommend soldering under standard nitrogen atmosphere. Package not suitable for ultra sonic cleaning.



Reflow Soldering Profile

Product complies to MSL Level 3 acc. to JEDEC J-STD-020E

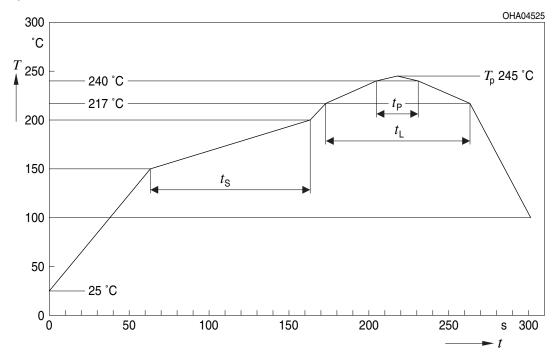


Profile Feature	Symbol	Pb-Free (SnAgCu) Assembly			Unit
		Minimum	Recommendation	Maximum	
Ramp-up rate to preheat*) 25 °C to 150 °C			2	3	K/s
Time t_s T_{Smin} to T_{Smax}	t _s	60	100	120	S
Ramp-up rate to peak*) T _{Smax} to T _P			2	3	K/s
Liquidus temperature	T_{L}		217		°C
Time above liquidus temperature	t_		80	100	S
Peak temperature	T _P		245	260	°C
Time within 5 °C of the specified peak temperature T _P - 5 K	t _P	10	20	30	S
Ramp-down rate* T _P to 100 °C			3	6	K/s
Time 25 °C to T _P				480	S


All temperatures refer to the center of the package, measured on the top of the component

^{*} slope calculation DT/Dt: Dt max. 5 s; fulfillment for the whole T-range



Taping 8)

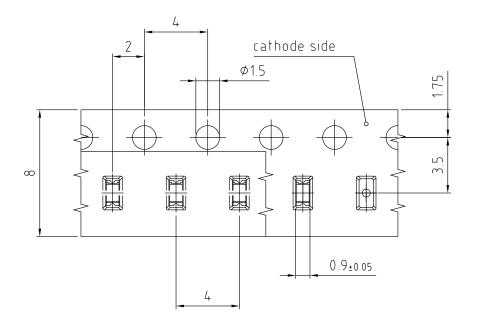




C67062-A0462-B1-02



Tape and Reel 9)

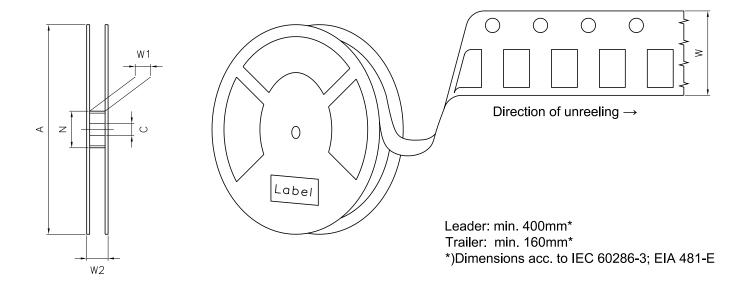


Reel Dimensions


Α	W	N_{\min}	W_1	$W_{2 max}$	Pieces per PU
180 mm	8 + 0.3 / - 0.1 mm	58 mm	8.4 + 1,5 mm	14.4 mm	4000



Barcode-Product-Label (BPL)

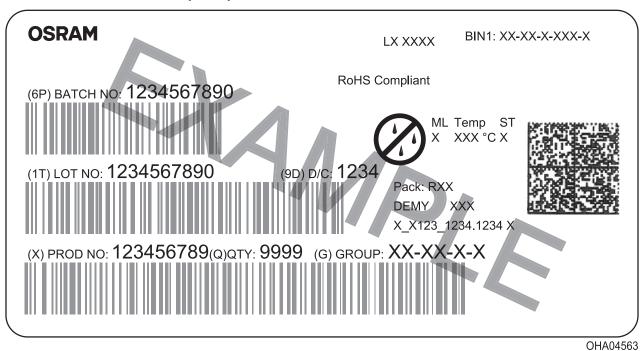


Dry Packing Process and Materials 8)

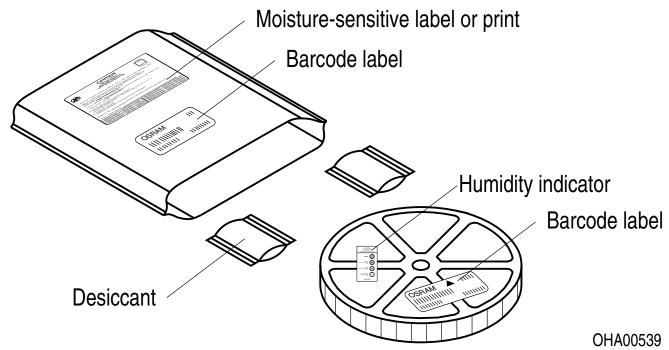

Moisture-sensitive product is packed in a dry bag containing desiccant and a humidity card according JEDEC-STD-033.



Type Designation System

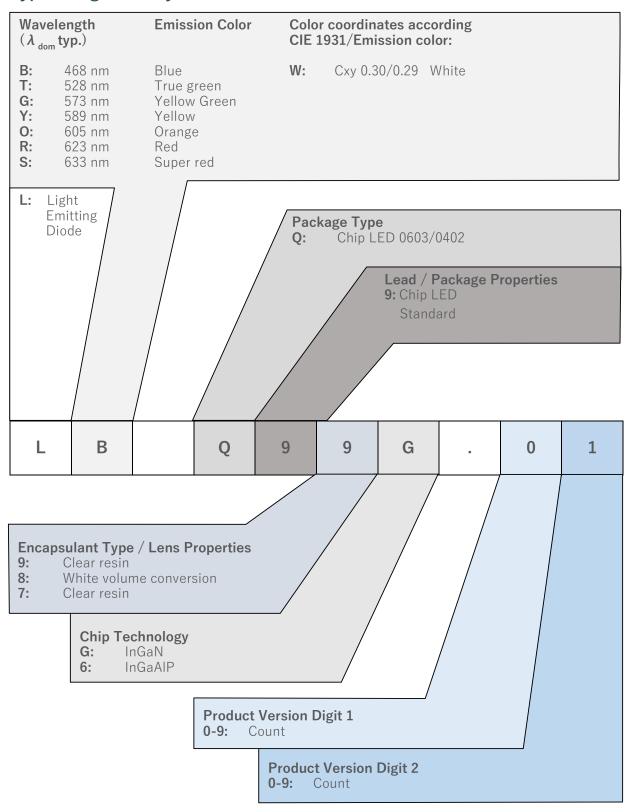



Notes

The evaluation of eye safety occurs according to the standard IEC 62471:2006 (photo biological safety of lamps and lamp systems). Within the risk grouping system of this IEC standard, the device specified in this data sheet fall into the class exempt group (exposure time 10000 s). Under real circumstances (for exposure time, conditions of the eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. When looking at bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment, and even accidents, depending on the situation.

Subcomponents of this device contain, in addition to other substances, metal filled materials including silver. Metal filled materials can be affected by environments that contain traces of aggressive substances. Therefore, we recommend that customers minimize device exposure to aggressive substances during storage, production, and use. Devices that showed visible discoloration when tested using the described tests above did show no performance deviations within failure limits during the stated test duration. Respective failure limits are described in the IEC60810.

For further application related information please visit https://ams-osram.com/support/application-notes



Disclaimer

Attention please!

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version on our website.

Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Product and functional safety devices/applications or medical devices/applications

Our components are not developed, constructed or tested for the application as safety relevant component or for the application in medical devices.

Our products are not qualified at module and system level for such application.

In case buyer – or customer supplied by buyer – considers using our components in product safety devices/ applications or medical devices/applications, buyer and/or customer has to inform our local sales partner immediately and we and buyer and /or customer will analyze and coordinate the customer-specific request between us and buyer and/or customer.



Glossary

- Brightness: Brightness groups are tested at a current pulse duration of 25 ms and a tolerance of ±11 %.
- 2) Reverse Operation: This product is intended to be operated applying a forward current within the specified range. Applying any continuous reverse bias or forward bias below the voltage range of light emission shall be avoided because it may cause migration which can change the electro-optical characteristics or damage the LED.
- 3) Wavelength: Wavelengths are tested at a current pulse duration of 25 ms and a tolerance of ±1 nm.
- 4) Forward Voltage: Forward voltages are tested at a current pulse duration of 1 ms and a tolerance of ±0.1 V.
- 5) Thermal Resistance: Rth max is based on statistic values (6 σ) used for Derating.
- 6) Typical Values: Due to the special conditions of the manufacturing processes of semiconductor devices, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.
- Characteristic curve: In the range where the line of the graph is broken, you must expect higher differences between single devices within one packing unit.
- Tolerance of Measure: Unless otherwise noted in drawing, tolerances are specified with ±0.1 and dimensions are specified in mm.
- 9) Tape and Reel: All dimensions and tolerances are specified acc. IEC 60286-3 and specified in mm.

LS Q976.01 DATASHEET



Revision History

Version	Date	Change
1.0	2023-08-29	Initial Version



EU RoHS and China RoHS compliant product 此产品符合欧盟 RoHS 指令的要求; 按照中国的相关法规和标准, 不含有毒有害物质或元素。

Published by ams-OSRAM AG

Tobelbader Strasse 30, 8141 Premstaetten, Austria Phone +43 3136 500-0 ams-osram.com © All rights reserved





Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ams OSRAM:

LS Q976.01-N1Q2-1