


PFA / FEP Lined 2 Piece Ball Valve

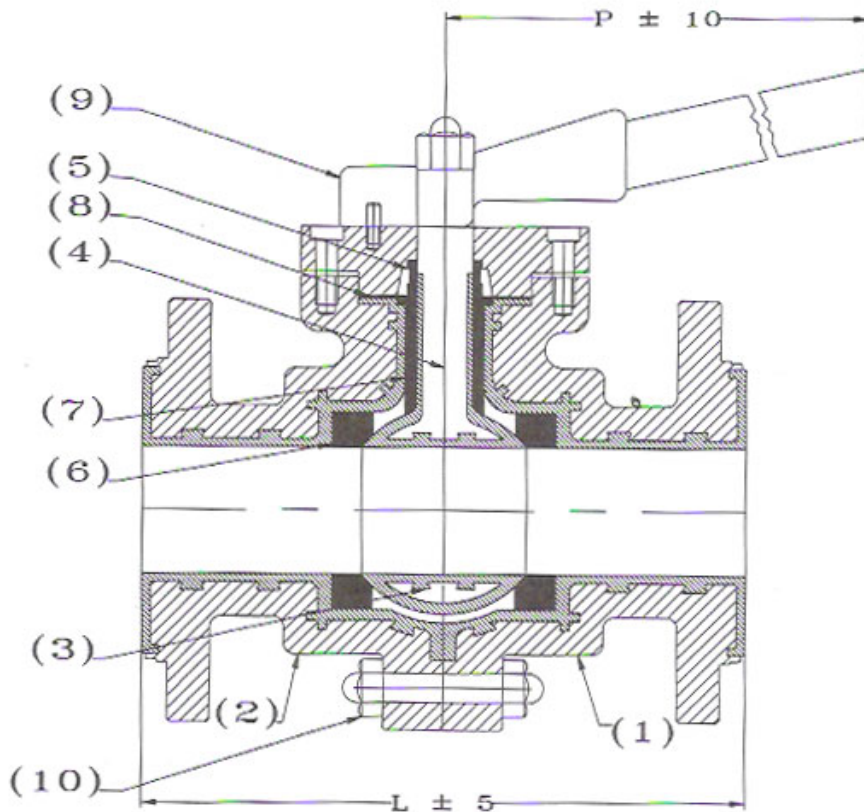

For General specifications please refer, to page nos. 2 & 3

For Installations and Maintenance Instructions, please refer to page no. 4

Dimension Chart (All Dimensions are in mm)

Length of valve as per BS 5351 short pattern.

Size	15	20	25	40	50	65	80	100	150
L(±5)	108	118	127	165	178	190	203	229	267
P(±10)	200	200	250	250	300	325	350	350	400

Bill of Material

Sr.	Part Name	Material
1.	Side Piece	Graded CI / DI / WCB / SS + PFA/FEP Lined
2.	Side Piece	Graded CI / DI / WCB / SS + PFA/FEP Lined
3.	Ball	DI / WCB / SS + PFA/FEP Lined
4.	Stem	DI / WCB / SS + PFA/FEP Lined
5.	Gland	DI / WCB / SS
6.	Seat Ring	PTFE
7.	Gland Packing	PTFE
8.	Gland Washer	SS
9.	Cap & Handle	MS
10.	Fasteners	MS / SS

Office : 5 & 6, Radha Dalvi Nagar, C.P.Road, Kandivali (East), Mumbai - 400 101. INDIA.

Email : sandogroup@mtnl.net.in * sandogroup@gmail.com * sando@bom5.vsnl.net.in

URL : www.sandogroup.com



PFA / FEP Lined 2 Piece Ball Valve	
General Specifications :-	
<u>Service Temperature:</u> <ul style="list-style-type: none">➤ PFA : 260° C➤ FEP : 205° C	
<u>Lining Thickness:</u> <ul style="list-style-type: none">➤ Minimum 3.00 mm over all wetted parts.	
<u>Test Pressure:</u> <ul style="list-style-type: none">➤ Body Test : 15 Kg/Cm² (Hydraulic)➤ Seat Test : 10 Kg/Cm² (Hydraulic)	
<u>Die Electric Spark Test:</u> <ul style="list-style-type: none">➤ 10 KV DC	
<u>Made as per Standard:</u> <ul style="list-style-type: none">➤ Length of Ball Valve : As per Manufacturer's Std.	