


Features of 'SANDO' Sight Glass Valve

- 3-Piece rigid-design.
- Available with plain Borosil tube section glass for low pressure & Colored glass for high pressure application.
- Available with various elastomer seat to handle aggressive chemicals.
- Available with various face to face length as per DIN & B.S. and all type of flg drilling.

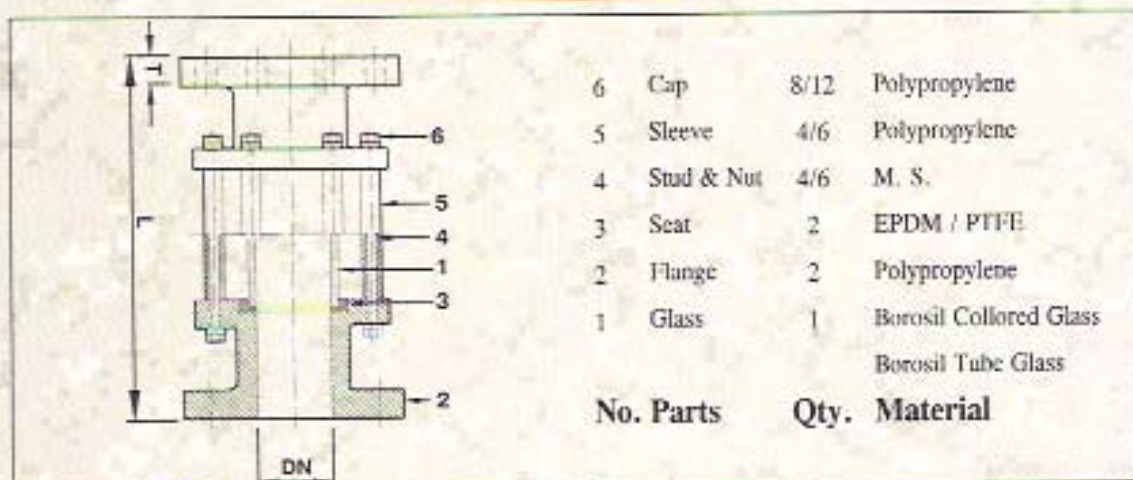

SIZE	DN	*PN	** Kv Value Lit. /min $\Delta P = 1 \text{ bar}$	L	T	Weight Kg.
25	25.4	10	40	150	16.0	0.500
32	31.8	10	80	175	17.0	0.950
40	38.1	10	130	175	17.0	0.950
50	50.8	10	170	180	19.0	1=400
65	63.5	10	310	241	23.0	2=400
80	76.2	10	400	241	23.0	2=400
100	101.6	10	700	350	23.0	3=900
150	152.4	10	1075	480	29.0	7=600


All dimensions are in mm.

* PN = Pressure Rating.

** Kv = Value of Flow Characteristic.

*** CV Value = No. of U.S. gallons per minute of Water that will flow through valve with one psi pressure drop (1 U.S. gal. = 3.78 liters).

Pressure Temperature Diagram

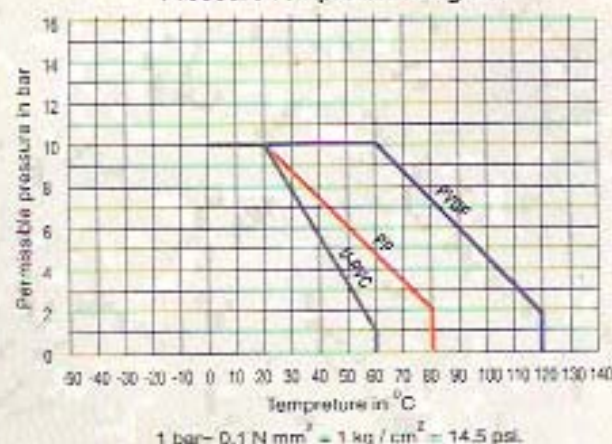

Manufacturer's Liability :

- Manufacturer will not be liable for any property loss, damage or personal injury or incidental or consequential damages of any kind weather based upon warranty, contract or negligence arising connection with design, manufacture, sale and use of this product.
- No guarantee is claimed for the technical information contained in this leaflet. It has been published for primary information purpose.
- Specifications & Dimensions subject to change without notice due to, continuous research and development for technological improvement.