


PFA / FEP Lined Lever Operated Wafer Type Butterfly Valve

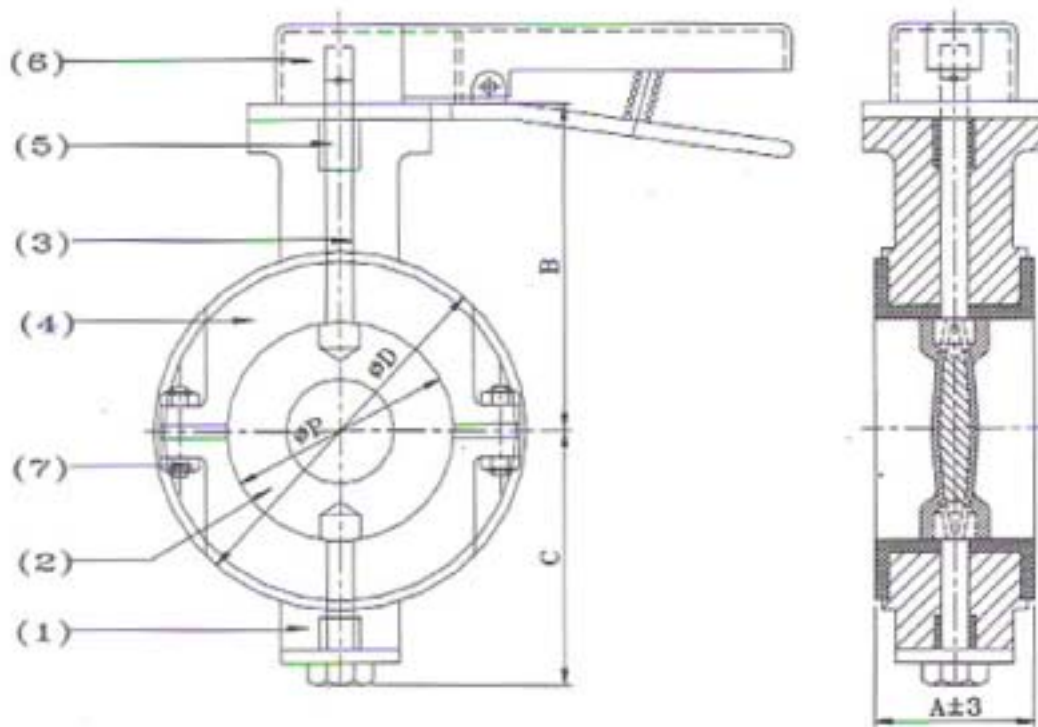

For General specifications, please refer to page nos. 2 & 3

For Installations and Maintenance Instructions, please refer to page no. 4

Dimension Chart (All Dimensions are in mm)

Size	50	65	80	100	125	150
ØP(±3)	50	65	76	100	125	150
ØD(±5)	95	110	136	170	200	220
A(±3)	39	41	42	50	54	54
B(±7)	132	135	125	135	170	180
C(±7)	80	80	85	108	130	138

Bill of Material

Sr.	Part Name	Material
1.	Body	Graded CI / DI / WCB / SS
2.	Disc	SS 304 / 316 + PFA/FEP lined
3.	Spindle (Integral Disc)	SS 304 / 316
4.	Seat	PTFE
5.	Bearing Bush	PTFE
6.	Lever	MS Fabricated
7.	Fasteners	MS / SS

Office :- 5 & 6, Radha Dalvi Nagar, C. P. Road, Kandivali, Mumbai - 400 101, INDIA.

Email ID :- sandogroup@gmail.com / sandogroup@mtnl.net.in

Telephone :- 022 -2887 5456, 2887 0347. Fax :- 022 - 2887 1214.

Website :- www.sandogroup.com

PFA / FEP Lined Lever Operated Wafer Type Butterfly Valve

General Specifications :-

Service Temperature:

- PFA : 260° C
- FEP : 205° C

Lining Thickness:

- Minimum 3.00 mm over all wetted parts.

Test Pressure:

- Body Test : 10 Kg/Cm² (Hydraulic)
- Seat Test : 10 Kg/Cm² (Hydraulic)

Die Electric Spark Test:

- 10 KV DC

Made as per Standard:

- Length of Lever Operated Butterfly Valve : As per Manufacturer's Std.