

HO CHI MINH CITY, UNIVERSITY OF TECHNOLOGY
DEPARTMENT OF COMPUTER SCIENCE AND ENGINEER



Application Based Internet of Things Report - LAB 2B

Student: Nguyễn Hữu Lợi

ID: 1914047

HỒ CHÍ MINH CITY




Content

1	Introduction	2
2	Requirements	2
2.1	Screen 1	2
2.2	Screen 2	2
2.3	Advance UI elements	3
3	Report	4
3.1	Screen 1	4
3.2	Screen 2	5
3.3	Github link	5
4	Demo point	5

1 Introduction

In this second LAB, students are proposed to create a simple dashboard using Unity 3D editor. Basically, the dashboard has 2 screens (GUIs), as depicted following:

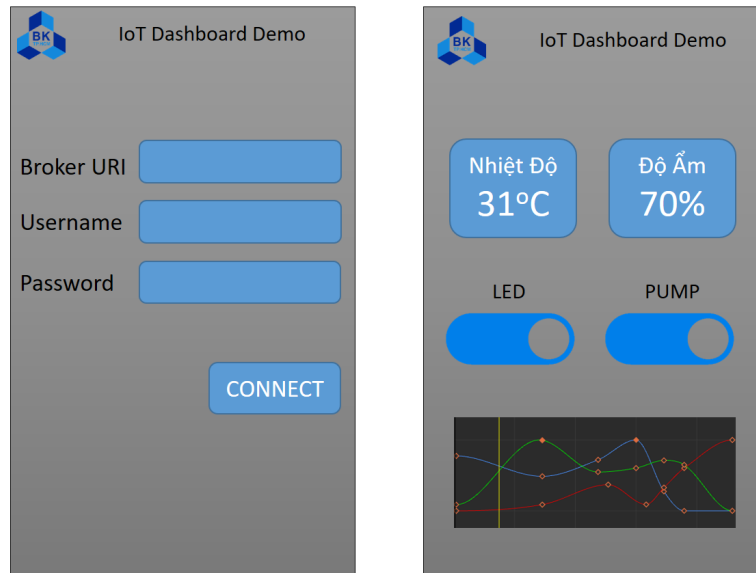

Hình 1: *Software mockup GUI*

The source code of the second LAB is also required to publish in your Github. The details are described in the next section of this report.

2 Requirements

2.1 Screen 1

There are 3 input fields, including the broker of the server, username and password. Using Thingsboard server, the broker should be demo.thingsboard.io, the username is your access token and the password is empty.

The values of these fields can be set by default (in the design phase, by setting the text property of the input component).

When the CONNECT button is pressed, the app will connect to the server. If there is an error, a simple textview can be used to display this error. Otherwise, the second UI is launched.

The testing account for this app **bk**iot and **12345678** for the username and password. The broker URI is **mqttserver.tk**. The default port is **1883**.

2.2 Screen 2

The app needs to subscribe to the following topic

bkiot/1914047a/status

in order to receive the current values of sensors (e.g. temperature and humidity) and update these values on textviews. Students can change the information according to their use cases. However, at least 2 different information of the sensors are required.

Two toggle buttons are required to controll two different devices (e.g. a simple LED or a PUMP). When the button is clicked, the data is published to

/bkiot/1914047a/led

for the LED and

/bkiot/1914047a/pump

for the PUMP.

The data for each button is a json string, described as follow:


- {"device":"LED","status":"ON"}
- {"device":"PUMP","status":"OFF"}

2.3 Advance UI elements

The end of the second is an example of an advance eleement in Unity3D. It can be a graph, a gauge or a map. This part is the extra point in this lab.


3 Report

3.1 Screen 1

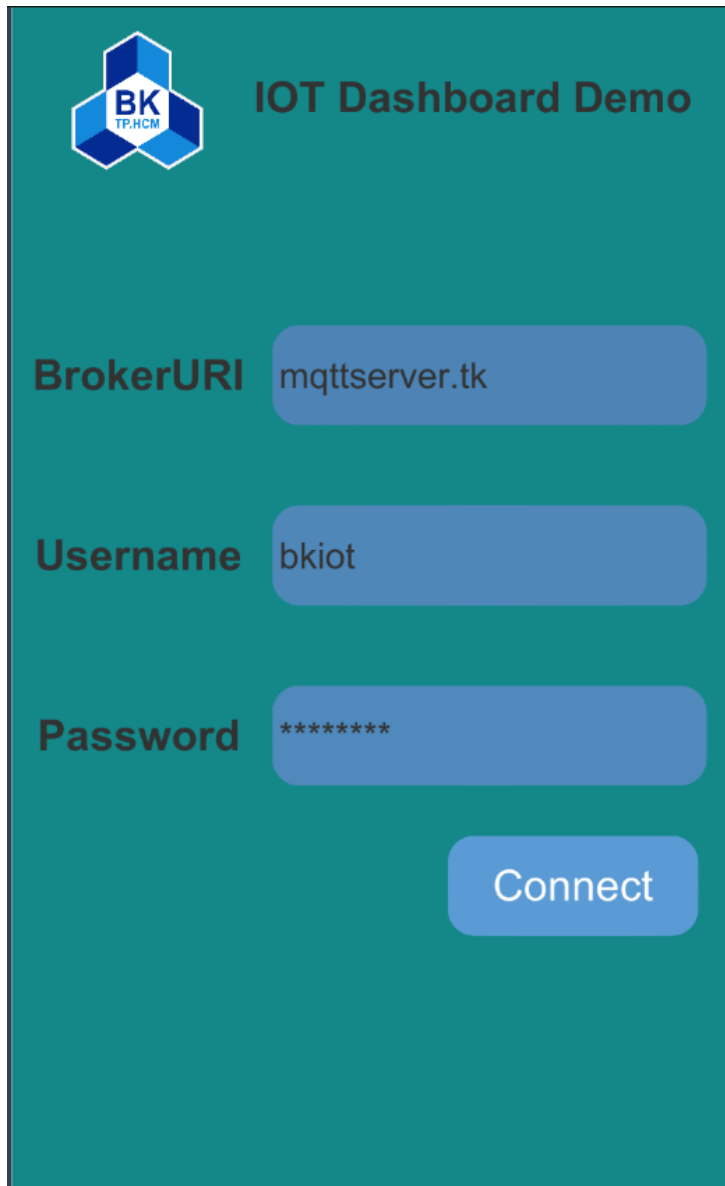

The screenshot shows a teal-colored interface for an "IOT Dashboard Demo". In the top left corner is a logo consisting of three blue hexagons with the text "BK TP.HCM" in the center. To the right of the logo, the title "IOT Dashboard Demo" is displayed in a bold, dark font. Below the title, there are three input fields, each with a label to its left: "BrokerURI" with the value "mqttserver.tk", "Username" with the value "bkiot", and "Password" with the value "*****". All input fields have a light blue rounded rectangular background. At the bottom right of the form is a light blue rounded rectangular button with the text "Connect" in white.

3.2 Screen 2

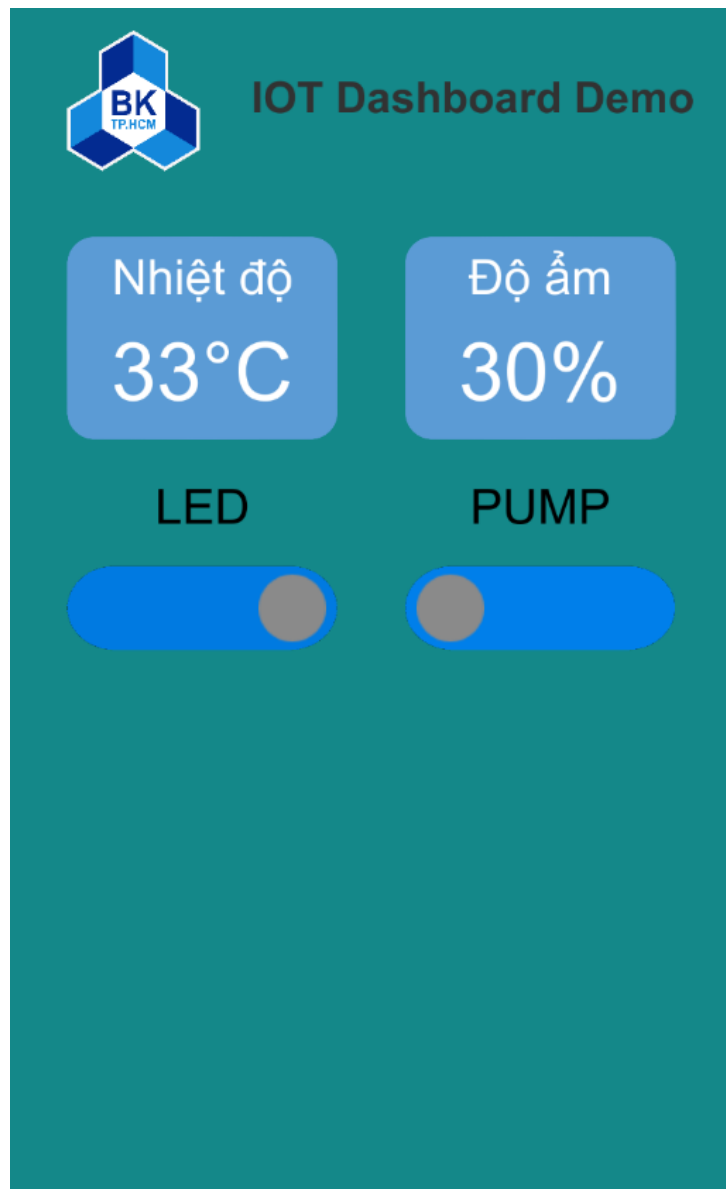

3.3 Github link

https://github.com/loiprocute/Lab2_IOT.git

4 Demo point

There is a session for live demo. A short meeting for each student will be taken place at google meet. The schedule for this meeting will be available soon.