




M20 8.8 in 22 round holes, snug tight, PLAIN plates (no slots); FP1 bolts e 40 / p 70. FP1 at every rafter / primary junction; FP2 (2 x M20, p2 60) where the rafter is a strip chord: R1, R3, R9, R11; R5 strut splice FP1 (0.55). Web bearing on the 6.2 mm IPE 240 web governs: 64.6 kN per M20 (one row), 54.8 kN (two rows); max gravity reaction 21.3 kN (0.29). Force passes plate - weld - primary web - plate.

D1	FIN PLATES	scale 4x	D2	CAP PLATE	scale 4x
S04	FP1 100x150x10 2 M20 8.8; FP2 160x150x10 2x2 M20 (p2 60) at the strip-chord splices R1/R3/R9/R11; IPE 240 to IPE 300 web		S04	HEA 140 cap plate 200x280x20, a6 all round; 4 M20 8.8 through the IPE 300 bottom flange, gauge 90, pitch 200 (nuts clear the rafter flange)	

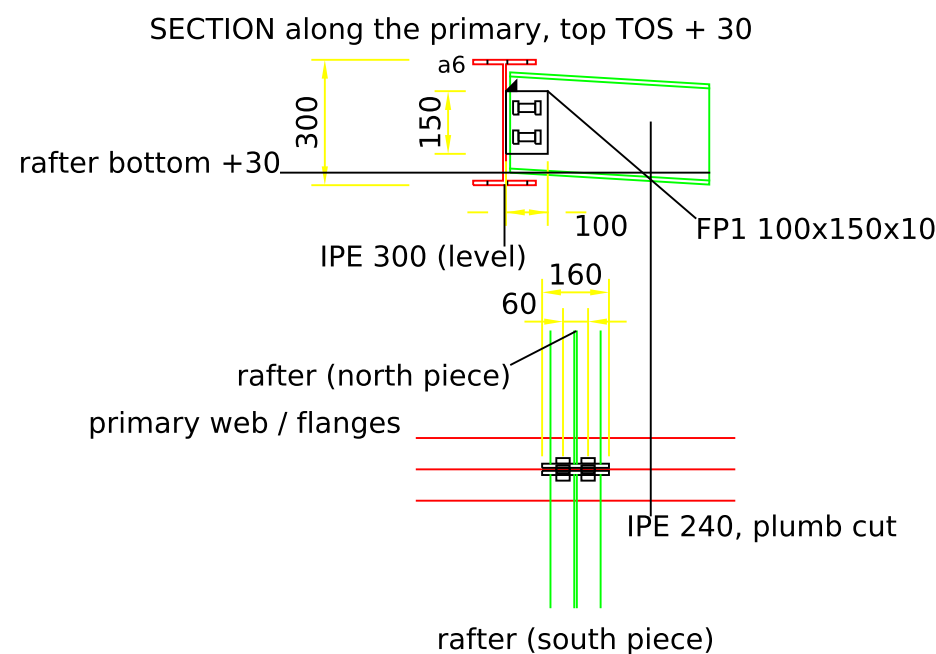