

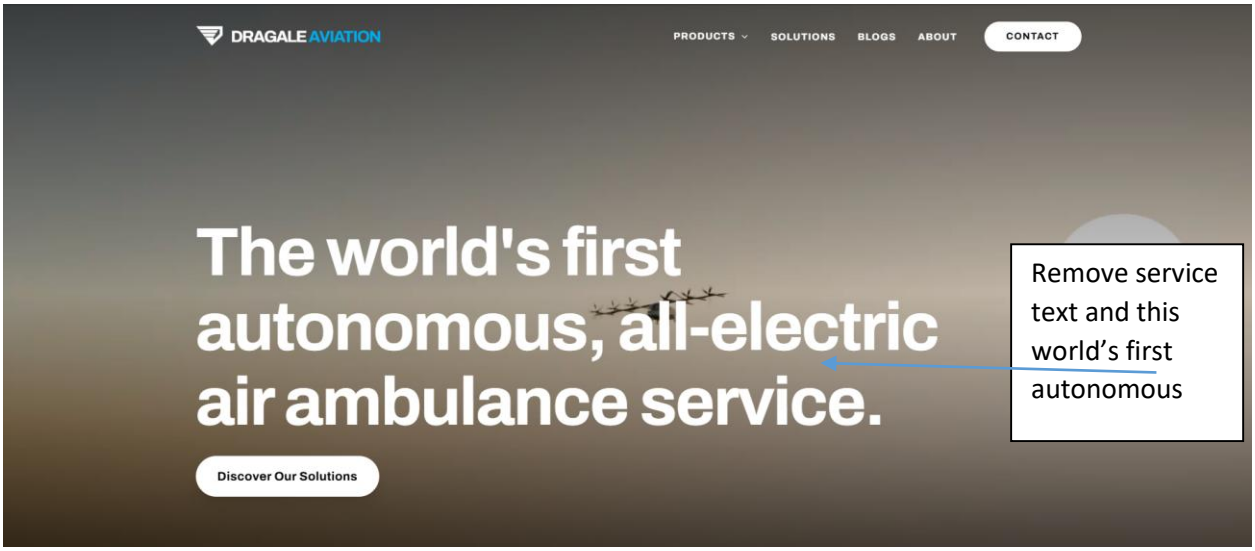


Remove service text and this world's first autonomous

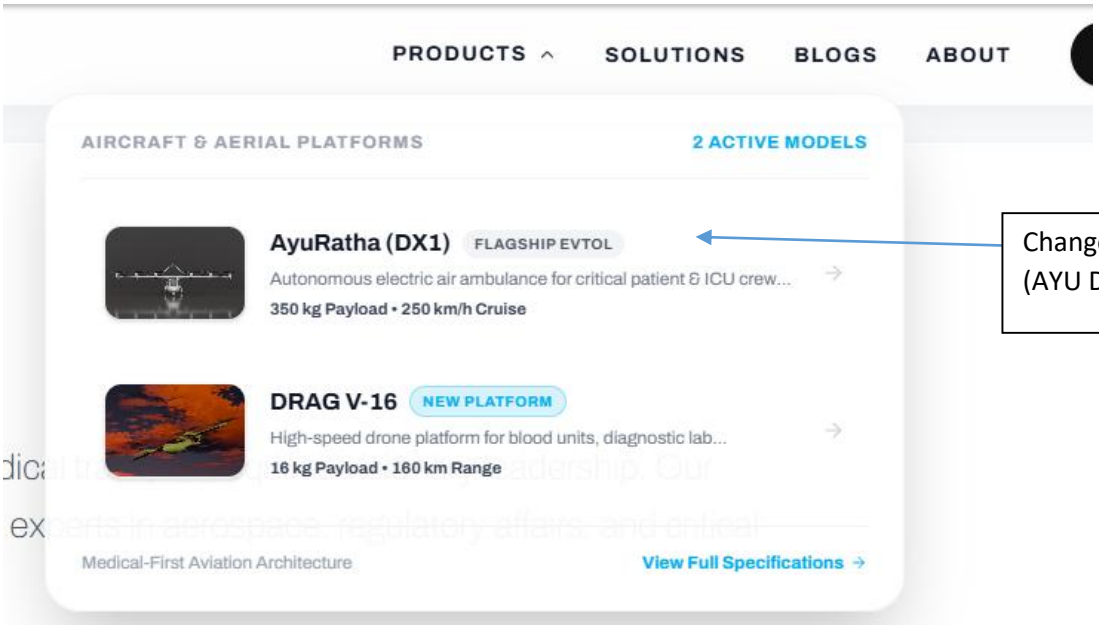

Change name (AYU DX2)

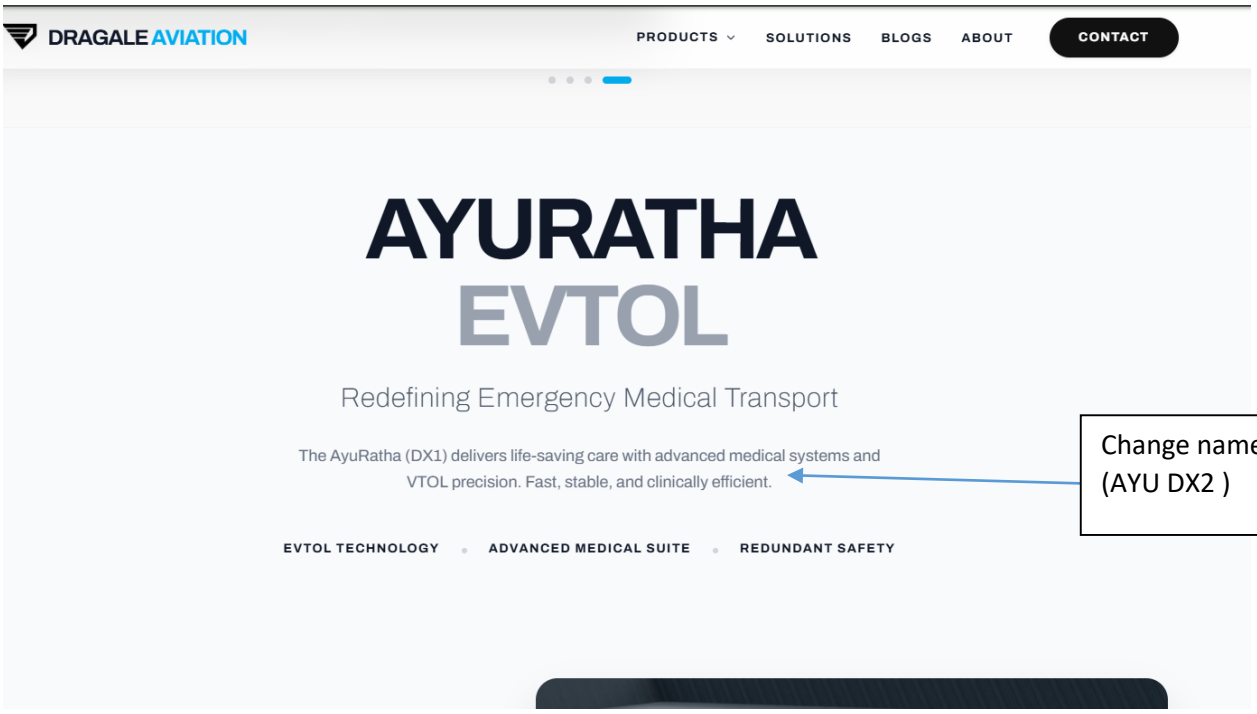

Change name (AYU DX2)

DRAGALE AVIATION

PRODUCTS SOLUTIONS BLOGS ABOUT CONTACT

Pioneering India's first eVTOL air ambulance for rapid, safe, and innovative critical care.

SPEED (200 KM/H) • RANGE (150 KM) • ADVANCED MEDICAL CAPABILITIES


Change the AI generated images into real image as we provided in (SOLUTION SECTION)

Seamless VTOL Patient Transport

Our eVTOL design enables vertical takeoff and landing, ensuring rapid access to remote or congested areas for seamless patient transport.

LEARN MORE





16 kg Dedicated

+2°C to +8°C

CARGO SECURITY
Dual Electro-Lock


DIGITAL CUSTODY
Live RFID & QR

STRUCTURAL AERO STABILITY

Twin-Boom H-Tail & High-Wing Aerodynamics

The twin-boom H-tail layout isolates control surfaces from fuselage prop wash, maintaining exceptional pitch and yaw authority even during severe monsoon gusts and turbulent city canyons. High-wing placement guarantees ample ground clearance on unpaved helipads.

- **Full Carbon Prepreg Unibody:** High torsional rigidity with 30 kg empty airframe weight.
- **Distributed Electric Propulsion:** High-efficiency direct-drive brushless motors for ultra-low acoustic signature.
- **All-Weather Flight Validation:** Operable in rain, heat, and high-altitude mountain winds across India.

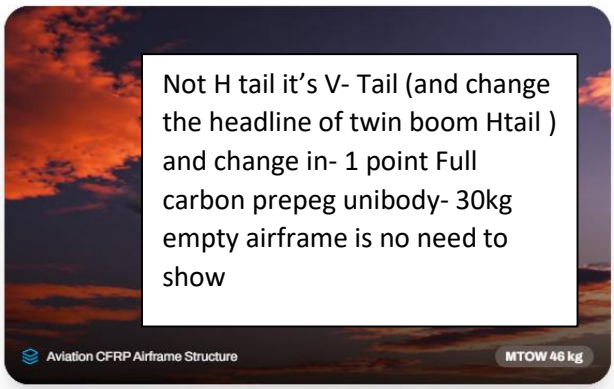

Not H tail it's V- Tail (and change the headline of twin boom Htail) and change in- 1 point Full carbon prepeg unibody- 30kg empty airframe is no need to show

AIRCRAFT MODEL	DRAG V-16
MANUFACTURER	Dragale Aviation Private Limited
AIRCRAFT TYPE	Fixed-Wing Autonomous UAV
PRIMARY APPLICATION	Medical Logistics & Cold-Chain Delivery
PAYLOAD CAPACITY	16 kg (Medical Cargo)
MAX TAKE-OFF WEIGHT (MTOW)	46 kg
EMPTY WEIGHT	30 kg
OPERATING RANGE	160 km
FLIGHT ENDURANCE	1 Hour (Full Mission Profile)
CRUISING SPEED	160 km/h
OPERATING ALTITUDE	400 ft AGL

Remove the Empty weight section

CRUISING SPEED	160 km/h
OPERATING ALTITUDE	400 ft AGL
WING CONFIGURATION	High-Wing Cantilever Design
TAIL CONFIGURATION	Twin-Boom H-Tail Stabilizer
PROPULSION	100% Electric Direct-Drive Motors
THERMAL PAYLOAD BAY	Active Regulation (+2°C to +8°C / -20°C)
NAVIGATION & FAILSAFES	Triple RTK-GNSS, 5G LTE, RTL & Parachute

Remove wing configuration and tail configuration Remove thermal payload bay section and navigation section completely

Dragale Aviation Website — Final Revision Requirements

Website: https://dragale-aviation.vercel.app/

1. Homepage

Company positioning

Dragale Aviation is an aerospace company developing UAV and eVTOL platforms for medical logistics and emergency air ambulance applications.

Use separate sections for our two development programmes:

- **DRAG V-16:** Fixed-wing UAV for medical logistics.
- **AYUDX2:** eVTOL air ambulance under development.

Do not imply that either platform is certified, commercially operational or flight-proven unless the relevant evidence is available.

2. AYUDX2 eVTOL Air Ambulance

Product heading: AYUDX2 — eVTOL Air Ambulance

Description:

AYUDX2 is Dragale Aviation's eVTOL air ambulance programme, designed around the requirements of emergency medical transportation. The aircraft is being developed to support the aerial transportation of patients and medical personnel, with a focus on dedicated medical missions and integration of patient-care requirements into the aircraft design.

Required corrections:

- Remove all references to autonomous operation or autonomous air ambulance capabilities.
- Remove all claims that AYUDX2 is the world's first eVTOL air ambulance.
- Describe the aircraft as under development.
- Do not claim certification, operational readiness or demonstrated performance without supporting evidence.
- Retain the supplied aircraft renders, ensuring that they accurately represent the current design.

3. DRAG V-16 Medical Logistics UAV

Product heading: DRAG V-16 — Fixed-Wing UAV for Medical Logistics

Description:

DRAG V-16 is a fixed-wing unmanned aerial vehicle being developed by Dragale Aviation for medical logistics applications. With a payload capacity of 16 kg, it is designed to support the transportation of essential medical supplies between hospitals, diagnostic laboratories, blood banks and healthcare facilities.

Medical applications:

- Blood and blood products
- Diagnostic laboratory samples
- Vaccines
- Medicines and pharmaceutical supplies
- Emergency medical supplies
- Healthcare logistics between facilities

Technical specifications:

Parameter	Value
Aircraft type	Fixed-wing UAV
Payload capacity	16 kg
Maximum take-off weight	46 kg
Range	160 km
Endurance	1 hour
Cruise speed	160 km/h
Operating altitude	400 ft
Wing configuration	High-wing
Tail configuration	V-tail
Propulsion	Electric

Required corrections:

- Change the tail configuration from twin-boom H-tail to V-tail.
- Do not display wingspan.
- Do not use the word “target” in the public-facing product copy.
- Do not claim DGCA certification, operational deployment or guaranteed delivery times without evidence.

- Do not promise temperature-controlled transportation unless the relevant packaging and thermal-control arrangements have been validated.

Do not imply that every listed system is fully implemented, validated or operational.

5. Website-wide review

Review all homepage copy, product pages, headings, image captions, animations, metadata and calls to action for the following:

- Unsupported “world's first” or similar superlative claims.
- Incorrect references to autonomous eVTOL operations.
- Incorrect UAV tail configuration.
- Unsupported claims about certification, safety, flight testing or commercial deployment.
- Inconsistent aircraft names and technical specifications.
- Any mismatch between the supplied renders and the current aircraft designs.

Maintain a professional aerospace-industry tone, with separate and clearly identifiable UAV and eVTOL product programmes.