

QEMU (Win-2)



```
C:\WINDOWS\system32\cmd.exe
Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address . . . . . : 15.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 15.0.0.1

C:\Documents and Settings\user>ping 162.14.0.10

Pinging 162.14.0.10 with 32 bytes of data:

Reply from 162.14.0.10: bytes=32 time=2ms TTL=124
Reply from 162.14.0.10: bytes=32 time=1ms TTL=124
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124
Reply from 162.14.0.10: bytes=32 time=3ms TTL=124

Ping statistics for 162.14.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>
```



Start | C:\WINDOWS\system...


8:54 AM




```
R2#
*Jul 21 07:21:06.616: %SYS-5-CONFIG_I: Configured from console by console
R2#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 20.0.0.1
S    15.0.0.0/8 [1/0] via 30.0.0.2
C    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     20.0.0.0/8 is directly connected, Ethernet0/0
L     20.0.0.2/32 is directly connected, Ethernet0/0
S    21.0.0.0/8 [1/0] via 30.0.0.2
C    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     30.0.0.0/8 is directly connected, Ethernet0/1
L     30.0.0.1/32 is directly connected, Ethernet0/1
S    162.14.0.0/16 [1/0] via 30.0.0.2
S    172.19.0.0/16 [1/0] via 30.0.0.2
S    192.168.168.0/24 [1/0] via 30.0.0.2
R2#^Z
```

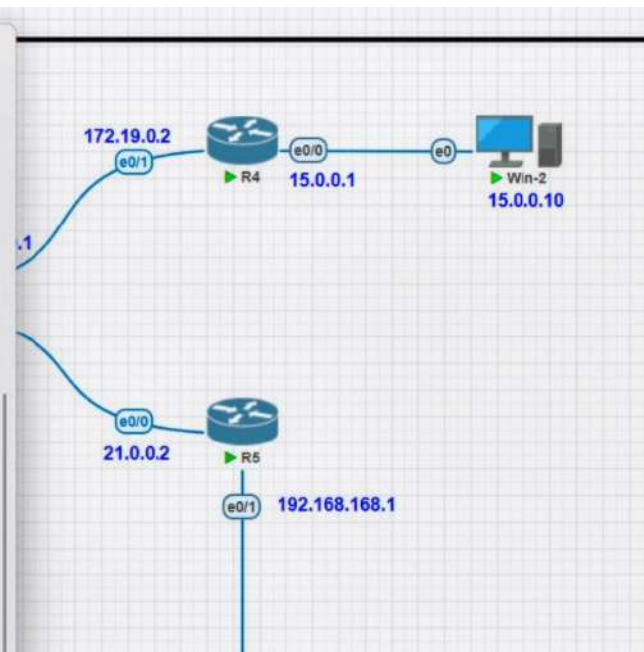

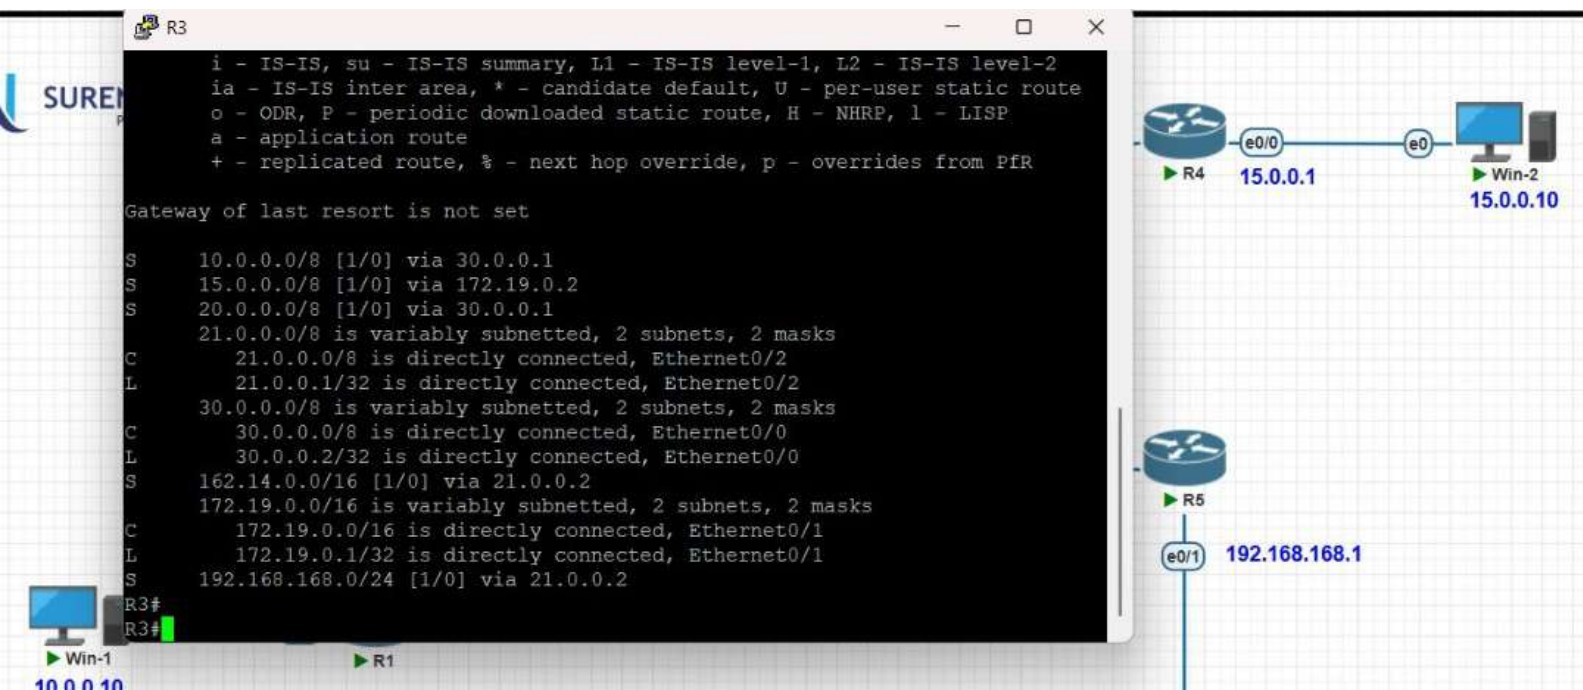


```
R6
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 10.0.0.0/8 [1/0] via 192.168.168.1
S 15.0.0.0/8 [1/0] via 192.168.168.1
S 20.0.0.0/8 [1/0] via 192.168.168.1
S 21.0.0.0/8 [1/0] via 192.168.168.1
S 30.0.0.0/8 [1/0] via 192.168.168.1
C 162.14.0.0/16 is variably subnetted, 2 subnets, 2 masks
  C 162.14.0.0/16 is directly connected, Ethernet0/0
  L 162.14.0.1/32 is directly connected, Ethernet0/0
S 172.19.0.0/16 [1/0] via 192.168.168.1
C 192.168.168.0/24 is variably subnetted, 2 subnets, 2 masks
  C 192.168.168.0/24 is directly connected, Ethernet0/1
  L 192.168.168.2/32 is directly connected, Ethernet0/1
R6#
```

```
graph LR
    Win1[Win-1: 10.1] --- R1[R1: 10.0]
    R1 --- R4[R4: 172.19.0.2, 15.0.0.1]
    R1 --- R5[R5: 21.0.0.2, 192.168.168.1]
    R4 --- N1((172.19.0.1))
    R4 --- N2((21.0.0.1))
    R5 --- N3((172.19.0.1))
    R5 --- N4((21.0.0.1))
```

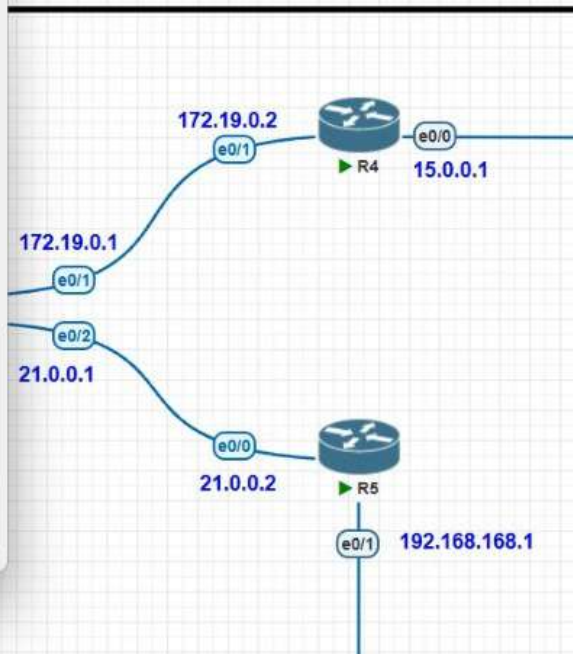

Win-1
10.0.0.10

```
R1
R1(config)#ip route 15.0.0.0 255.0.0.0 20.0.0.2
R1(config)#exit
R1#sh ip route
*Jul 21 07:17:00.887: %SYS-5-CONFIG_I: Configured from console by console
R1#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

      10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/8 is directly connected, Ethernet0/0
L       10.0.0.1/32 is directly connected, Ethernet0/0
S       15.0.0.0/8 [1/0] via 20.0.0.2
      20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Ethernet0/1
L       20.0.0.1/32 is directly connected, Ethernet0/1
S       21.0.0.0/8 [1/0] via 20.0.0.2
S       30.0.0.0/8 [1/0] via 20.0.0.2
S       162.14.0.0/16 [1/0] via 20.0.0.2
S       172.19.0.0/16 [1/0] via 20.0.0.2
S       192.168.168.0/24 [1/0] via 20.0.0.2
```

R1#
R1

400 400 400 0


```
R4
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S   10.0.0.0/8 [1/0] via 172.19.0.1
S   15.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     15.0.0.0/8 is directly connected, Ethernet0/0
L     15.0.0.1/32 is directly connected, Ethernet0/0
S   20.0.0.0/8 [1/0] via 172.19.0.1
S   21.0.0.0/8 [1/0] via 172.19.0.1
S   30.0.0.0/8 [1/0] via 172.19.0.1
S   162.14.0.0/16 [1/0] via 172.19.0.1
S   172.19.0.0/16 is variably subnetted, 2 subnets, 2 masks
C     172.19.0.0/16 is directly connected, Ethernet0/1
L     172.19.0.2/32 is directly connected, Ethernet0/1
S   192.168.168.0/24 [1/0] via 172.19.0.1
R4#
```

