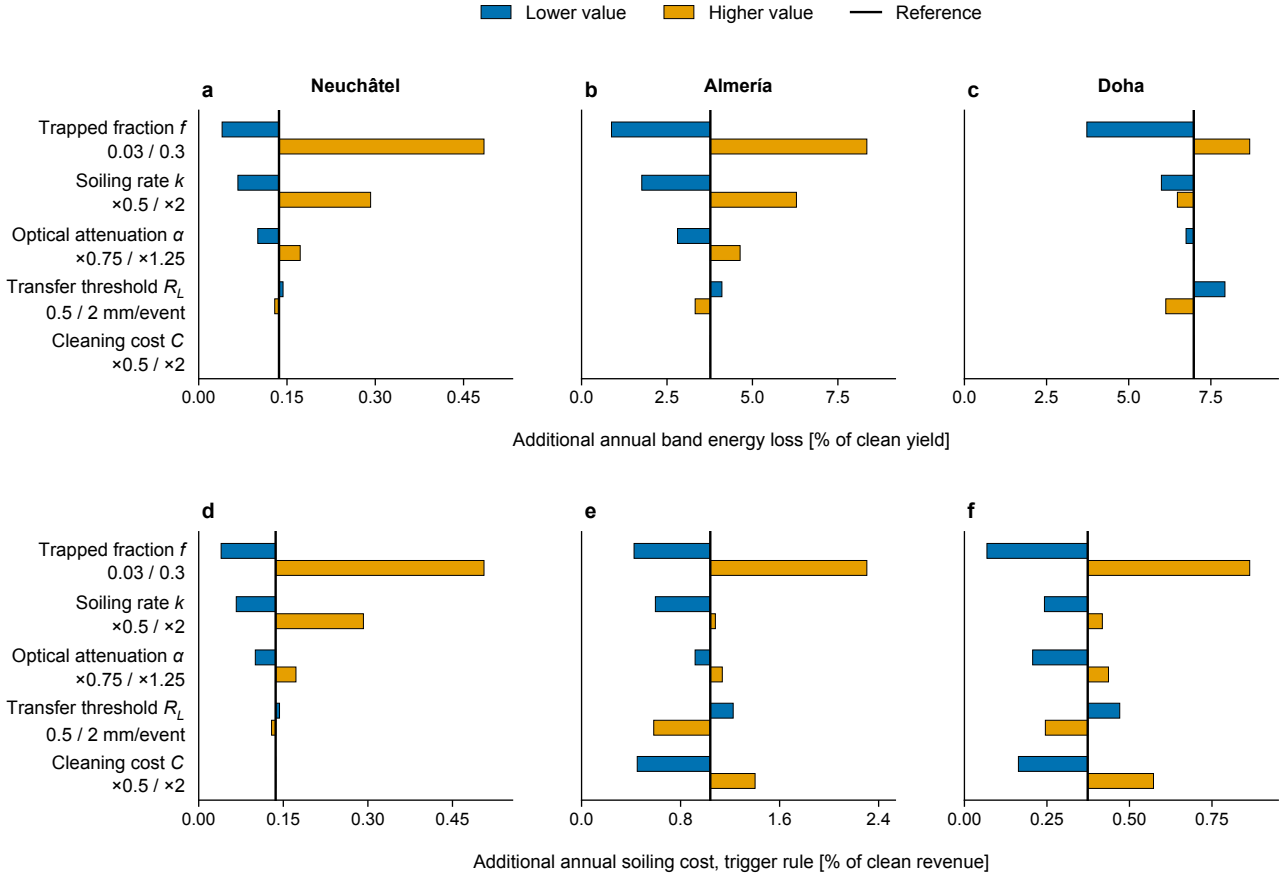
Lower value
Higher value
Reference
a
Neuchâtel
b
Almería
c
Doha
Trapped fraction f
0.03 / 0.3
Soiling rate k
×0.5 / ×2
Optical attenuation α
×0.75 / ×1.25
Transfer threshold $R_L$
0.5 / 2 mm/event
Cleaning cost C
×0.5 / ×2
0.00
0.15
0.30
0.45
0.0
2.5
5.0
7.5
Additional annual band energy loss [% of clean yield]
d
e
f
0.8
1.6
2.4
0.25
0.50
0.75
Additional annual soiling cost, trigger rule [% of clean revenue]