
USER captive / 3 standard guides - PRINCIPLE ONLY, NOT C05 positions

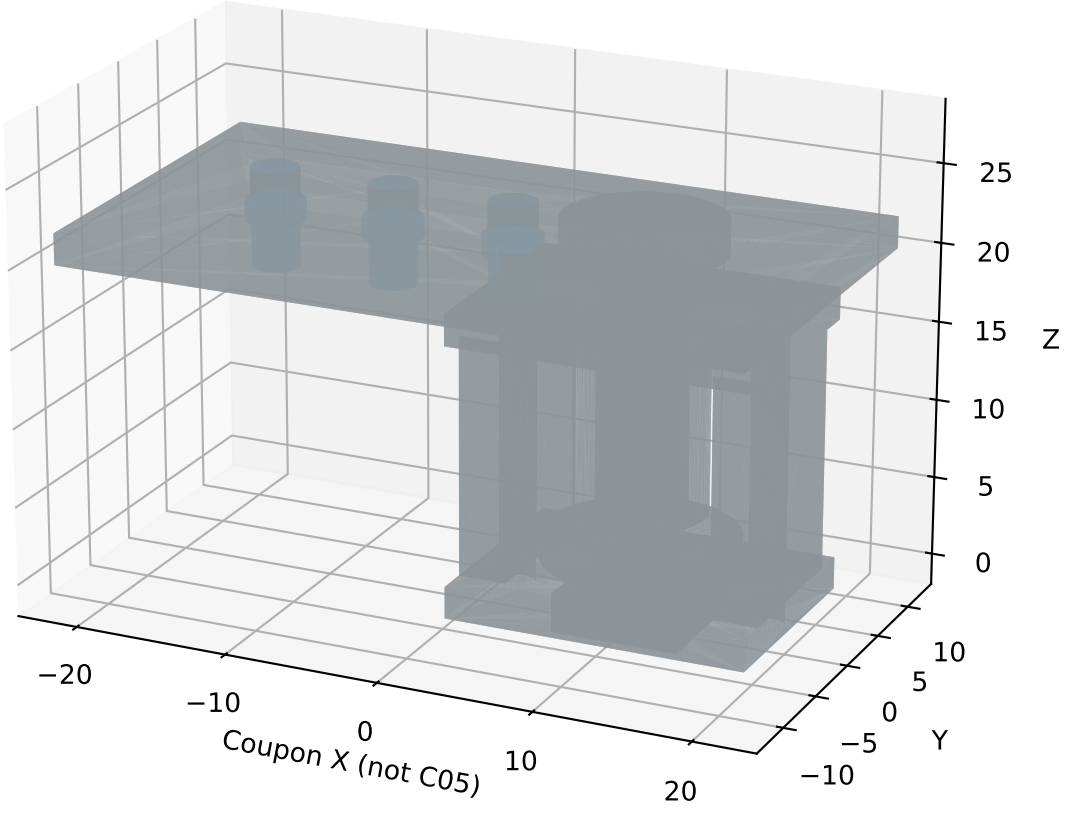

Head gap/stop1mm; tip gap0.6mm; guide diameter5.5 / shaft5.
Return spring, compliant tip, actual B1 stroke/force and optical path NOT qualified.