

Kim Bullurd, for dry surface condition

<Air-side thermal hydraulic performance of multi-louvered fin aluminum heat exchangers >

DOI:10.1016/S0140-7007(01)00025-1

Chart 1, Range of application				
FinType	FPI	Fin Height	Fin Depth	Fin Thickness
Louver Fin	18~25.4	8.15mm	16~24mm	-
AirRe	Louver Count	Louver Length	Louver Angle	Louver Pitch
100~600	8~12	6.4mm	15~29°	1.7mm

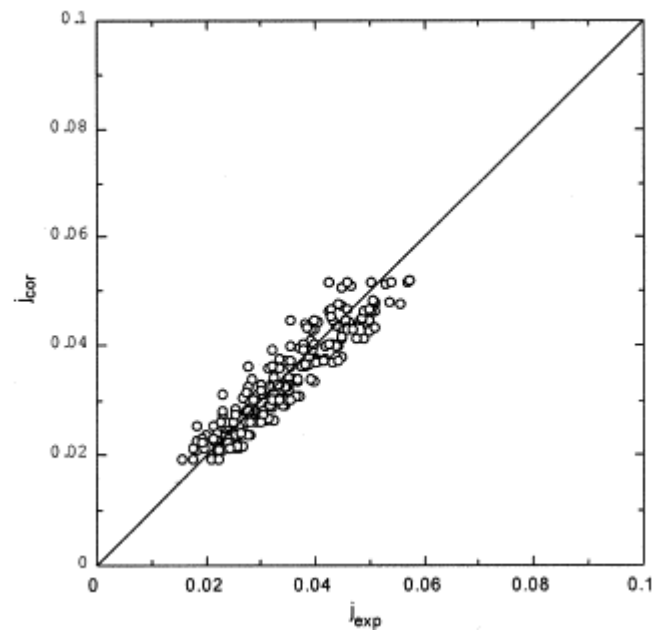


Figure 1, Comparison for j factor(45Samples,225Points, $\pm 14.5\%$ rms)

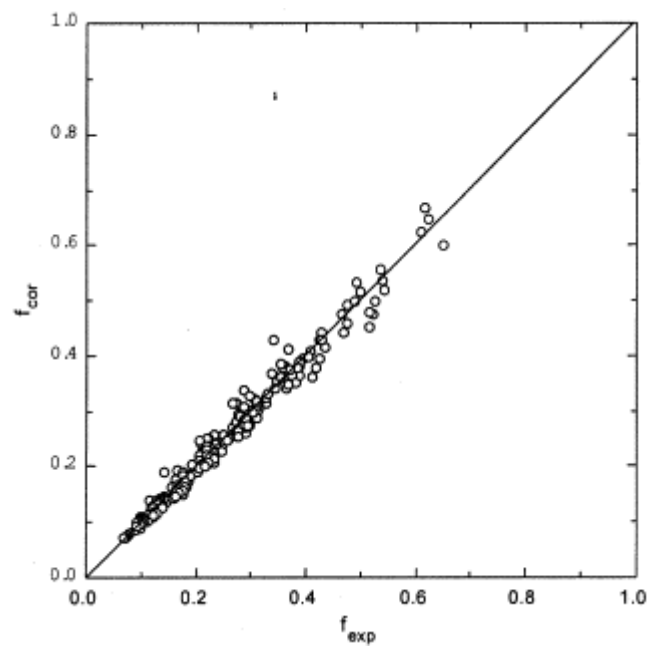


Figure 2, Comparison for f factor(45Samples,225Points, $\pm 7\%$ rms)