

Kim Bullurd, for wet surface condition

<Air-side performance of brazed aluminum heat exchangers under dehumidifying conditions>

DOI: 10.1016/S0140-7007(01)00106-2

Chart 1, Range of application				
FinType	FPI	Fin Height	Fin Depth	Fin Thickness
Louver Fin	18~25.4	8.15mm	16~24mm	-
AirRe	Louver Count	Louver Length	Louver Angle	Louver Pitch
80~300	8~12	6.4mm	15~29°	1.7mm

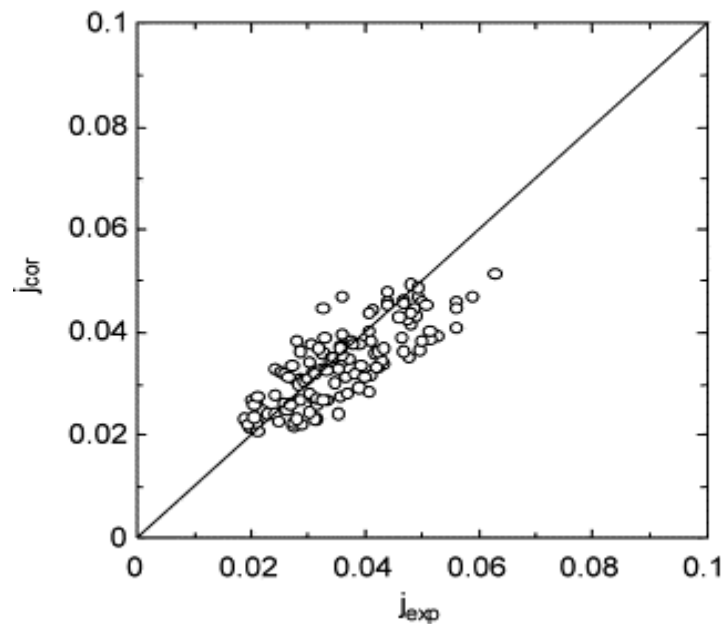


Figure 1, Comparison for j factor (30 Samples, $\pm 16.9\%$ rms)

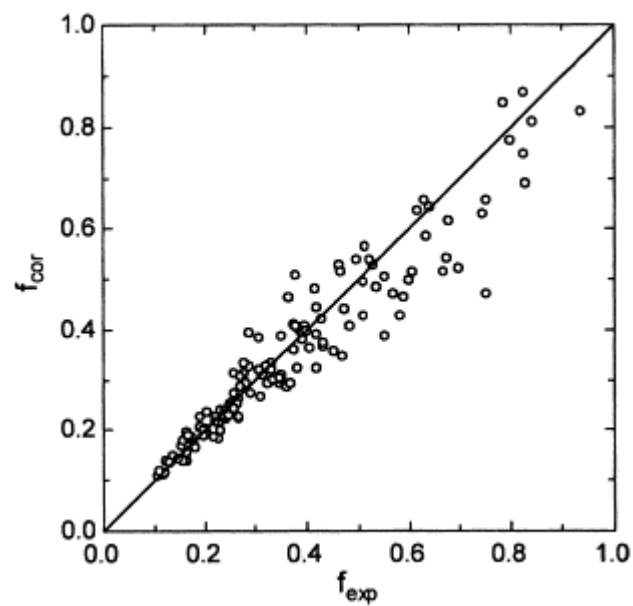


Figure 2, Comparison for f factor (30 Samples, $\pm 13.6\%$ rms)