

SanHua,cfd based,for dry surface condition

| Chart 1,Range of application |              |                 |              |               |
|------------------------------|--------------|-----------------|--------------|---------------|
| FinType                      | FPI          | Fin Height      | Fin Depth    | Fin Thickness |
| Louver Fin                   | 15.875~25.4  | 4.4~8.1mm       | 12.4~58mm    | 0.07~0.08mm   |
| AirVel                       | Louver Count | Louver Length   | Louver Angle | Louver Pitch  |
| 1~5m/s                       | 12~36        | FinH*(0.75~0.9) | 24~45°       | 0.7~1.5mm     |

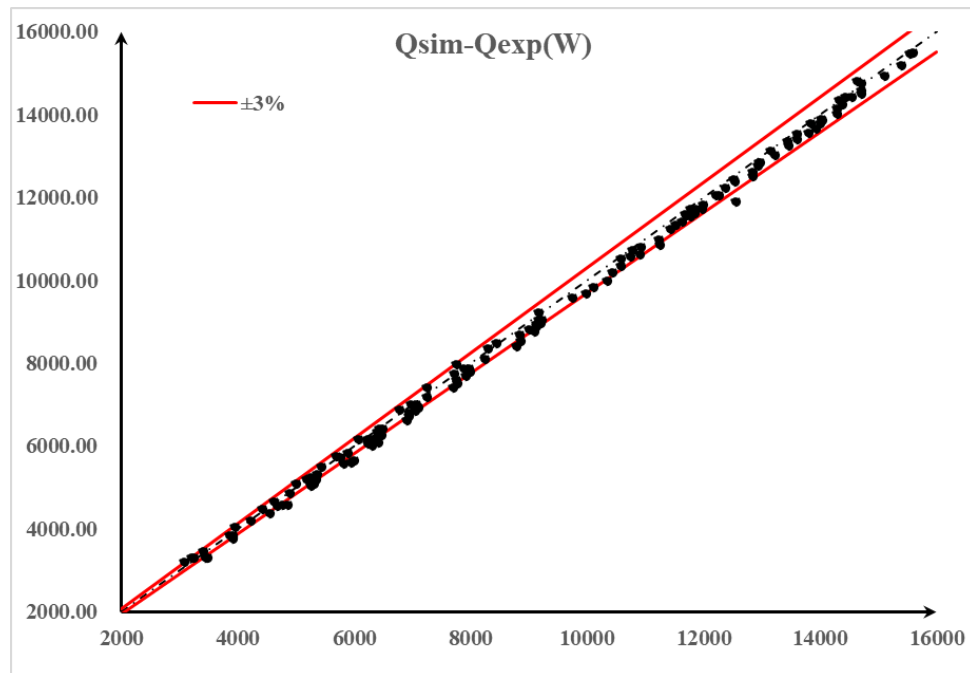


Figure 1,error plots for Heatload(12Samples,144points,82.1% datas within ±3% rms)

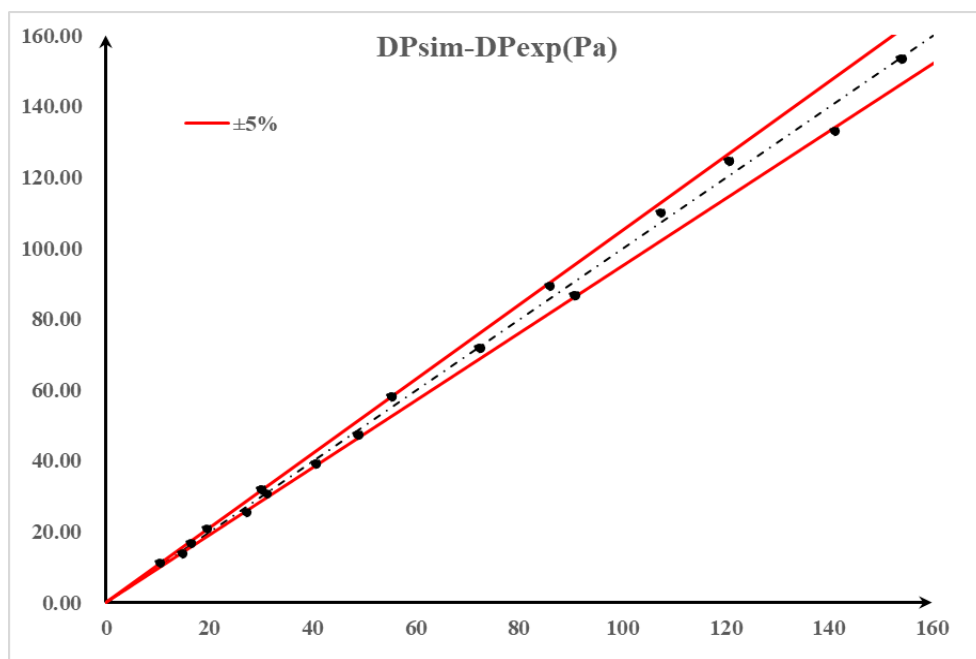


Figure 2,error plots for DP(3Samples,27points)