01 **ASSET CLEANING** — UK AND IRELAND DEALER FOR ABZ INNOVATION

Clean smarter, safer, higher

MEET THE ABZ INNOVATION C10

The C10 is a purpose-built industrial cleaning drone engineered to carry high-pressure cleaning lances to elevated surfaces while keeping all heavy equipment—pumps, hoses, and water sources—securely on the ground.

Book a demonstration →

▶ Play · Sound off · 00:00 / 01:23 · C10 Use Case Shorts · ABZ Innovation

00:07 Solar panel cleaning · 00:24 Façade cleaning · 00:41 Roof moss removal · 01:00 Gutter cleaning

01
No Scaffolding.

02
No Height Risks.

03
No Compromise.

02 **APPLICATIONS** — ABZ INNOVATION C10

Access the Inaccessible

Perfectly suitable for hard-to-reach areas where traditional machinery cannot fit.

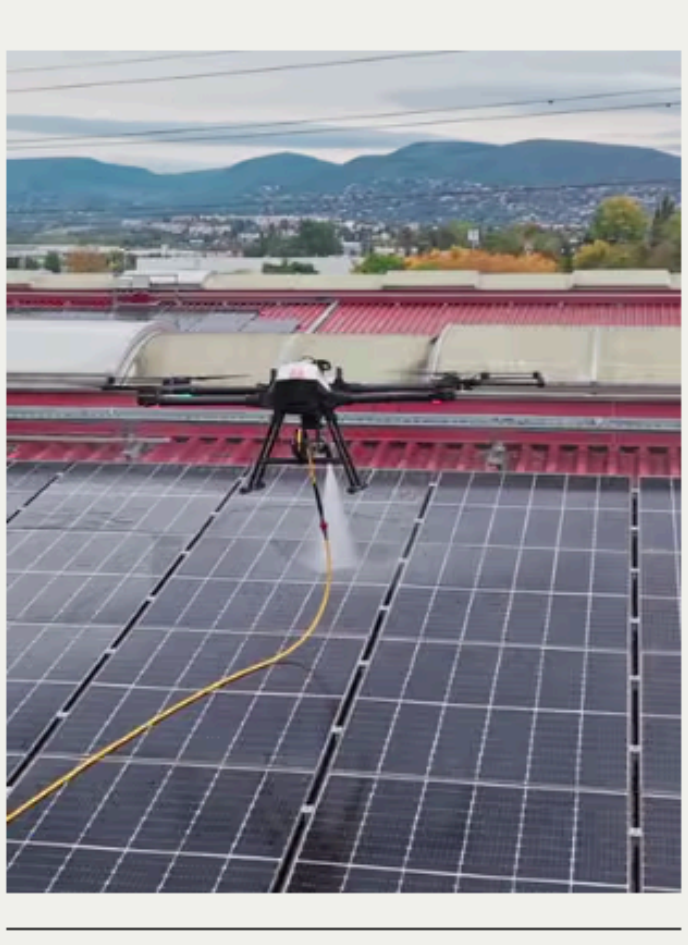

01 **Solar panel cleaning**
▶ In the film 00:07

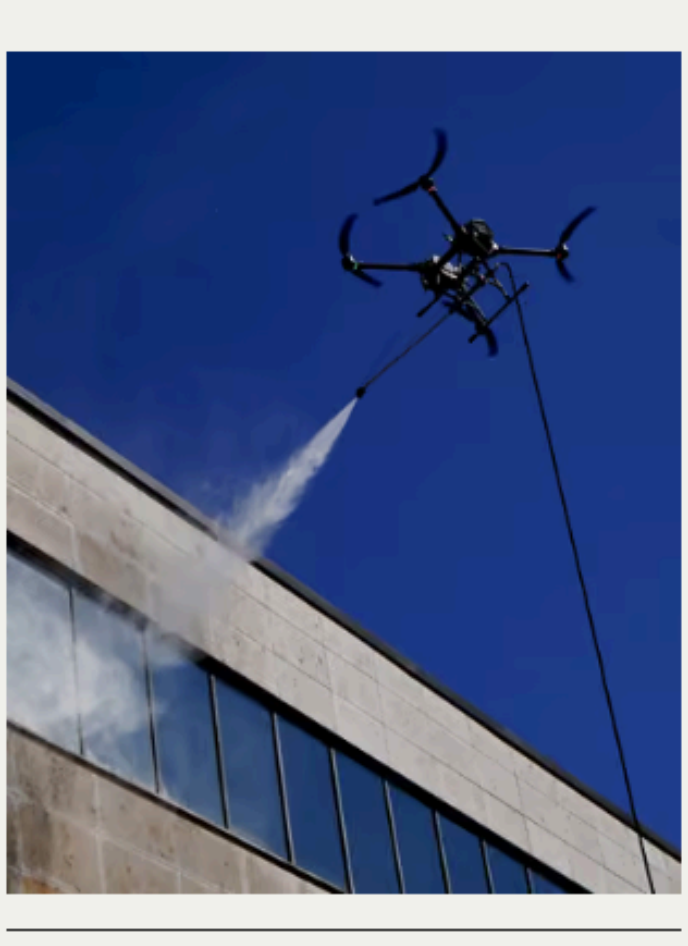

02 **Façade cleaning**
▶ In the film 00:24

03 **Roof moss removal**
▶ In the film 00:41

04 **Gutter cleaning**
▶ In the film 01:00

▶ Play · Video · 00:55

▶ Play · Video · 00:39

VERSATILITY

- Compatible with Osmosis (RO) water for streak-free glass cleaning and specialised nozzles for complex surfaces.
- The payload includes interchangeable nozzle holders (straight and tilting) to adapt to different architectural features.

03 **THE SYSTEM** — SPECIFICATIONS OF C10

Engineered for precision

The C10 isn't just a drone; it's a precision instrument. The drone is equipped with advanced avionics designed specifically for stability near structures.

▶ Play · 02:24

C10 Introduction
Film · 02:24

Automatic Radar-Controlled Distance System

Precision is key. The C10 features a front-mounted radar that measures the distance to the wall with an accuracy of 2–6 cm (≈ 0.8–2.4 in).

- **How it works:** The pilot sets a "Desired Distance" (e.g., 1.5 metres (≈ 4.9 ft)). The drone automatically maintains this position relative to the surface, ensuring even cleaning.
- **Emergency Push:** If the drone detects it is too close to the wall (e.g., due to a wind gust), the system automatically pushes the drone back to a safe distance (up to 2 metres (≈ 6.6 ft)) and switches to manual loiter mode for safety.

RTK Positioning for Centimetre Precision

For environments requiring maximum stability, the C10 supports Emlid RTK base stations and Network RTK (NTRIP). This allows the drone to use GNSS for altitude hold rather than barometers, preventing vertical drift in fluctuating pressure zones.

Optimised Washing System

- **Capacity:** The system is engineered to handle the weight of the water-filled hose up to a working height of 60 metres (≈ 196.9 ft).

Workflow: A smarter way to work

Professional efficiency in three steps.

1. Setup: The team positions the ground unit centrally. No heavy lifts, no scaffolding.

2. Launch: The pilot ascends to the target height while the helper manages the pressure unit.

3. Clean: The pilot engages the radar-based automatic distance control. The drone locks onto the façade, delivering a consistent, high-pressure wash while the operator monitors via HD FPV camera.

03.1 · DATASHEET

Specifications of C10

⤓ Datasheet PDF · 368 KB

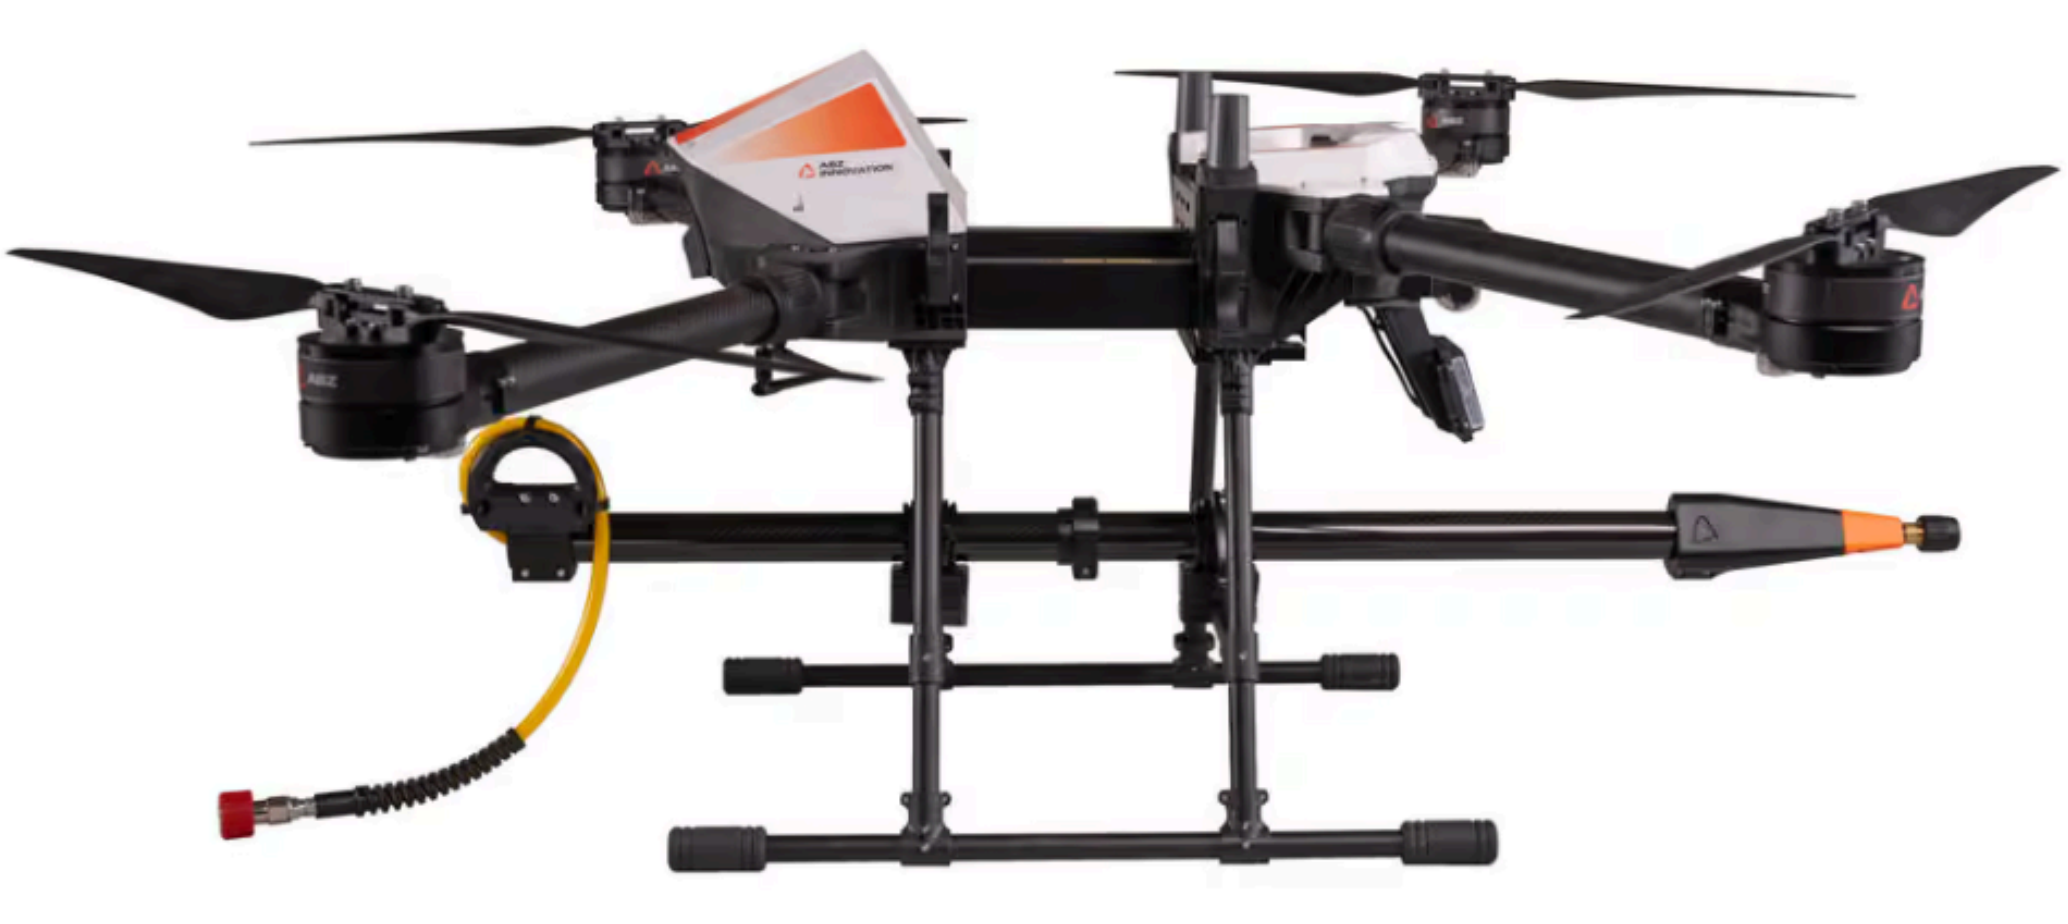

Maximum flight time	Max. tolerable wind speed	Effective signal range of RC	Battery charging time
18 min	10 m/s	~3.5 km	min. 11 minutes

03.1 General specifications · 03.2 Cleaning system · 03.3 High Pressure system (optional) · 03.4 Frequency bands · 03.5 Flight

03.1 General specifications
24 items

Payload	High-pressure cleaning system
Max. take-off weight	29 kg
Total weight (with battery)[*]	17.3 kg
Total weight (without battery)[*]	13 kg
Maximum characteristic dimension[**]	2290 mm
Dimensions (arms & propellers unfolded) with Spray lance (L x W x H)	2060 x 1600 x 600 mm
Dimensions (arms and propellers folded) with Spray lance (L x W x H)	1170 x 540 x 600 mm
Dimensions (arms and propellers folded) without Spray lance (L x W x H)	770 x 540 x 600 mm
Maximum flight time	18 min
GPS	GPS, GLONASS, Galileo, BeiDou
Hovering precision	±10 cm (RTK) ±1.5 m (without RTK)
Heading	Dual-RTK
Rotor dimensions	30 x 11
Battery type	Li-Po Smart
Battery capacity	16000 mAh
Battery voltage (nominal)	44.4V
Battery weight	4.2 kg
Battery charging time	min. 11 minutes
Battery charger channels	4 ports (2 balance)
Battery charger power	3000 W
Camera	Wide angle, vertically adjustable (0-180°)
Camera resolution	FHD
Effective signal range of RC	~3.5 km
Intrusion protection	Limited water and dust resistance

03.2 Cleaning system
6 items

Spray lance	Removable for transport
Spray lance extension range	± 180 mm
Spray nozzle	25°
Spray nozzle holder compatibility	M18 x 1.5
Nozzle holder	fix / tiltable
Hose length	optional 30 m / 60 m

03.3 High Pressure system (optional)
10 items

Cleaning system	Kärcher HD 7/17 M PLUS
Flow rate	11.6 l/min
Working pressure	170 / 17 bar/MPa
Max. pressure	255 / 25,5 bar/MPa
Water inlet	3/4"
Type	Electric
Supply voltage	3 Phase / 400 V / 50 Hz
Weight (with accessories)	32 kg
Weight incl. packaging	36 kg
Dimensions (L x W x H)	455 x 400 x 700 mm

03.4 Frequency bands
3 items

Radio Control and Telemetry	2.4GHz
WLAN	2.4GHz
LoRA	862–1020 MHz

03.5 Flight
5 items

Max. pitch angle	17°
Max. level speed	3 m/s
Max. flight altitude (AMSL)	4500 m
Max. flight altitude (AGL)	120 m
Max. tolerable wind speed	10 m/s

---

[*] The weight parameters vary by ±1kg according to the final product configuration

[**] Maximum distance between the tips of two opposite propellers

04 **FULL SERVICE SUPPORT** — THE BIONIC EYE LTD

01
Sales →

All prices are indicative, please ask for your custom tailored quote from our representative.

02
Operational Authorisation support →

03
Training →

04
Servicing →

05
Enhanced warranty option →

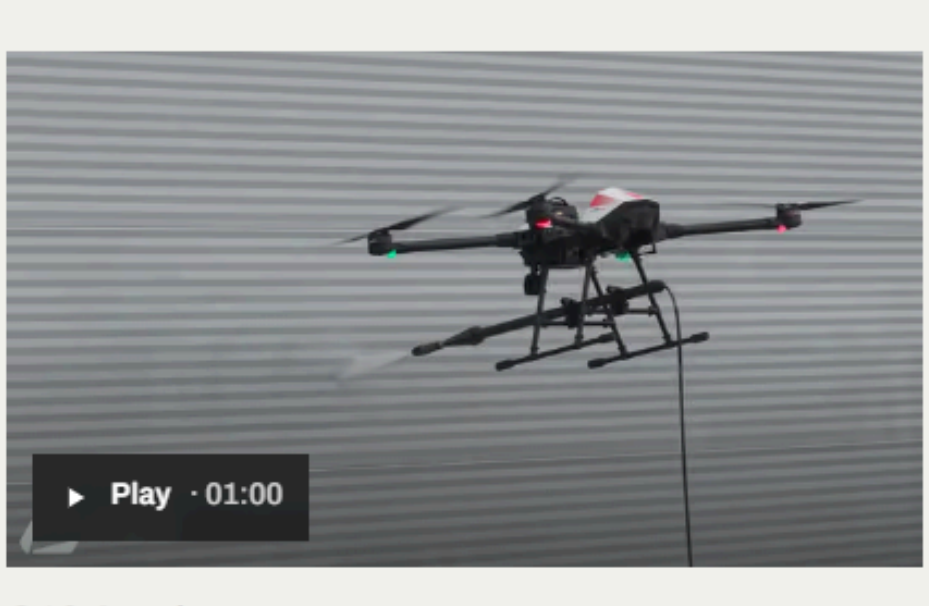

▶ Play · 01:00

C10 Academy
Excerpt · 01:00 of 05:04

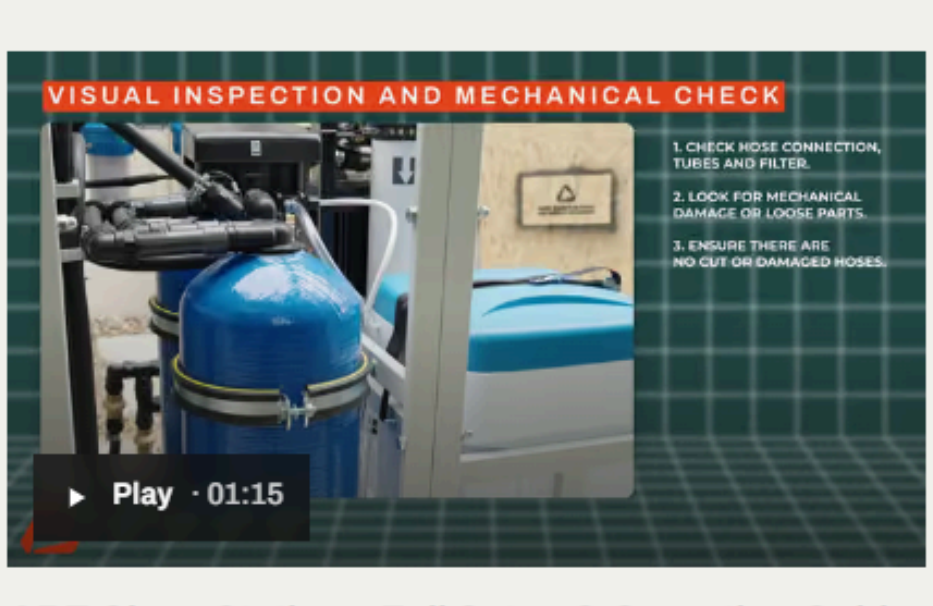

▶ Play · 01:15

ABZ Clean Station – Full Setup & Operation Guide
Excerpt · 01:15 of 05:49

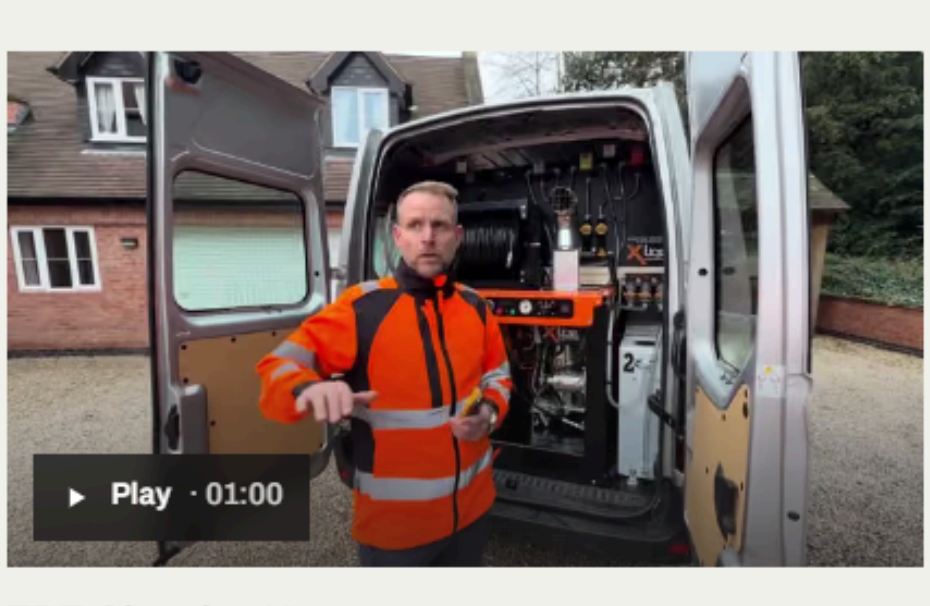

▶ Play · 01:00

TBE Cleaning Van
Excerpt · 01:00 of 10:57

05 **OPERATING LEGALLY**

REMOTE ID

Dronetag DRI module (EU/US compliant)

Source: ABZ Innovation C10 product catalogue, p. 9

04.02 Operational Authorisation support →

COPY PENDING

Approved regulatory wording to be supplied by The Bionic Eye before publication.

06 **ENQUIRY** — UK AND IRELAND DEALER FOR ABZ INNOVATION

Ready to rethink high-altitude cleaning?

CONTACT US

☎ +44 1753 655886
✉ info@thebioniceye.co.uk
shop.thebioniceye.co.uk

▶ Play · Excerpt · 00:24 of 02:14

Book a demonstration

PROPOSED FIELDS · PENDING APPROVAL

Name (required) ☐
Company ☐
Email (required) ☐
Phone ☐
Interested in: Book a demonstration ⌄
Message ☐

Book a demonstration →

Design preview: this form validates input but does not send or store any data. Privacy notice wording pending client approval.

THE BIONIC EYE
UNMANNED & UNMATCHED

The Bionic Eye Ltd
UK and Ireland dealer for ABZ Innovation

FIND MORE ABOUT US
+44 1753 655886
info@thebioniceye.co.uk
shop.thebioniceye.co.uk
Book a demonstration →

ASSET CLEANING
- 02 Applications
- 03 The system
- 04 Full service support
- 05 Operating legally
- 06 Enquiry

© The Bionic Eye Ltd

Design preview for contest review — not a live website.

↑ Back to top