



Payload Sled

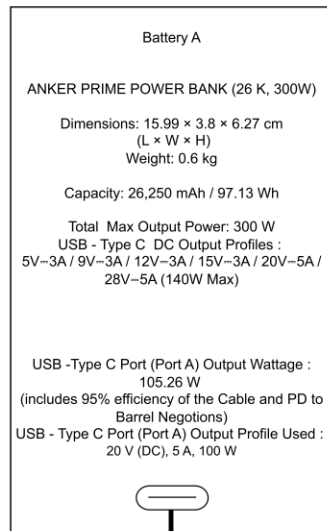


20 V (DC), 5 A, 100 W

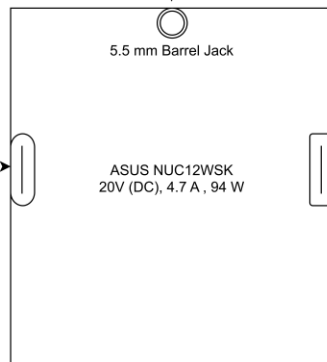


Intel Realsense D435 Camera 5
V (DC), 0.7 A, 3.5 W

Slamtec RPLIDAR
A2M12
5 V (DC), 0.5 A, 2.5 W

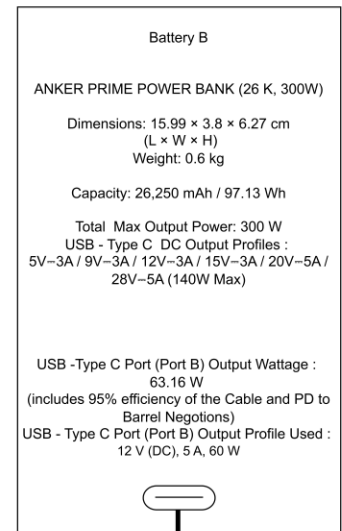

12 V (DC), 5 A, 60 W

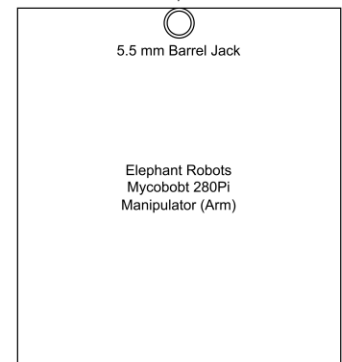

Elephant Robots
Mycobot280 Adaptive
Gripper

Legend

	Main High-Power Connection (primary power rail, no data)
	Secondary High-Power Connection (auxiliary power, no data)
	Low-Power Connection (data signal)
	Low-Power Connection with Control Signal (Gripper)
+ DC	+12 V nominal (9.0-12.6 V, up to 8 A)
- DC	0 V reference (system ground)
LED	Status indicator line (connector LED output)