Hisense HVAC

Hi-FLEXi

S Heat Recovery Series

Hi-FLEXi
S Heat Recovery Series

6-38 Ton 208/230/460V/575V

- Max Efficiency
  - Save energy
  - Save cost
- Max Flexibility
  - Design easily
  - Install easily
- Max Reliability
  - Back-up protection
  - Smart rotative operation

Intertek

AHRI CERTIFIED®

http://www.hisensecomfort.com
Hisense COMFORT - North America
americashvac@hisense.com
Hisense HVAC Americas
Hisense HVAC
Hisense HVAC

Hi-FLEXi S Heat Recovery Series

208/230V

Ton			6	8	10	12	14	16
Model			AVWT-72FFFH	AVWT-96FFFH	AVWT-120FFFH	AVWT-144FFFH	AVWT-168FFFH	AVWT-192FFFH
Power Supply			AC 3Φ 208/230V/60Hz					
Cooling	Capacity	kBtu/h	69.0	92.0	114.0	138.0	160.0	184.0
Heating	Capacity	kBtu/h	75.0	100.0	126.0	150.0	170.0	200.0
Air Flow Rate		CFM	6460	6460	7060	9430	9430	12360
Operation Range	Cooling	°F DB	14~126					
	Heating	°F WB	-13~62					

Ton			18	20	22	24	26	28
Model	Model		AVWT-216FFFH	AVWT-240FFFH	AVWT-264FFFH	AVWT-288FFFH	AVWT-312FFFH	AVWT-336FFFH
	Modules		AVWT-96FFFH AVWT-120FFFH	AVWT-120FFFH AVWT-120FFFH	AVWT-120FFFH AVWT-144FFFH	AVWT-144FFFH AVWT-144FFFH	AVWT-144FFFH AVWT-168FFFH	AVWT-168FFFH AVWT-168FFFH
Power Supply			AC 3Φ 208/230V/60Hz					
Cooling	Capacity	kBtu/h	206.0	228.0	252.0	275.5	298.0	320.0
Heating	Capacity	kBtu/h	226.0	252.0	276.0	300.5	320.0	340.0
Air Flow Rate		CFM	6460+7060	7060+7060	7060+9430	9430+9430	9430+9430	9430+9430
Operation Range	Cooling	°F DB	14~126					
	Heating	°F WB	-13~62					

Ton			30	32	34	36	38
Model	Model		AVWT-360FFFH	AVWT-384FFFH	AVWT-408FFFH	AVWT-432FFFH	AVWT-456FFFH
	Modules		AVWT-168FFFH AVWT-192FFFH	AVWT-192FFFH AVWT-192FFFH	AVWT-120FFFH AVWT-144FFFH AVWT-144FFFH	AVWT-144FFFH AVWT-144FFFH AVWT-144FFFH	AVWT-144FFFH AVWT-144FFFH AVWT-168FFFH
Power Supply			AC 3Φ 208/230V/60Hz				
Cooling	Capacity	kBtu/h	344.0	368.0	389.5	413.5	435.5
Heating	Capacity	kBtu/h	370.0	400.0	426.0	450.5	470.0
Air Flow Rate		CFM	9430+12360	12360+12360	7060+9430+9430	9430+9430+9430	9430+9430+9430
Operation Range	Cooling	°F DB	14~126				
	Heating	°F WB	-13~62				

460V

Ton			6	8	10	12	14	16
Model			AVWT-72FHFSHA	AVWT-96FHFSHA	AVWT-120FHFSHA	AVWT-144FHFSHA	AVWT-168FHFSHA	AVWT-192FHFSHA
Power Supply			AC 3Φ 460V/60Hz					
Cooling	Capacity	kBtu/h	69.0	92.0	114.0	138.0	160.0	184.0
Heating	Capacity	kBtu/h	75.0	100.0	126.0	150.0	170.0	200.0
Air Flow Rate		CFM	6460	6460	7060	9430	9430	12360
Operation Range	Cooling	°F DB	14~126					
	Heating	°F WB	-13~62					

Ton			18	20	22	24	26	28
Model	Model		AVWT-216FHFSHA	AVWT-240FHFSHA	AVWT-264FHFSHA	AVWT-288FHFSHA	AVWT-312FHFSHA	AVWT-336FHFSHA
	Modules		AVWT-96FHFSHA AVWT-120FHFSHA	AVWT-120FHFSHA AVWT-120FHFSHA	AVWT-120FHFSHA AVWT-144FHFSHA	AVWT-144FHFSHA AVWT-144FHFSHA	AVWT-144FHFSHA AVWT-168FHFSHA	AVWT-168FHFSHA AVWT-168FHFSHA
Power Supply			AC 3Φ 460V/60Hz					
Cooling	Capacity	kBtu/h	206.0	228.0	252.0	276.0	298.0	320.0
Heating	Capacity	kBtu/h	226.0	252.0	276.0	300.5	320.0	340.0
Air Flow Rate		CFM	6460+7060	7060+7060	7060+9430	9430+9430	9430+9430	9430+9430
Operation Range	Cooling	°F DB	14~126					
	Heating	°F WB	-13~62					

Ton			30	32	34	36	38
Model	Model		AVWT-360FHFSHA	AVWT-384FHFSHA	AVWT-408FHFSHA	AVWT-432FHFSHA	AVWT-456FHFSHA
	Modules		AVWT-168FHFSHA AVWT-192FHFSHA	AVWT-192FHFSHA AVWT-192FHFSHA	AVWT-120FHFSHA AVWT-144FHFSHA AVWT-144FHFSHA	AVWT-144FHFSHA AVWT-144FHFSHA AVWT-144FHFSHA	AVWT-144FHFSHA AVWT-144FHFSHA AVWT-168FHFSHA
Power Supply			AC 3Φ 460V/60Hz				
Cooling	Capacity	kBtu/h	344.0	368.0	390.0	414.0	436.0
Heating	Capacity	kBtu/h	370.0	400.0	426.0	450.5	470.0
Air Flow Rate		CFM	9430+12360	12360+12360	7060+9430+9430	9430+9430+9430	9430+9430+9430
Operation Range	Cooling	°F DB	14~126				
	Heating	°F WB	-13~62				

575V

Ton			6	8	10	12	14	16
Model			AVWT-72FLFSH	AVWT-96FLFSH	AVWT-120FLFSH	AVWT-144FLFSH	AVWT-168FLFSH	AVWT-192FLFSH
Power Supply			AC 3Φ 575V/60Hz					
Cooling	Capacity	kBtu/h	69.0	92.0	114.0	138.0	160.0	184.0
Heating	Capacity	kBtu/h	75.0	100.0	126.0	150.0	170.0	200.0
Air Flow Rate		CFM	6460	6460	7060	9430	9430	12360
Operation Range	Cooling	°F DB	14~126					
	Heating	°F WB	-13~62					

Ton			18	20	22	24	26	28
Model	Model		AVWT-216FLFSH	AVWT-240FLFSH	AVWT-264FLFSH	AVWT-288FLFSH	AVWT-312FLFSH	AVWT-336FLFSH
	Modules		AVWT-96FLFSH AVWT-120FLFSH	AVWT-120FLFSH AVWT-120FLFSH	AVWT-120FLFSH AVWT-144FLFSH	AVWT-144FLFSH AVWT-144FLFSH	AVWT-144FLFSH AVWT-168FLFSH	AVWT-168FLFSH AVWT-168FLFSH
Power Supply			AC 3Φ 575V/60Hz					
Cooling	Capacity	kBtu/h	206.0	228.0	252.0	275.5	298.0	320.0
Heating	Capacity	kBtu/h	226.0	252.0	276.0	300.0	320.0	340.0
Air Flow Rate		CFM	6460+7060	7060+7060	7060+9430	9430+9430	9430+9430	9430+9430
Operation Range	Cooling	°F DB	14~126					
	Heating	°F WB	-13~62					

Ton			30	32	34	36	38
Model	Model		AVWT-360FLFSH	AVWT-384FLFSH	AVWT-408FLFSH	AVWT-432FLFSH	AVWT-456FLFSH
	Modules		AVWT-168FLFSH AVWT-192FLFSH	AVWT-192FLFSH AVWT-192FLFSH	AVWT-120FLFSH AVWT-144FLFSH AVWT-144FLFSH	AVWT-144FLFSH AVWT-144FLFSH AVWT-144FLFSH	AVWT-144FLFSH AVWT-144FLFSH AVWT-168FLFSH
Power Supply			AC 3Φ 575V/60Hz				
Cooling	Capacity	kBtu/h	344.0	368.0	388.0	414.0	436.0
Heating	Capacity	kBtu/h	370.0	400.0	426.0	450.5	470.0
Air Flow Rate		CFM	9430+12360	12360+12360	7060+9430+9430	9430+9430+9430	9430+9430+9430
Operation Range	Cooling	°F DB	14~126				
	Heating	°F WB	-13~62				

Double back-up protection

Hisense VRF has standard double back-up systems to keep you comfortable indoors despite the failure of any individual compressor or unit of the same modular combination. The remaining units will step up their operating performance to ensure continuous comfort.

Note: If you have any questions, please contact our engineers.

Smart rotative operation

Operation duties are smartly balanced in higher capacity modular combinations to prevent the overwork of individual unit and extend the overall operating life of the system.

360° fitted refrigerant cooling technology

With the 360° refrigerant cooling technology, Hi-FLEXi S Series will remove heat from the main PCB, the inverter module and the outdoor unit's electrical box stably and efficiently. New integral heat sink can help to improve the electrical reliability of the unit when it is running under high ambient temperature. This ensures the stability and safety of the outdoor unit and also prevents poor heat dissipation caused by intermittent operation or the sudden stop of the fan.

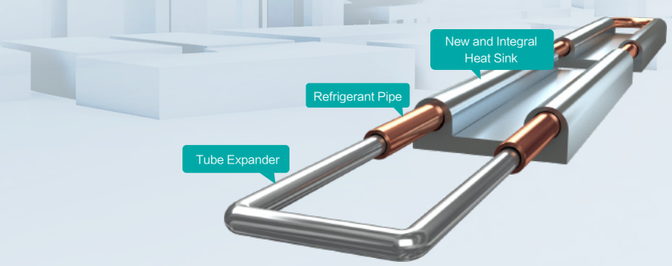

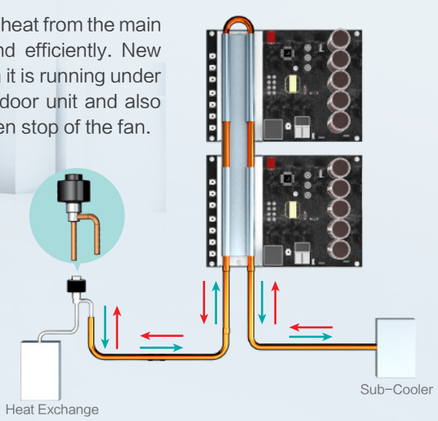

Extra long pipe design

With extra long piping, the height difference between the indoor unit and outdoor unit is up to 295ft.(90m)* , allowing flexible installation options.

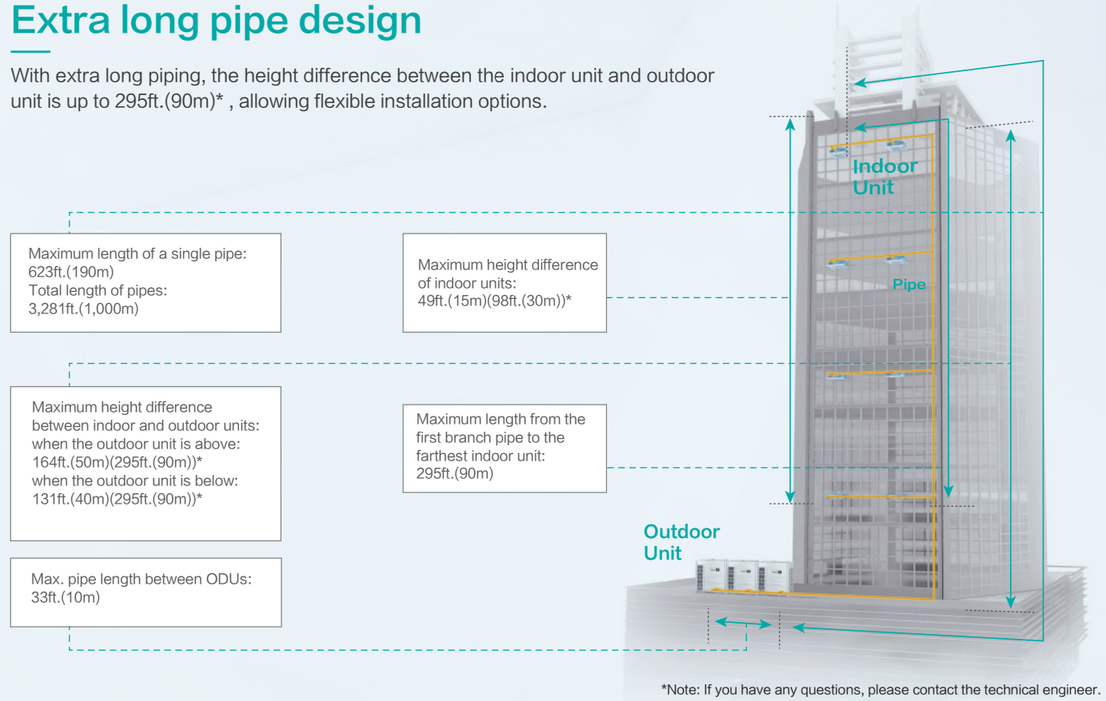

*Note: If you have any questions, please contact the technical engineer.
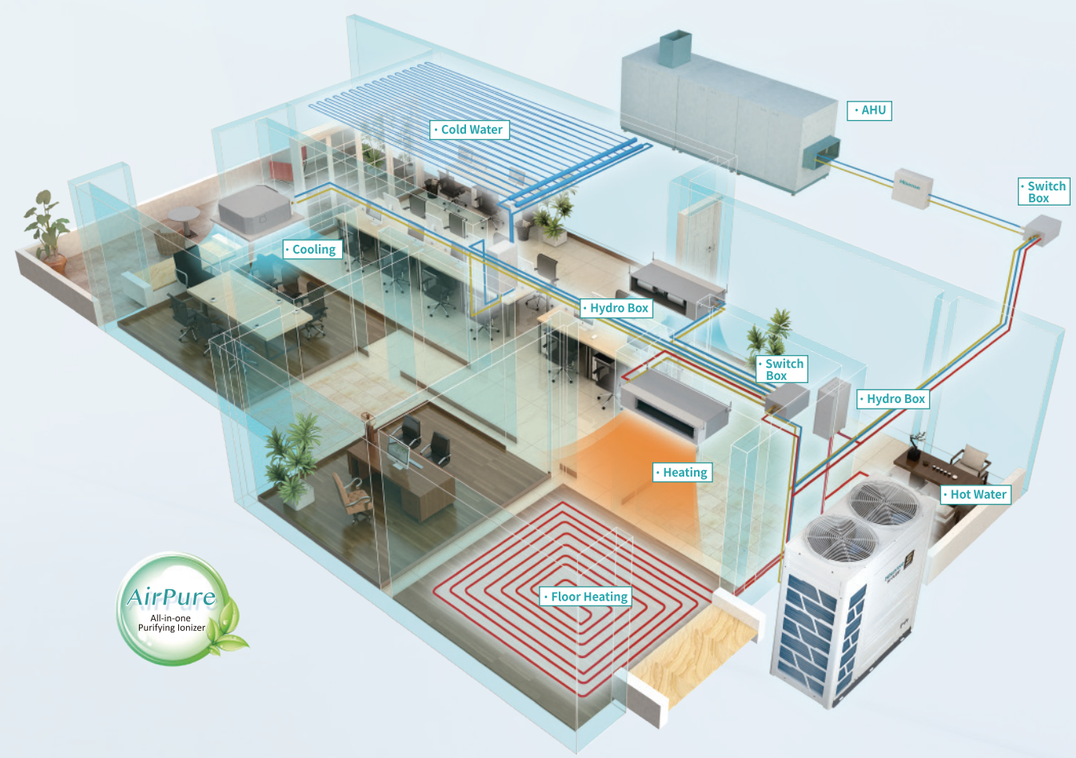
Comprehensive Solutions