PPDU: physical layer (PHY) protocol data unit (PPDU)
Data filed is PSDU(S)



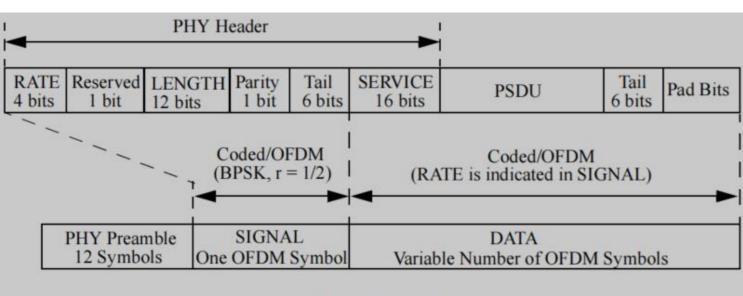


Figure 17-1—PPDU format



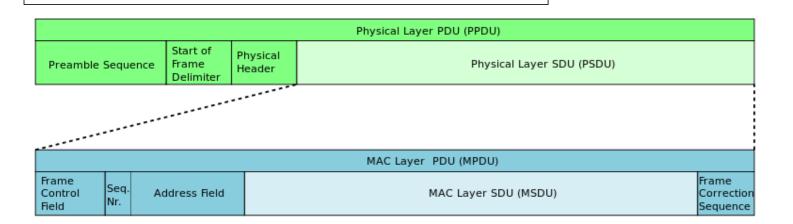


Mac protocol data unit (MPDU) Body 就是 MSDU

Octets: 2	2	6	0 or 6	0 or 6	0 or 2	0 or 6	0 or 2	0 or 4	variable	4
Frame Control	Duration /ID	Address 1	Address 2	Address 3	Sequence Control	Address 4	QoS Control	HT Control	Frame Body	FCS
MAC header Figure 9.1—MAC frame format										

Figure 9-1—MAC frame format

Mac Service data unit (MSDU) Body 就是 MSDU, LLC的格式有两种 802.3

There are two LLC sublayer protocols used (see IEEE Std 802-2014); LLC Protocol Discrimination (LPD) (see ISO/IEC 8802-2:1998) and EtherType Protocol Discrimination (EPD) (see IEEE Std 802.3-2012). LPD is used for transmission of all IEEE 802.11 MSDUs with the exception of the 5.9 GHz bands where EPD is used (see E.2.3 and E.2.4).

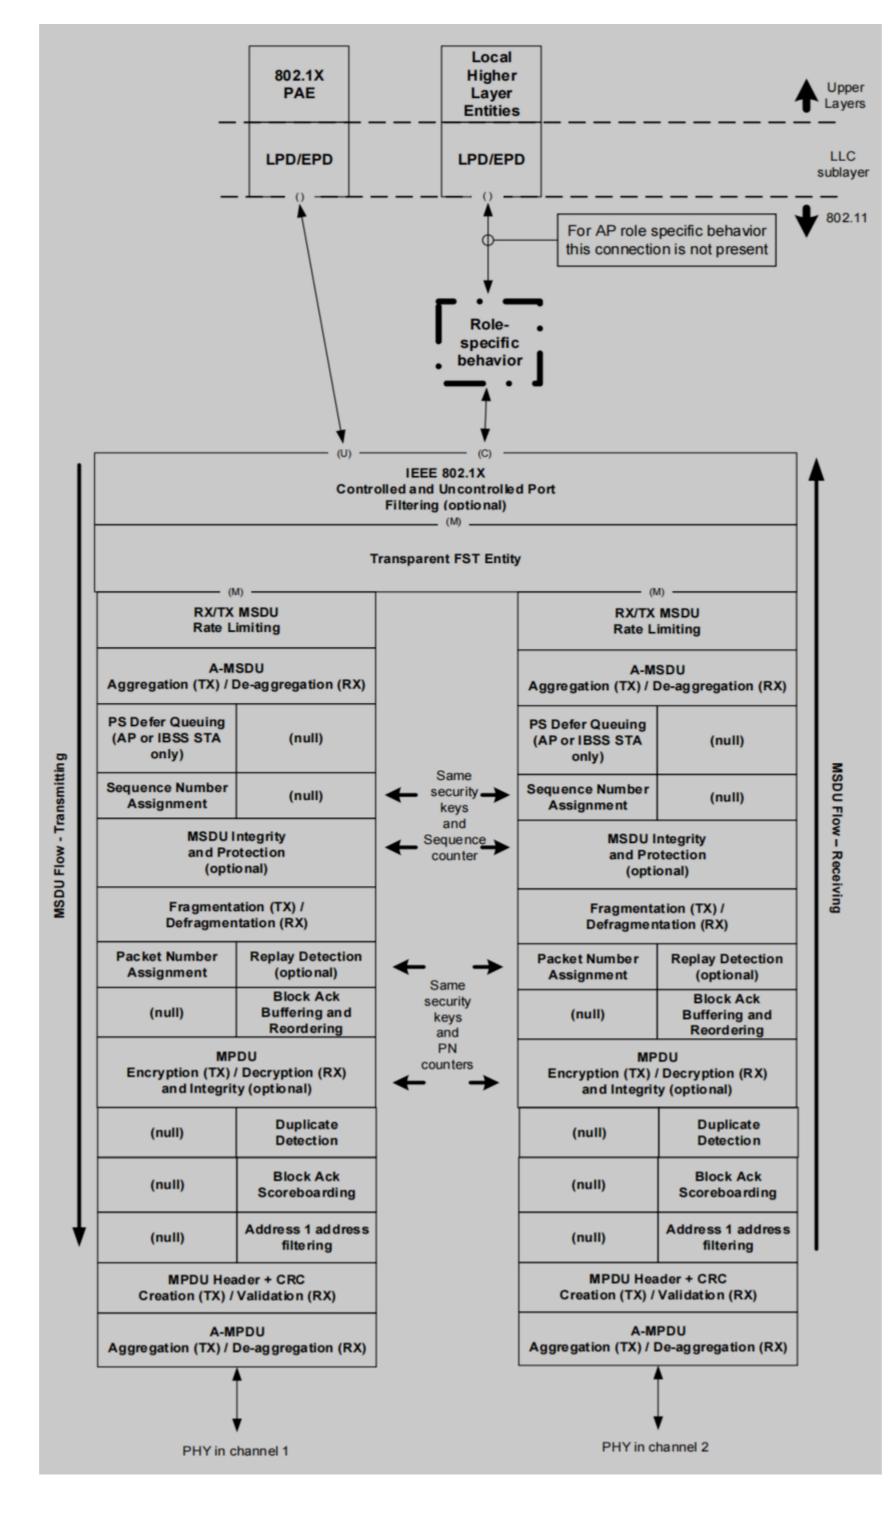

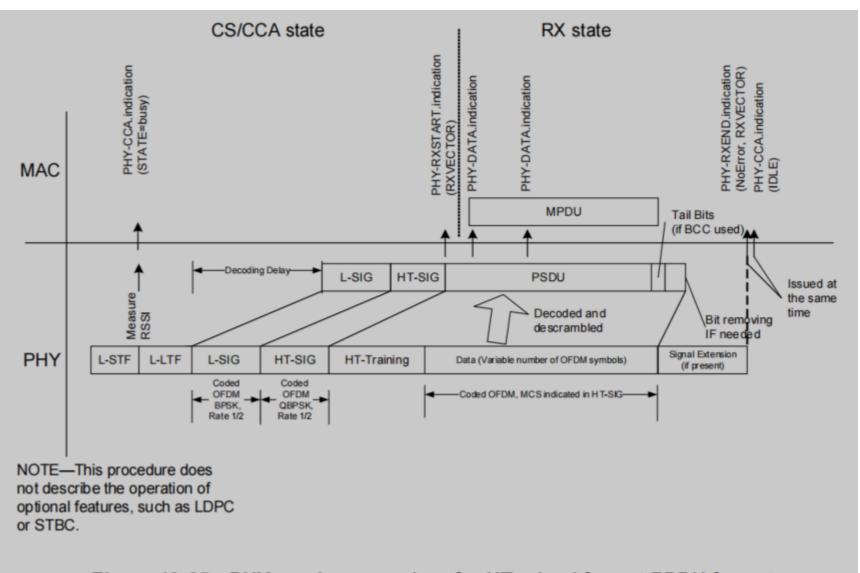


Figure 19-25—PHY receive procedure for HT-mixed format PPDU format

