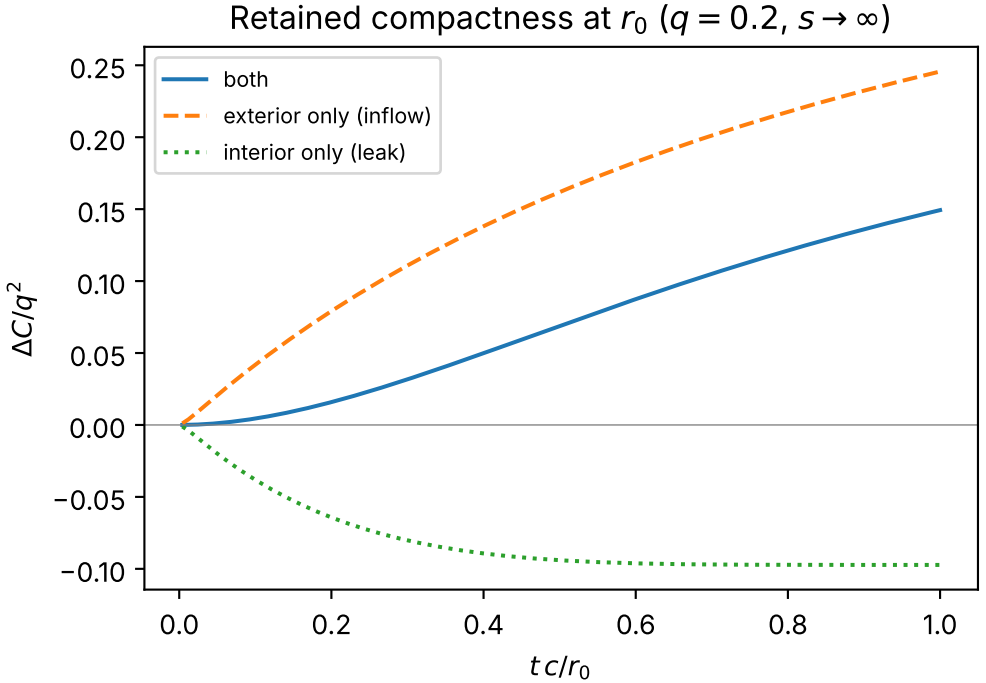
Retained compactness at r_0 ($q = 0.2$, $s \to \infty$)
both
exterior only (inflow)
interior only (leak)
$\Delta C/q^2$
$t\,c/r_0$

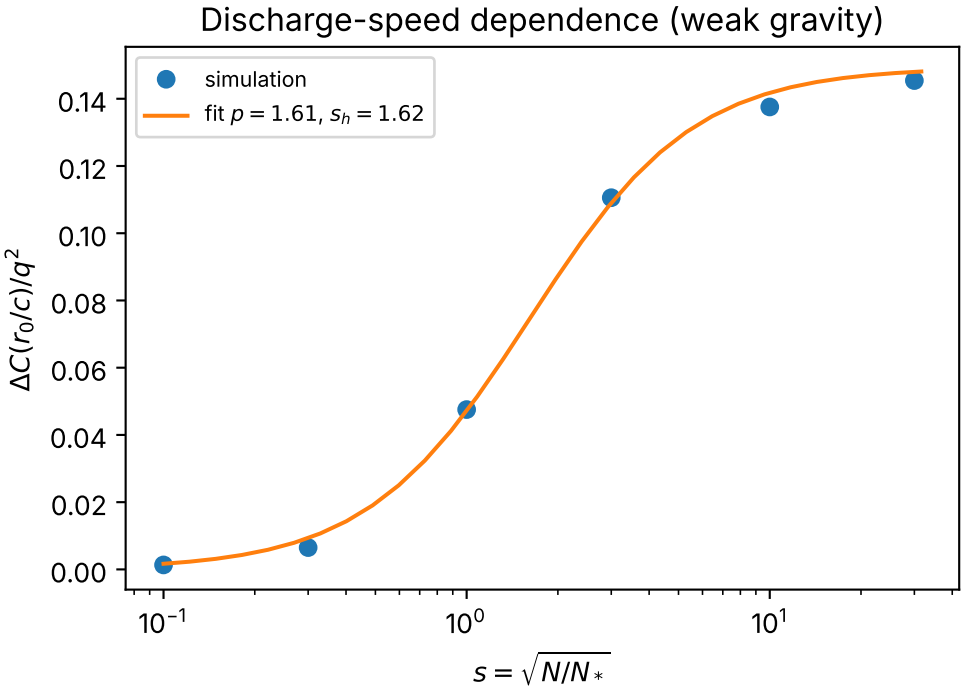
Discharge-speed dependence (weak gravity)
simulation
fit $p = 1.61$, $s_h = 1.62$
$\Delta C(r_0/c)/q^2$
$s = \sqrt{N/N_*}$

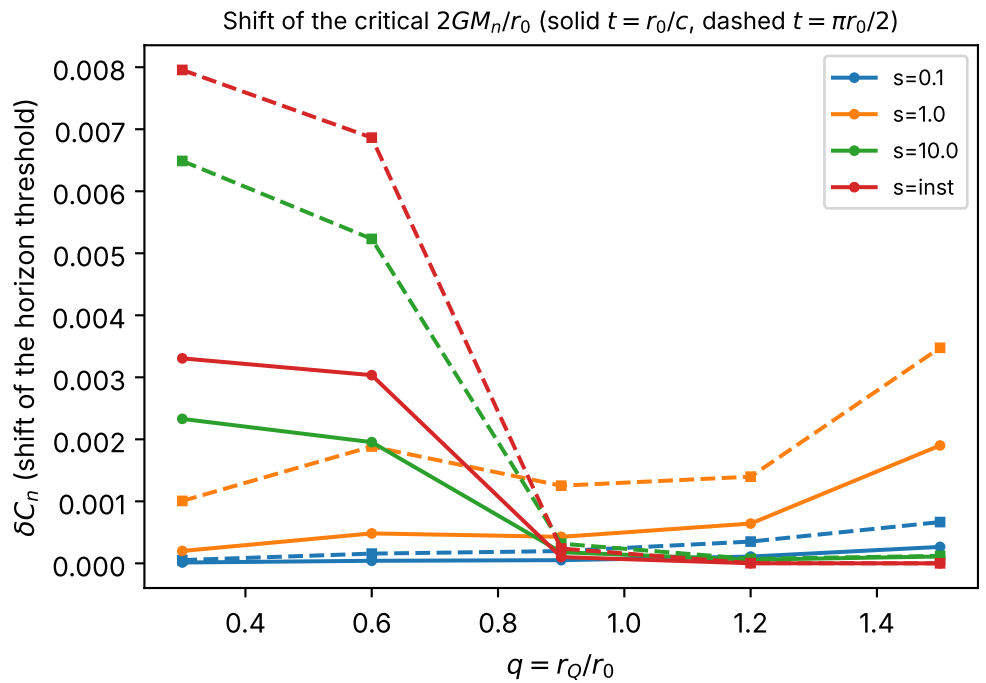
Shift of the critical $2GM_n/r_0$ (solid $t = r_0/c$, dashed $t = \pi r_0/2$)
s=0.1
s=1.0
s=10.0
s=inst
δC_n (shift of the horizon threshold)
$q = r_Q/r_0$

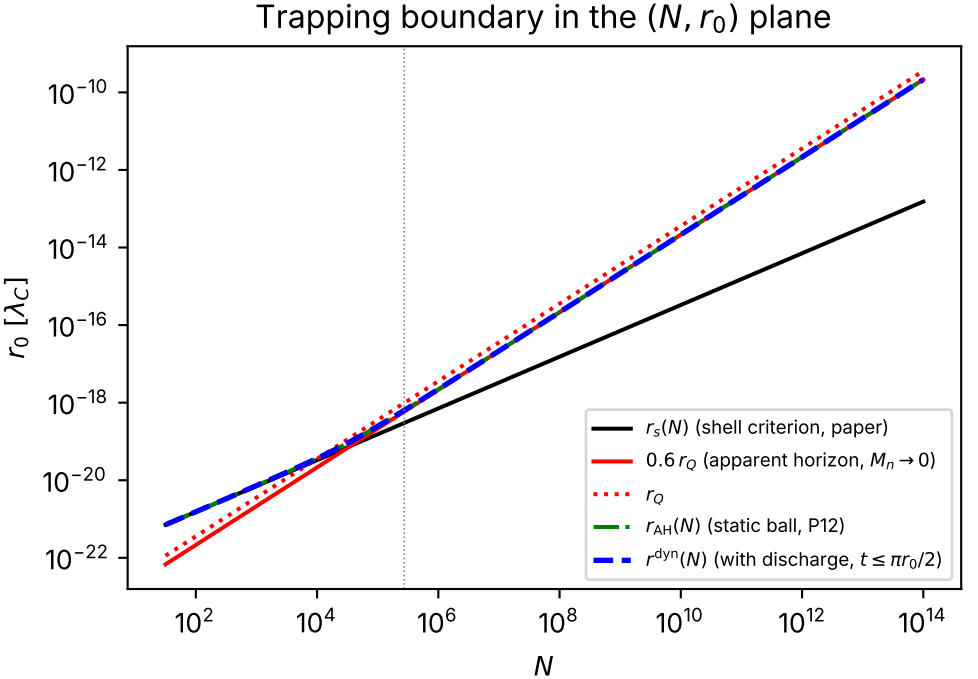
Trapping boundary in the (N, r_0) plane
$r_s(N)$ (shell criterion, paper)
$0.6\,r_Q$ (apparent horizon, $M_n \to 0$)
r_Q
$r_{AH}(N)$ (static ball, P12)
$r^{dyn}(N)$ (with discharge, $t \le \pi r_0/2$)
r_0 [λ_C]
N