Ascii1000D Test

999-999999-999

Table of Contents

List of Figures

List of Tables

0.0.1

TELEDYNE FLIR LLC 27700 SW Parkway Avenue Wilsonville, OR 97070 USA Phone: 800.868.0639

WARNING - This document contains technical data subject to the International Traffic in Arms Regulations (ITAR) (22 C.F.R. Sections 120-130). Export or diversion contrary to law is prohibited.

PROPRIETARY - This document contains proprietary information to Teledyne FLIR LLC. This information must be maintained in confidence and used only in a manner consistent with the documentation and any executed Non Disclosure Agreement, and may not be disclosed to any third parties without Teledyne FLIR's written consent.

U.S. PATENTS - The Star SAFIRE© 380-HD Series Systems are protected by the following patents: U.S. Patent No. 7,264,220; U.S. Patent No. 7,471,451; U.S. Patent No. 7,561,784; and U.S. Patent No. 7,671,311. Other U.S. and International Patents Pending.

© PROPRIETARY by Teledyne FLIR LLC

WARNING - ITAR Controlled Technical Data

<style> ol { list-style-type: none; counter-reset: item; margin: 0; padding: 0; } ol > li { display: table; counter-increment: item; margin-bottom: 0.6em; } ol > li:before { content: counters(item, ".") ". "; display: table-cell; padding-right: 1.5em; } li ol > li { margin: 0; } li ol > li:before { content: counters(item, ".") " "; } </style>

Ascii1000D - Description

1.1. Description

1.1.1. System definitions

Bold, *underline*, <mark>highlight</mark>, subscript, superscript, other text styles available.

Special characters invoked by character substitution such as ©, ®, →, and more.

Keyboard sequences are supported by the `kbd` macro, for example **CTRL**+**ALT**+**DEL**.

The footnote macro produces notes in the bottom of the page[1]

Note

The KBD macro is only active when the EXPERIMENTAL document attribute is declared. Otherwise, it appears as monospaced verbatim text.

1.1.2. Index test

The Lady of the Lake, her arm clad in the purest shimmering samite, held aloft Excalibur from the bosom of the water, signifying by divine providence that I, Arthur, was to carry Excalibur . That is why I am your king. Shut up! Will you shut up?! Burn her anyway! I'm not a witch. Look, my liege! We found them.

Unordered List

- Item
- Item
- Item

Ordered list

1. Item

---

[1] Text of the footnote

2.   Item

   2.1.   Item

   2.2.   Item

        2.2.1. Item

3.   Item

1.1.3. System 2 Definitions

Demo for change process

1.2. Description part two

Descriptive data modules are relatively unconstrained.

This content is specific to CONFIG1.

2
Ascii1000D - Inspect

2.1. Prerequisites

2.1.1. Support equipment

NA

2.1.2. Supplies

NA

2.1.3. Spares

NA

2.2. Procedure

Warning

Material may cause burning to death

1.
Warning

High voltage kills! ZAP

Turn on the system if the temperature is under 80°

2. Use the `source` switch to ensure that the electrical system is not AC (Alternating Current) during maintenance.

3. Ensure electrical safety procedures are followed.

4. If the system is CONFIG1, check yellow warning light

5. Confirm green light

6. Reserve spare units in accordance with OEM (Original Equipment Manufacturer) published storage procedures.

2.3. Closing Requirements

NA

Ascii1000D - Remove

3.1. Prerequisites

3.1.1. Support equipment

NA

3.1.2. Supplies

NA

3.1.3. Spares

NA

3.2. Procedure

1.

Warning

Do not remove the wrong part

Remove the part.

   1.1.

Caution

Skydrol is a surface irritant and inhalation hazard

Drain fluids from part.

   1.2.   Perform other cleaning operations.

2.   Reserve the removed part for bench testing according to OEM (Original Equipment Manufacturer) storage procedures.

3.3. Closing Requirements

NA

Ascii1000D - Install:DMC

4.1. Prerequisites

4.1.1. Support equipment

NA

4.1.2. Supplies

NA

4.1.3. Spares

PNR	NOMEN	QTY
999-999999-99	SparePart	1
999-888888-991	SpareConfig1	1

4.2. Procedure

1.   Install the part

2.   For CONFIG1, perform the following steps

    2.1.   Remove the yellow light]

4.3. Closing Requirements

Perform inspection	Chapter 2, *Ascii1000D - Inspect*

5.1. Preliminary requirements

Table 5.1. Required conditions

Action/Condition	Data module/Technical publication
The bicycle is safely held on a work stand	

Support equipment

Table 5.2. Support equipment

Name/Alternate name	Part number	MFC	Quantity	Remark
Work stand	Stand-001	Stand	1	

Spares

Table 5.3. Spares

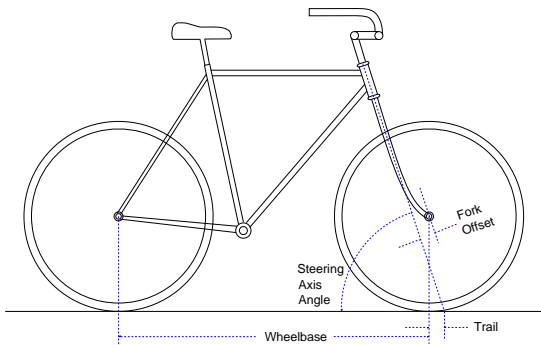| Name/Alternate name	Part number	MFC	Quantity	Remark
Frame fork	St-001-02	KZ555	1	
Upper bearing cup	St-001-03	KZ555	1	
Brake cable hangar	BR-LVRS-002	KT444	1	
Dust seal	St-001-04	KZ555	1	
Conical expansion washer	St-001-05	KZ555	1	

5.2. Procedure

Figure 5.1. Test SVG image

1. Install the Frame Fork on the frame.

2. Install the Upper bearing cup.

3. Install the components that follow on the steering tube:

    - Brake cable hangar

    - Dust seal

    - Conical expansion washer

4. Install the stem

5.3. Requirements after job completion

NA

Index

A

Arthur, 1

S

Sword
  Broadsword
    Excalibur, 1

Terminology

mud   wet, cold dirt

rain   water falling from the sky