



APPENDIX A

Collected Traffic Counts

Vehicle Volume Report - Hourly

Site Description: Highway 66 E.O. Cemex Driveway
 Site Number: 5
 Start Date: 6/13/2023
 End Date: 6/13/2023

Time	Monday			Tuesday			Wednesday			Thursday			Friday			Saturday			Sunday			3 Day Avg		5 Day Avg		7 Day Avg	
	6/12/23			6/13/23			6/14/23			6/15/23			6/16/23			6/17/23			6/18/23			Tue-Thu		Mon-Fri		Mon-Sun	
	EB	WB	Total	EB	WB	Total	EB	WB	Total	EB	WB	Total	EB	WB	Total	EB	WB	Total	EB	WB	Total	EB	WB	EB	WB	EB	WB
12:00 AM	-	-	-	12	20	32	8	15	23	10	13	23	-	-	-	-	-	-	-	-	-	10	16	-	-	-	-
1:00 AM	-	-	-	7	7	14	4	5	9	4	9	13	-	-	-	-	-	-	-	-	-	5	7	-	-	-	-
2:00 AM	-	-	-	10	10	20	6	6	12	9	7	16	-	-	-	-	-	-	-	-	-	8	8	-	-	-	-
3:00 AM	-	-	-	6	7	13	8	7	15	2	14	16	-	-	-	-	-	-	-	-	-	5	9	-	-	-	-
4:00 AM	-	-	-	23	29	52	21	23	44	20	21	41	-	-	-	-	-	-	-	-	-	21	24	-	-	-	-
5:00 AM	-	-	-	74	74	148	70	89	159	57	87	144	-	-	-	-	-	-	-	-	-	67	83	-	-	-	-
6:00 AM	-	-	-	151	272	423	155	301	456	182	288	470	-	-	-	-	-	-	-	-	-	163	287	-	-	-	-
7:00 AM	-	-	-	274	415	689	272	542	814	258	466	724	-	-	-	-	-	-	-	-	-	268	474	-	-	-	-
8:00 AM	-	-	-	341	485	826	323	540	863	334	475	809	-	-	-	-	-	-	-	-	-	333	500	-	-	-	-
9:00 AM	-	-	-	340	393	733	339	521	860	334	445	779	-	-	-	-	-	-	-	-	-	338	453	-	-	-	-
10:00 AM	-	-	-	408	374	782	326	461	787	377	435	812	-	-	-	-	-	-	-	-	-	370	423	-	-	-	-
11:00 AM	-	-	-	405	404	809	398	515	913	431	448	879	-	-	-	-	-	-	-	-	-	411	456	-	-	-	-
12:00 PM	-	-	-	388	407	795	407	491	898	423	461	884	-	-	-	-	-	-	-	-	-	406	453	-	-	-	-
1:00 PM	-	-	-	417	384	801	431	461	892	427	475	902	-	-	-	-	-	-	-	-	-	425	440	-	-	-	-
2:00 PM	-	-	-	514	349	863	465	462	927	509	453	962	-	-	-	-	-	-	-	-	-	496	421	-	-	-	-
3:00 PM	-	-	-	560	428	988	584	450	1034	556	432	988	-	-	-	-	-	-	-	-	-	567	437	-	-	-	-
4:00 PM	-	-	-	606	411	1017	774	439	1213	673	426	1099	-	-	-	-	-	-	-	-	-	684	425	-	-	-	-
5:00 PM	-	-	-	623	391	1014	664	410	1074	642	409	1051	-	-	-	-	-	-	-	-	-	643	403	-	-	-	-
6:00 PM	-	-	-	369	379	748	389	324	713	328	373	701	-	-	-	-	-	-	-	-	-	362	359	-	-	-	-
7:00 PM	-	-	-	260	226	486	250	252	502	292	278	570	-	-	-	-	-	-	-	-	-	267	252	-	-	-	-
8:00 PM	-	-	-	158	215	373	228	174	402	208	184	392	-	-	-	-	-	-	-	-	-	198	191	-	-	-	-
9:00 PM	-	-	-	99	124	223	136	108	244	135	144	279	-	-	-	-	-	-	-	-	-	123	125	-	-	-	-
10:00 PM	-	-	-	55	71	126	44	45	89	92	67	159	-	-	-	-	-	-	-	-	-	64	61	-	-	-	-
11:00 PM	-	-	-	21	33	54	26	29	55	50	31	81	-	-	-	-	-	-	-	-	-	32	31	-	-	-	-
6:00 AM - 9:00 AM	-	-	-	766	1172	1938	750	1383	2133	774	1229	2003	-	-	-	-	-	-	-	-	-	763	1261	-	-	-	-
3:00 PM - 6:00 PM	-	-	-	1789	1230	3019	2022	1299	3321	1871	1267	3138	-	-	-	-	-	-	-	-	-	1894	1265	-	-	-	-
6:00 AM - 7:00 PM	-	-	-	5396	5092	10488	5527	5917	11444	5474	5586	11060	-	-	-	-	-	-	-	-	-	5466	5532	-	-	-	-
12:00 AM - 12:00 AM	-	-	-	6121	5908	12029	6328	6670	12998	6353	6441	12794	-	-	-	-	-	-	-	-	-	6267	6340	-	-	-	-
Percent	-	-	-	50.9%	49.1%	100.0%	48.7%	51.3%	100.0%	49.7%	50.3%	100.0%	-	-	-	-	-	-	-	-	-	49.7%	50.3%	-	-	-	-
AM Peak	-	-	-	8:00 AM	9:00 AM		11:00 AM	12:00 PM		11:00 AM	12:00 PM		-	-	-	-	-	-	-	-	-						
PM Peak	-	-	-	4:00 PM	5:00 PM		4:00 PM	5:00 PM		4:00 PM	5:00 PM		-	-	-	-	-	-	-	-	-						

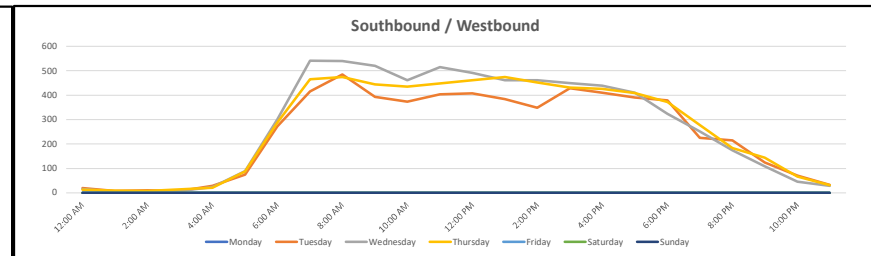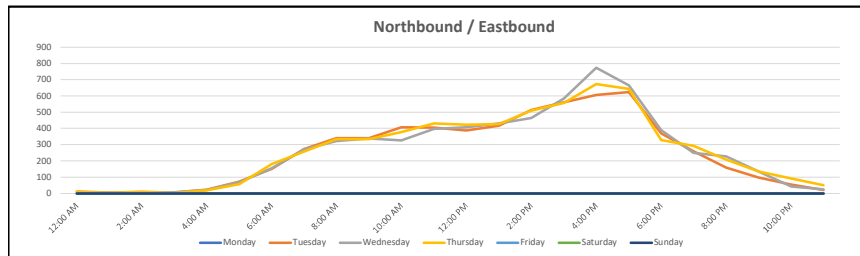



ALL TRAFFIC DATA SERVICES

(303) 216-2439

www.alltrafficdata.net


Location: 1 US 36 & SH 66 AM

Date: Thursday, June 15, 2023


Peak Hour: 04:00 PM - 05:00 PM

Peak 15-Minutes: 04:45 PM - 05:00 PM


Peak Hour - Motorized Vehicles

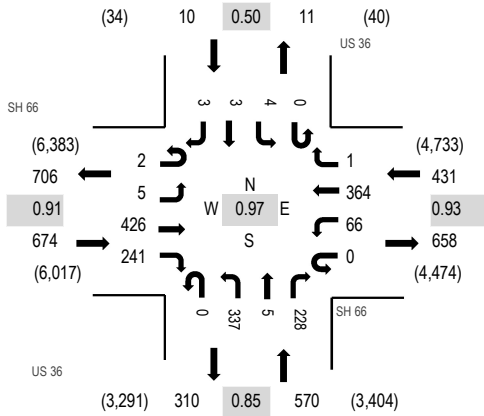

Peak Hour - Bicycles

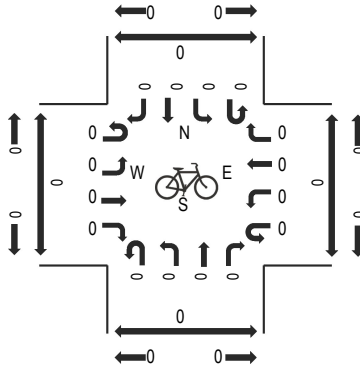

Peak Hour - Pedestrians



Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

Interval Start Time	SH 66 Eastbound				SH 66 Westbound				US 36 Northbound				US 36 Southbound				Total	Rolling Hour	Pedestrian Crossings			
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right			West	East	South	North
5:00 AM	0	0	8	7	0	1	7	0	0	8	0	1	0	0	0	0	32	204	0	0	0	0
5:15 AM	0	0	13	11	0	6	8	0	0	5	0	2	0	0	0	0	45	268	0	0	0	0
5:30 AM	0	0	13	17	0	8	15	0	0	6	0	0	0	0	0	0	59	360	0	0	0	0
5:45 AM	0	0	18	19	0	6	11	0	0	14	0	0	0	0	0	0	68	471	0	0	0	0
6:00 AM	0	0	23	13	0	16	23	0	0	11	0	10	0	0	0	0	96	592	0	0	0	0
6:15 AM	0	0	32	26	0	11	39	0	0	27	0	2	0	0	0	0	137	727	0	0	0	0
6:30 AM	0	0	49	21	0	35	39	0	0	18	0	8	0	0	0	0	170	799	0	0	0	0
6:45 AM	0	0	33	30	0	25	56	0	0	29	0	16	0	0	0	0	189	936	0	0	0	0
7:00 AM	1	1	48	37	0	45	51	0	0	37	0	11	0	0	0	0	231	1,047	0	0	0	0
7:15 AM	0	0	48	42	0	45	41	0	0	29	0	4	0	0	0	0	209	1,122	0	0	0	0
7:30 AM	0	0	61	70	0	65	64	0	0	32	0	15	0	0	0	0	307	1,214	0	0	0	0
7:45 AM	0	1	63	50	0	42	81	1	0	47	0	14	0	0	1	0	300	1,241	0	0	0	0
8:00 AM	0	0	72	70	0	53	61	0	0	37	0	13	0	0	0	0	306	1,215	0	0	0	0
8:15 AM	0	1	63	68	0	31	83	0	0	41	0	12	0	0	0	2	301	1,230	0	0	0	0
8:30 AM	0	0	72	84	0	49	70	0	0	41	1	17	0	0	0	0	334	1,235	0	0	0	0
8:45 AM	1	0	61	63	0	34	80	0	0	16	0	17	0	1	0	1	274	1,199	0	0	0	0
9:00 AM	1	0	84	53	0	17	93	0	0	66	0	7	0	0	0	0	321	1,231	0	0	0	0
9:15 AM	1	0	75	61	0	18	90	0	0	48	0	12	0	0	0	1	306	1,233	0	0	0	0
9:30 AM	0	2	67	60	0	18	95	0	0	48	0	7	0	1	0	0	298	1,222	0	0	0	0
9:45 AM	0	0	76	53	0	18	98	0	0	54	0	7	0	0	0	0	306	1,269	0	0	0	0
10:00 AM	0	0	69	54	0	24	91	0	0	76	0	9	0	0	0	0	323	1,228	0	0	0	0
10:15 AM	0	0	72	44	0	21	89	1	0	55	1	12	0	0	0	0	295	1,231	0	0	0	0
10:30 AM	0	0	102	48	0	21	98	0	0	64	0	8	0	1	0	3	345	1,237	0	0	0	0
10:45 AM	0	1	88	43	0	9	71	0	0	40	1	10	0	1	0	1	265	1,264	0	0	0	0
11:00 AM	0	1	78	47	0	17	87	1	0	73	1	20	0	0	0	1	326	1,368	0	0	0	0
11:15 AM	0	0	79	33	0	16	87	0	0	72	0	13	0	0	0	1	301	1,395	0	0	0	0
11:30 AM	0	0	103	67	0	18	103	0	0	69	1	10	0	1	0	0	372	1,407	0	0	0	0
11:45 AM	0	0	98	66	0	15	112	0	0	63	0	14	0	0	0	1	369	1,369	0	0	0	0
12:00 PM	0	0	109	47	0	11	86	0	0	75	0	25	0	0	0	0	353	1,308	0	0	0	0
12:15 PM	0	0	78	59	0	11	104	1	0	42	0	17	0	0	1	0	313	1,327	0	0	0	0
12:30 PM	0	3	88	59	0	9	109	0	0	50	0	15	0	0	1	0	334	1,359	0	0	0	0
12:45 PM	0	0	86	37	0	16	95	0	0	63	0	11	0	0	0	0	308	1,340	0	0	0	0
1:00 PM	0	1	90	68	0	9	88	1	0	92	0	22	0	0	0	1	372	1,383	0	0	0	0
1:15 PM	0	0	75	52	0	14	109	0	0	77	0	18	0	0	0	0	345	1,370	0	0	0	0

1:30 PM	0	1	93	45	0	13	120	0	0	38	0	5	0	0	0	0	315	1,343	0	0	0	0
1:45 PM	1	0	93	54	0	12	103	0	0	69	0	19	0	0	0	0	351	1,429	0	0	0	0
2:00 PM	0	1	118	55	0	9	87	0	0	71	0	18	0	0	0	0	359	1,459	0	0	0	0
2:15 PM	0	1	77	62	0	15	97	1	0	49	0	16	0	0	0	0	318	1,495	0	0	0	0
2:30 PM	1	0	107	54	0	15	101	0	0	101	0	21	0	0	0	1	401	1,494	0	0	0	0
2:45 PM	1	0	118	58	0	10	111	0	0	62	1	20	0	0	0	0	381	1,527	0	0	0	0
3:00 PM	0	0	100	47	0	13	107	0	0	102	0	26	0	0	0	0	395	1,468	0	0	0	0
3:15 PM	0	0	99	55	0	10	82	1	0	54	0	15	0	1	0	0	317	1,470	0	0	0	0
3:30 PM	0	1	120	60	0	17	91	0	0	92	0	51	0	2	0	0	434	1,584	0	0	0	0
3:45 PM	0	0	99	34	0	7	87	0	0	74	1	20	0	0	0	0	322	1,574	0	0	0	0
4:00 PM	0	2	105	65	0	18	83	0	0	76	2	43	0	0	2	1	397	1,685	0	0	0	0
4:15 PM	0	1	106	67	0	13	91	0	0	98	3	50	0	1	1	0	431		0	0	0	0
4:30 PM	1	1	124	60	0	15	92	0	0	67	0	64	0	0	0	0	424		0	0	1	0
4:45 PM	1	1	91	49	0	20	98	1	0	96	0	71	0	3	0	2	433		0	0	0	0
Count Total	9	20	3,644	2,344	0	941	3,784	8	0	2,574	12	818	0	12	6	16	14,188		0	0	1	0
Peak Hour	2	5	426	241	0	66	364	1	0	337	5	228	0	4	3	3	1,685		0	0	1	0



ALL TRAFFIC DATA SERVICES

(303) 216-2439

www.alltrafficdata.net


Location: 2 HIGHLAND DR & SH 66 AM

Date: Thursday, June 15, 2023


Peak Hour: 04:00 PM - 05:00 PM

Peak 15-Minutes: 04:30 PM - 04:45 PM


Peak Hour - Motorized Vehicles

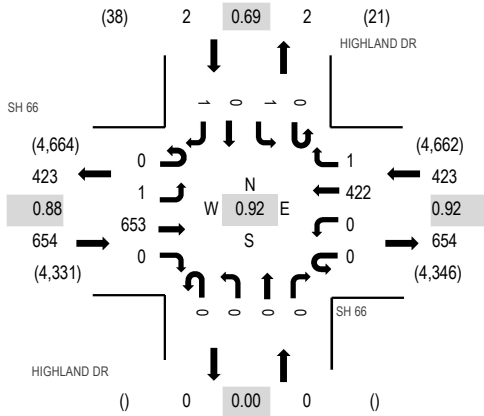

Peak Hour - Bicycles

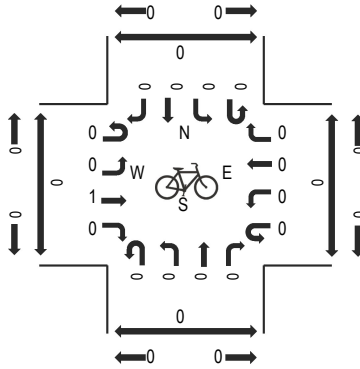

Peak Hour - Pedestrians



Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

Interval Start Time	SH 66				SH 66				HIGHLAND DR				HIGHLAND DR				Total	Rolling Hour	Pedestrian Crossings			
	Eastbound				Westbound				Northbound				Southbound						Pedestrian Crossings			
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right			West	East	South	North
5:00 AM	0	0	9	0	0	0	9	0	0	0	0	0	0	0	0	0	18	117	0	0	0	0
5:15 AM	0	0	15	0	0	0	13	0	0	0	0	0	0	0	0	1	29	168	0	0	0	0
5:30 AM	0	0	11	0	0	0	23	0	0	0	0	0	0	0	0	0	34	231	0	0	0	0
5:45 AM	0	0	18	0	0	0	18	0	0	0	0	0	0	0	0	0	36	323	0	0	0	0
6:00 AM	0	0	31	0	0	0	38	0	0	0	0	0	0	0	0	0	69	427	0	0	0	0
6:15 AM	0	0	36	0	0	0	53	0	0	0	0	0	0	3	0	0	92	506	0	0	0	0
6:30 AM	0	1	50	0	0	0	72	0	0	0	0	0	0	1	0	2	126	555	0	0	0	0
6:45 AM	0	0	51	0	0	0	85	0	0	0	0	0	0	1	0	3	140	628	0	0	0	0
7:00 AM	0	0	56	0	0	0	91	0	0	0	0	0	0	0	0	1	148	691	0	0	0	0
7:15 AM	0	0	47	0	0	0	94	0	0	0	0	0	0	0	0	0	141	731	0	0	0	0
7:30 AM	0	0	76	0	0	0	121	1	0	0	0	0	0	0	0	1	199	784	0	0	0	0
7:45 AM	0	0	74	0	0	0	129	0	0	0	0	0	0	0	0	0	203	780	0	0	0	0
8:00 AM	0	0	83	0	0	0	104	1	0	0	0	0	0	0	0	0	188	782	0	0	0	0
8:15 AM	0	0	72	0	0	0	121	0	0	0	0	0	0	0	0	1	194	786	0	0	0	0
8:30 AM	0	0	84	0	0	0	107	0	0	0	0	0	0	2	0	2	195	777	0	0	0	0
8:45 AM	0	0	82	0	0	0	123	0	0	0	0	0	0	0	0	0	205	771	0	0	0	0
9:00 AM	0	0	90	0	0	0	102	0	0	0	0	0	0	0	0	0	192	753	0	0	0	0
9:15 AM	0	0	75	0	0	0	108	2	0	0	0	0	0	0	0	0	185	736	0	0	0	0
9:30 AM	0	0	78	0	0	0	111	0	0	0	0	0	0	0	0	0	189	761	0	0	0	0
9:45 AM	0	0	70	0	0	0	117	0	0	0	0	0	0	0	0	0	187	786	0	0	0	0
10:00 AM	0	0	71	0	0	0	102	1	0	0	0	0	0	1	0	0	175	771	0	0	0	0
10:15 AM	0	0	90	0	0	0	118	0	0	0	0	0	0	2	0	0	210	772	0	0	0	0
10:30 AM	0	1	98	0	0	0	114	0	0	0	0	0	0	1	0	0	214	752	0	0	0	0
10:45 AM	0	0	94	0	0	0	78	0	0	0	0	0	0	0	0	0	172	771	0	0	0	0
11:00 AM	0	0	75	0	0	0	101	0	0	0	0	0	0	0	0	0	176	826	0	0	0	0
11:15 AM	0	0	85	0	0	0	103	1	0	0	0	0	0	0	0	1	190	878	0	0	0	0
11:30 AM	0	0	122	0	0	0	109	1	0	0	0	0	0	1	0	0	233	895	0	0	0	0
11:45 AM	0	0	105	0	0	0	122	0	0	0	0	0	0	0	0	0	227	879	0	0	0	0
12:00 PM	0	0	126	0	0	0	102	0	0	0	0	0	0	0	0	0	228	850	0	0	0	0
12:15 PM	0	0	93	0	0	0	111	1	0	0	0	0	0	2	0	0	207	849	0	0	0	0
12:30 PM	0	0	95	0	0	0	120	1	0	0	0	0	0	0	0	1	217	846	0	0	0	0
12:45 PM	0	1	96	0	0	0	101	0	0	0	0	0	0	0	0	0	198	855	0	0	0	0
1:00 PM	0	2	115	0	0	0	109	1	0	0	0	0	0	0	0	0	227	874	0	0	0	0
1:15 PM	0	0	91	0	0	0	112	0	0	0	0	0	0	1	0	0	204	874	0	0	0	0

1:30 PM	0	0	96	0	0	0	129	0	0	0	0	0	0	0	0	1	226	873	0	0	0	0
1:45 PM	0	0	110	0	0	0	104	1	0	0	0	0	0	1	0	1	217	880	0	0	0	0
2:00 PM	0	0	130	0	0	0	97	0	0	0	0	0	0	0	0	0	227	918	0	0	0	0
2:15 PM	0	0	93	0	0	0	109	0	0	0	0	0	0	1	0	0	203	936	0	0	0	0
2:30 PM	0	0	122	0	0	0	108	1	0	0	0	0	0	1	0	1	233	939	0	0	0	0
2:45 PM	0	0	131	0	0	0	123	0	0	0	0	0	0	1	0	0	255	976	0	0	0	0
3:00 PM	0	0	126	0	0	0	118	1	0	0	0	0	0	0	0	0	245	943	0	0	0	0
3:15 PM	0	0	117	0	0	0	89	0	0	0	0	0	0	0	0	0	206	940	0	0	0	0
3:30 PM	0	0	164	0	0	0	105	0	0	0	0	0	0	1	0	0	270	989	0	0	0	0
3:45 PM	0	0	119	0	0	0	102	1	0	0	0	0	0	0	0	0	222	1,012	0	0	0	0
4:00 PM	0	1	143	0	0	0	97	0	0	0	0	0	0	0	0	1	242	1,079	0	0	0	0
4:15 PM	0	0	154	0	0	0	99	1	0	0	0	0	0	1	0	0	255		0	0	0	0
4:30 PM	0	0	186	0	0	0	107	0	0	0	0	0	0	0	0	0	293		0	0	0	0
4:45 PM	0	0	170	0	0	0	119	0	0	0	0	0	0	0	0	0	289		0	0	0	0
Count Total	0	6	4,325	0	0	0	4,647	15	0	0	0	0	0	21	0	17	9,031		0	0	0	0
Peak Hour	0	1	653	0	0	0	422	1	0	0	0	0	0	1	0	1	1,079		0	0	0	0



ALL TRAFFIC DATA SERVICES

(303) 216-2439

www.alltrafficdata.net


Location: 3 CEMEX DRIVEWAY & SH 66 AM

Date: Thursday, June 15, 2023


Peak Hour: 04:00 PM - 05:00 PM

Peak 15-Minutes: 04:45 PM - 05:00 PM


Peak Hour - Motorized Vehicles

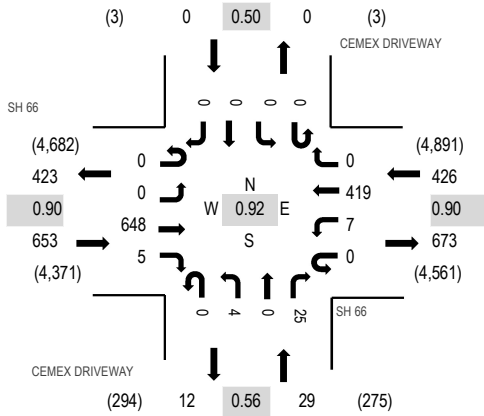

Peak Hour - Bicycles

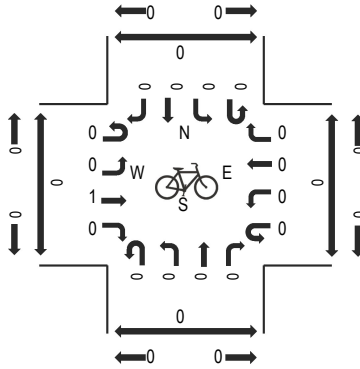

Peak Hour - Pedestrians



Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

Interval Start Time	SH 66				SH 66				CEMEX DRIVEWAY				CEMEX DRIVEWAY				Total	Rolling Hour	Pedestrian Crossings			
	Eastbound				Westbound				Northbound				Southbound						Pedestrian Crossings			
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right			West	East	South	North
5:00 AM	0	0	9	0	0	5	9	0	0	0	0	0	0	0	0	0	23	144	0	0	0	0
5:15 AM	0	0	15	0	0	3	13	0	0	0	0	2	0	0	0	0	33	203	0	0	0	0
5:30 AM	0	0	11	0	0	10	23	0	0	0	0	0	0	0	0	0	44	275	0	0	0	0
5:45 AM	0	0	16	0	0	6	18	0	0	0	0	4	0	0	0	0	44	369	0	0	0	0
6:00 AM	0	0	32	1	0	8	37	0	0	0	0	4	0	0	0	0	82	481	0	0	0	0
6:15 AM	0	0	36	2	0	12	52	0	0	1	0	2	0	0	0	0	105	551	0	0	0	0
6:30 AM	0	0	49	2	0	11	71	0	0	1	0	4	0	0	0	0	138	598	0	0	0	0
6:45 AM	0	0	51	2	0	15	82	0	0	2	0	4	0	0	0	0	156	668	0	0	0	0
7:00 AM	0	0	53	2	0	5	89	0	0	1	0	2	0	0	0	0	152	730	0	0	0	0
7:15 AM	0	0	47	1	0	7	96	0	0	0	0	1	0	0	0	0	152	773	0	0	0	0
7:30 AM	0	0	74	1	0	7	123	0	0	0	0	3	0	0	0	0	208	820	0	0	0	0
7:45 AM	0	0	75	1	0	6	133	0	0	0	0	3	0	0	0	0	218	819	0	0	0	0
8:00 AM	0	0	80	1	0	6	101	0	0	1	0	6	0	0	0	0	195	818	0	0	0	0
8:15 AM	0	0	71	1	0	6	118	0	0	0	0	3	0	0	0	0	199	823	0	0	0	0
8:30 AM	0	0	85	1	0	8	105	0	0	1	0	7	0	0	0	0	207	820	0	0	0	0
8:45 AM	0	0	76	3	0	8	123	0	0	1	0	6	0	0	0	0	217	809	0	0	0	0
9:00 AM	0	0	91	0	0	5	99	0	0	1	0	4	0	0	0	0	200	790	0	0	0	0
9:15 AM	0	0	73	1	0	5	111	0	0	0	0	6	0	0	0	0	196	780	0	0	0	0
9:30 AM	0	0	78	1	0	2	104	0	0	5	0	6	0	0	0	0	196	808	0	0	0	0
9:45 AM	0	0	71	1	0	6	113	0	0	2	0	5	0	0	0	0	198	834	0	0	0	0
10:00 AM	0	0	71	1	0	4	106	0	0	1	0	7	0	0	0	0	190	820	0	0	0	0
10:15 AM	0	0	89	0	0	5	119	0	0	1	0	10	0	0	0	0	224	838	0	0	0	0
10:30 AM	0	0	95	2	0	4	114	0	0	0	1	5	0	0	1	0	222	815	0	0	0	0
10:45 AM	0	0	97	0	0	3	80	0	0	0	1	3	0	0	0	0	184	835	0	0	0	0
11:00 AM	0	0	102	1	0	4	97	0	0	0	0	4	0	0	0	0	208	889	0	0	0	0
11:15 AM	0	0	83	1	0	7	102	0	0	2	0	6	0	0	0	0	201	920	0	0	0	0
11:30 AM	0	0	123	1	0	4	108	0	0	3	1	2	0	0	0	0	242	936	0	0	0	0
11:45 AM	0	0	104	1	0	6	120	0	0	0	0	7	0	0	0	0	238	923	0	0	0	0
12:00 PM	0	0	122	3	0	4	102	0	0	0	0	8	0	0	0	0	239	888	0	0	0	0
12:15 PM	0	0	93	0	0	6	114	0	0	0	0	4	0	0	0	0	217	890	0	0	0	0
12:30 PM	0	0	94	1	0	6	125	0	0	0	0	3	0	0	0	0	229	883	0	0	0	0
12:45 PM	0	0	94	0	0	4	100	0	0	0	0	5	0	0	0	0	203	886	0	0	0	0
1:00 PM	0	0	118	0	0	4	115	0	0	0	0	4	0	0	0	0	241	909	0	0	0	0
1:15 PM	0	0	87	1	0	1	114	0	0	0	0	7	0	0	0	0	210	907	0	0	0	0

1:30 PM	0	0	95	1	0	2	129	0	0	0	0	5	0	0	0	0	232	911	0	0	0	0
1:45 PM	0	0	110	2	0	9	101	0	0	2	0	1	0	0	1	0	226	924	0	0	0	0
2:00 PM	0	0	127	0	0	3	102	0	0	0	0	7	0	0	0	0	239	965	0	0	0	0
2:15 PM	0	0	97	0	0	4	107	0	0	2	0	3	0	1	0	0	214	977	0	0	0	0
2:30 PM	0	0	124	0	0	3	108	0	0	1	0	9	0	0	0	0	245	985	0	0	0	0
2:45 PM	0	0	134	0	0	2	124	0	0	0	0	7	0	0	0	0	267	1,028	0	0	0	0
3:00 PM	0	0	123	0	0	3	122	0	0	0	0	3	0	0	0	0	251	998	0	0	0	0
3:15 PM	0	0	119	0	0	2	91	0	0	0	0	10	0	0	0	0	222	989	0	0	0	0
3:30 PM	0	0	162	4	0	3	101	0	0	4	0	14	0	0	0	0	288	1,035	0	0	0	0
3:45 PM	0	0	120	2	0	4	106	0	0	0	0	5	0	0	0	0	237	1,043	0	0	0	0
4:00 PM	0	0	138	2	0	0	95	0	0	2	0	5	0	0	0	0	242	1,108	0	0	0	0
4:15 PM	0	0	158	0	0	4	98	0	0	1	0	7	0	0	0	0	268		0	0	0	0
4:30 PM	0	0	181	1	0	1	107	0	0	0	0	6	0	0	0	0	296		0	0	0	0
4:45 PM	0	0	171	2	0	2	119	0	0	1	0	7	0	0	0	0	302		0	0	0	0
Count Total	0	0	4,324	47	0	245	4,646	0	0	36	3	236	0	1	2	0	9,540		0	0	0	0
Peak Hour	0	0	648	5	0	7	419	0	0	4	0	25	0	0	0	0	1,108		0	0	0	0



ALL TRAFFIC DATA SERVICES

(303) 216-2439

www.alltrafficdata.net


Location: 4 N 53RD ST & SH 66 AM

Date: Thursday, June 15, 2023


Peak Hour: 04:00 PM - 05:00 PM

Peak 15-Minutes: 04:45 PM - 05:00 PM


Peak Hour - Motorized Vehicles

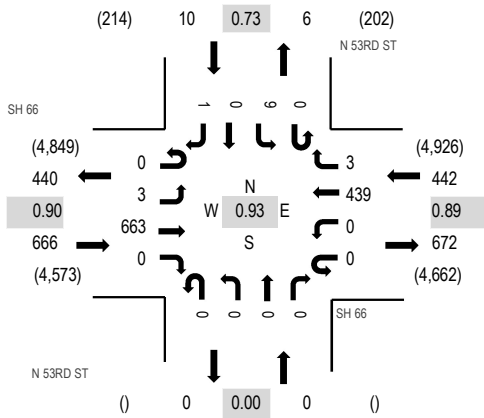

Peak Hour - Bicycles

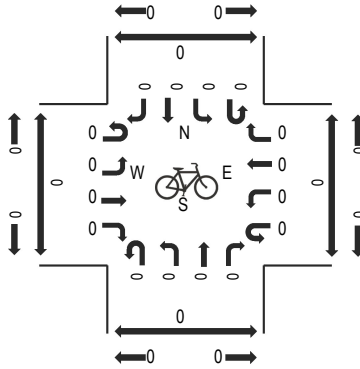

Peak Hour - Pedestrians



Note: Total study counts contained in parentheses.

Traffic Counts - Motorized Vehicles

Interval Start Time	SH 66 Eastbound				SH 66 Westbound				N 53RD ST Northbound				N 53RD ST Southbound				Total	Rolling Hour	Pedestrian Crossings			
	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right	U-Turn	Left	Thru	Right			West	East	South	North
5:00 AM	0	1	9	0	0	0	11	1	0	0	0	0	0	0	0	0	22	141	0	0	0	0
5:15 AM	0	0	17	0	0	0	14	2	0	0	0	0	0	0	0	1	34	204	0	0	0	0
5:30 AM	0	0	11	0	0	0	22	3	0	0	0	0	0	0	0	1	37	265	0	0	0	0
5:45 AM	0	0	19	0	0	0	25	3	0	0	0	0	0	1	0	0	48	364	0	0	0	0
6:00 AM	0	0	39	0	0	0	42	1	0	0	0	0	0	2	0	1	85	459	0	0	0	0
6:15 AM	0	2	36	0	0	0	56	1	0	0	0	0	0	0	0	0	95	525	0	0	0	0
6:30 AM	1	0	52	0	0	0	81	0	0	0	0	0	0	2	0	0	136	576	0	0	0	0
6:45 AM	2	0	51	0	0	0	87	2	0	0	0	0	0	1	0	0	143	645	0	0	0	0
7:00 AM	1	0	57	0	0	0	88	0	0	0	0	0	0	2	0	3	151	722	0	0	0	0
7:15 AM	0	1	48	0	0	0	96	0	0	0	0	0	0	0	0	1	146	764	0	0	0	0
7:30 AM	0	0	76	0	0	0	126	1	0	0	0	0	0	1	0	1	205	813	0	0	0	0
7:45 AM	0	0	78	0	0	0	138	0	0	0	0	0	0	3	0	1	220	820	0	0	0	0
8:00 AM	0	4	82	0	0	0	101	5	0	0	0	0	0	1	0	0	193	813	0	0	0	0
8:15 AM	0	1	71	0	0	0	113	8	0	0	0	0	0	2	0	0	195	825	0	0	0	0
8:30 AM	0	1	95	0	0	0	108	4	0	0	0	0	0	3	0	1	212	829	0	0	0	0
8:45 AM	0	0	78	0	0	0	127	4	0	0	0	0	0	1	0	3	213	817	0	0	0	0
9:00 AM	0	3	92	0	0	0	104	2	0	0	0	0	0	3	0	1	205	812	0	0	0	0
9:15 AM	0	2	79	0	0	0	110	7	0	0	0	0	0	1	0	0	199	804	0	0	0	0
9:30 AM	0	0	81	0	0	0	104	8	0	0	0	0	0	5	0	2	200	834	0	0	0	0
9:45 AM	0	0	79	0	0	0	118	4	0	0	0	0	0	5	0	2	208	858	0	0	0	0
10:00 AM	0	2	78	0	0	0	103	9	0	0	0	0	0	4	0	1	197	843	0	0	0	0
10:15 AM	0	0	96	0	0	0	124	2	0	0	0	0	0	3	0	4	229	863	0	0	0	0
10:30 AM	0	2	97	0	0	0	114	4	0	0	0	0	0	6	0	1	224	843	0	0	0	0
10:45 AM	0	1	102	0	0	0	80	3	0	0	0	0	0	6	0	1	193	860	0	0	0	0
11:00 AM	0	0	107	0	0	0	104	0	0	0	0	0	0	4	0	2	217	922	0	0	0	0
11:15 AM	0	0	93	0	0	0	109	3	0	0	0	0	0	4	0	0	209	940	0	0	0	0
11:30 AM	0	2	124	0	0	0	109	3	0	0	0	0	0	3	0	0	241	958	0	0	0	0
11:45 AM	0	2	114	0	0	0	123	2	0	0	0	0	0	8	0	6	255	955	0	0	0	0
12:00 PM	0	1	123	0	0	0	101	5	0	0	0	0	0	2	0	3	235	906	0	0	0	0
12:15 PM	0	4	98	0	0	0	118	3	0	0	0	0	0	3	0	1	227	917	0	0	0	0
12:30 PM	0	1	96	0	0	0	124	9	0	0	0	0	0	3	0	5	238	917	0	0	0	0
12:45 PM	0	1	97	0	0	0	104	1	0	0	0	0	0	2	0	1	206	921	0	0	0	0
1:00 PM	0	1	117	0	0	0	112	6	0	0	0	0	0	5	0	5	246	943	0	0	0	0
1:15 PM	0	1	99	0	0	0	114	8	0	0	0	0	0	4	0	1	227	952	0	0	0	0

1:30 PM	0	1	95	0	0	0	132	5	0	0	0	0	0	7	0	2	242	954	0	0	0	0
1:45 PM	0	2	117	0	0	0	102	3	0	0	0	0	0	3	0	1	228	969	0	0	0	0
2:00 PM	0	2	130	0	0	0	111	2	0	0	0	0	0	8	0	2	255	1,009	0	0	0	0
2:15 PM	0	2	102	0	0	0	111	3	0	0	0	0	0	11	0	0	229	1,015	0	0	0	0
2:30 PM	0	1	129	0	0	0	111	3	0	0	0	0	0	8	0	5	257	1,018	0	0	0	0
2:45 PM	0	3	138	0	0	0	121	4	0	0	0	0	0	2	0	0	268	1,045	0	0	0	0
3:00 PM	0	4	124	0	0	0	122	4	0	0	0	0	0	3	0	4	261	1,025	0	0	0	0
3:15 PM	0	1	125	0	0	0	98	4	0	0	0	0	0	3	0	1	232	1,008	0	0	0	0
3:30 PM	0	2	168	0	0	0	107	3	0	0	0	0	0	3	0	1	284	1,051	0	0	0	0
3:45 PM	0	0	133	0	0	0	114	0	0	0	0	0	0	0	0	1	248	1,066	0	0	0	0
4:00 PM	0	0	141	0	0	0	98	0	0	0	0	0	0	5	0	0	244	1,118	0	0	0	0
4:15 PM	0	1	166	0	0	0	105	0	0	0	0	0	0	3	0	0	275		0	0	0	0
4:30 PM	0	2	182	0	0	0	110	3	0	0	0	0	0	1	0	1	299		0	0	0	0
4:45 PM	0	0	174	0	0	0	126	0	0	0	0	0	0	0	0	0	300		0	0	0	0
Count Total	4	54	4,515	0	0	0	4,778	148	0	0	0	0	0	147	0	67	9,713		0	0	0	0
Peak Hour	0	3	663	0	0	0	439	3	0	0	0	0	0	9	0	1	1,118		0	0	0	0


APPENDIX B

DRCOG Model Assigned All Day Traffic Volumes

Model Assigned 2020 All-Day Traffic Volumes

(In Thousands; Rounded values < 1,000 not displayed)

Model Cycle: RTP 2022, Focus 2.3.1, August 2022

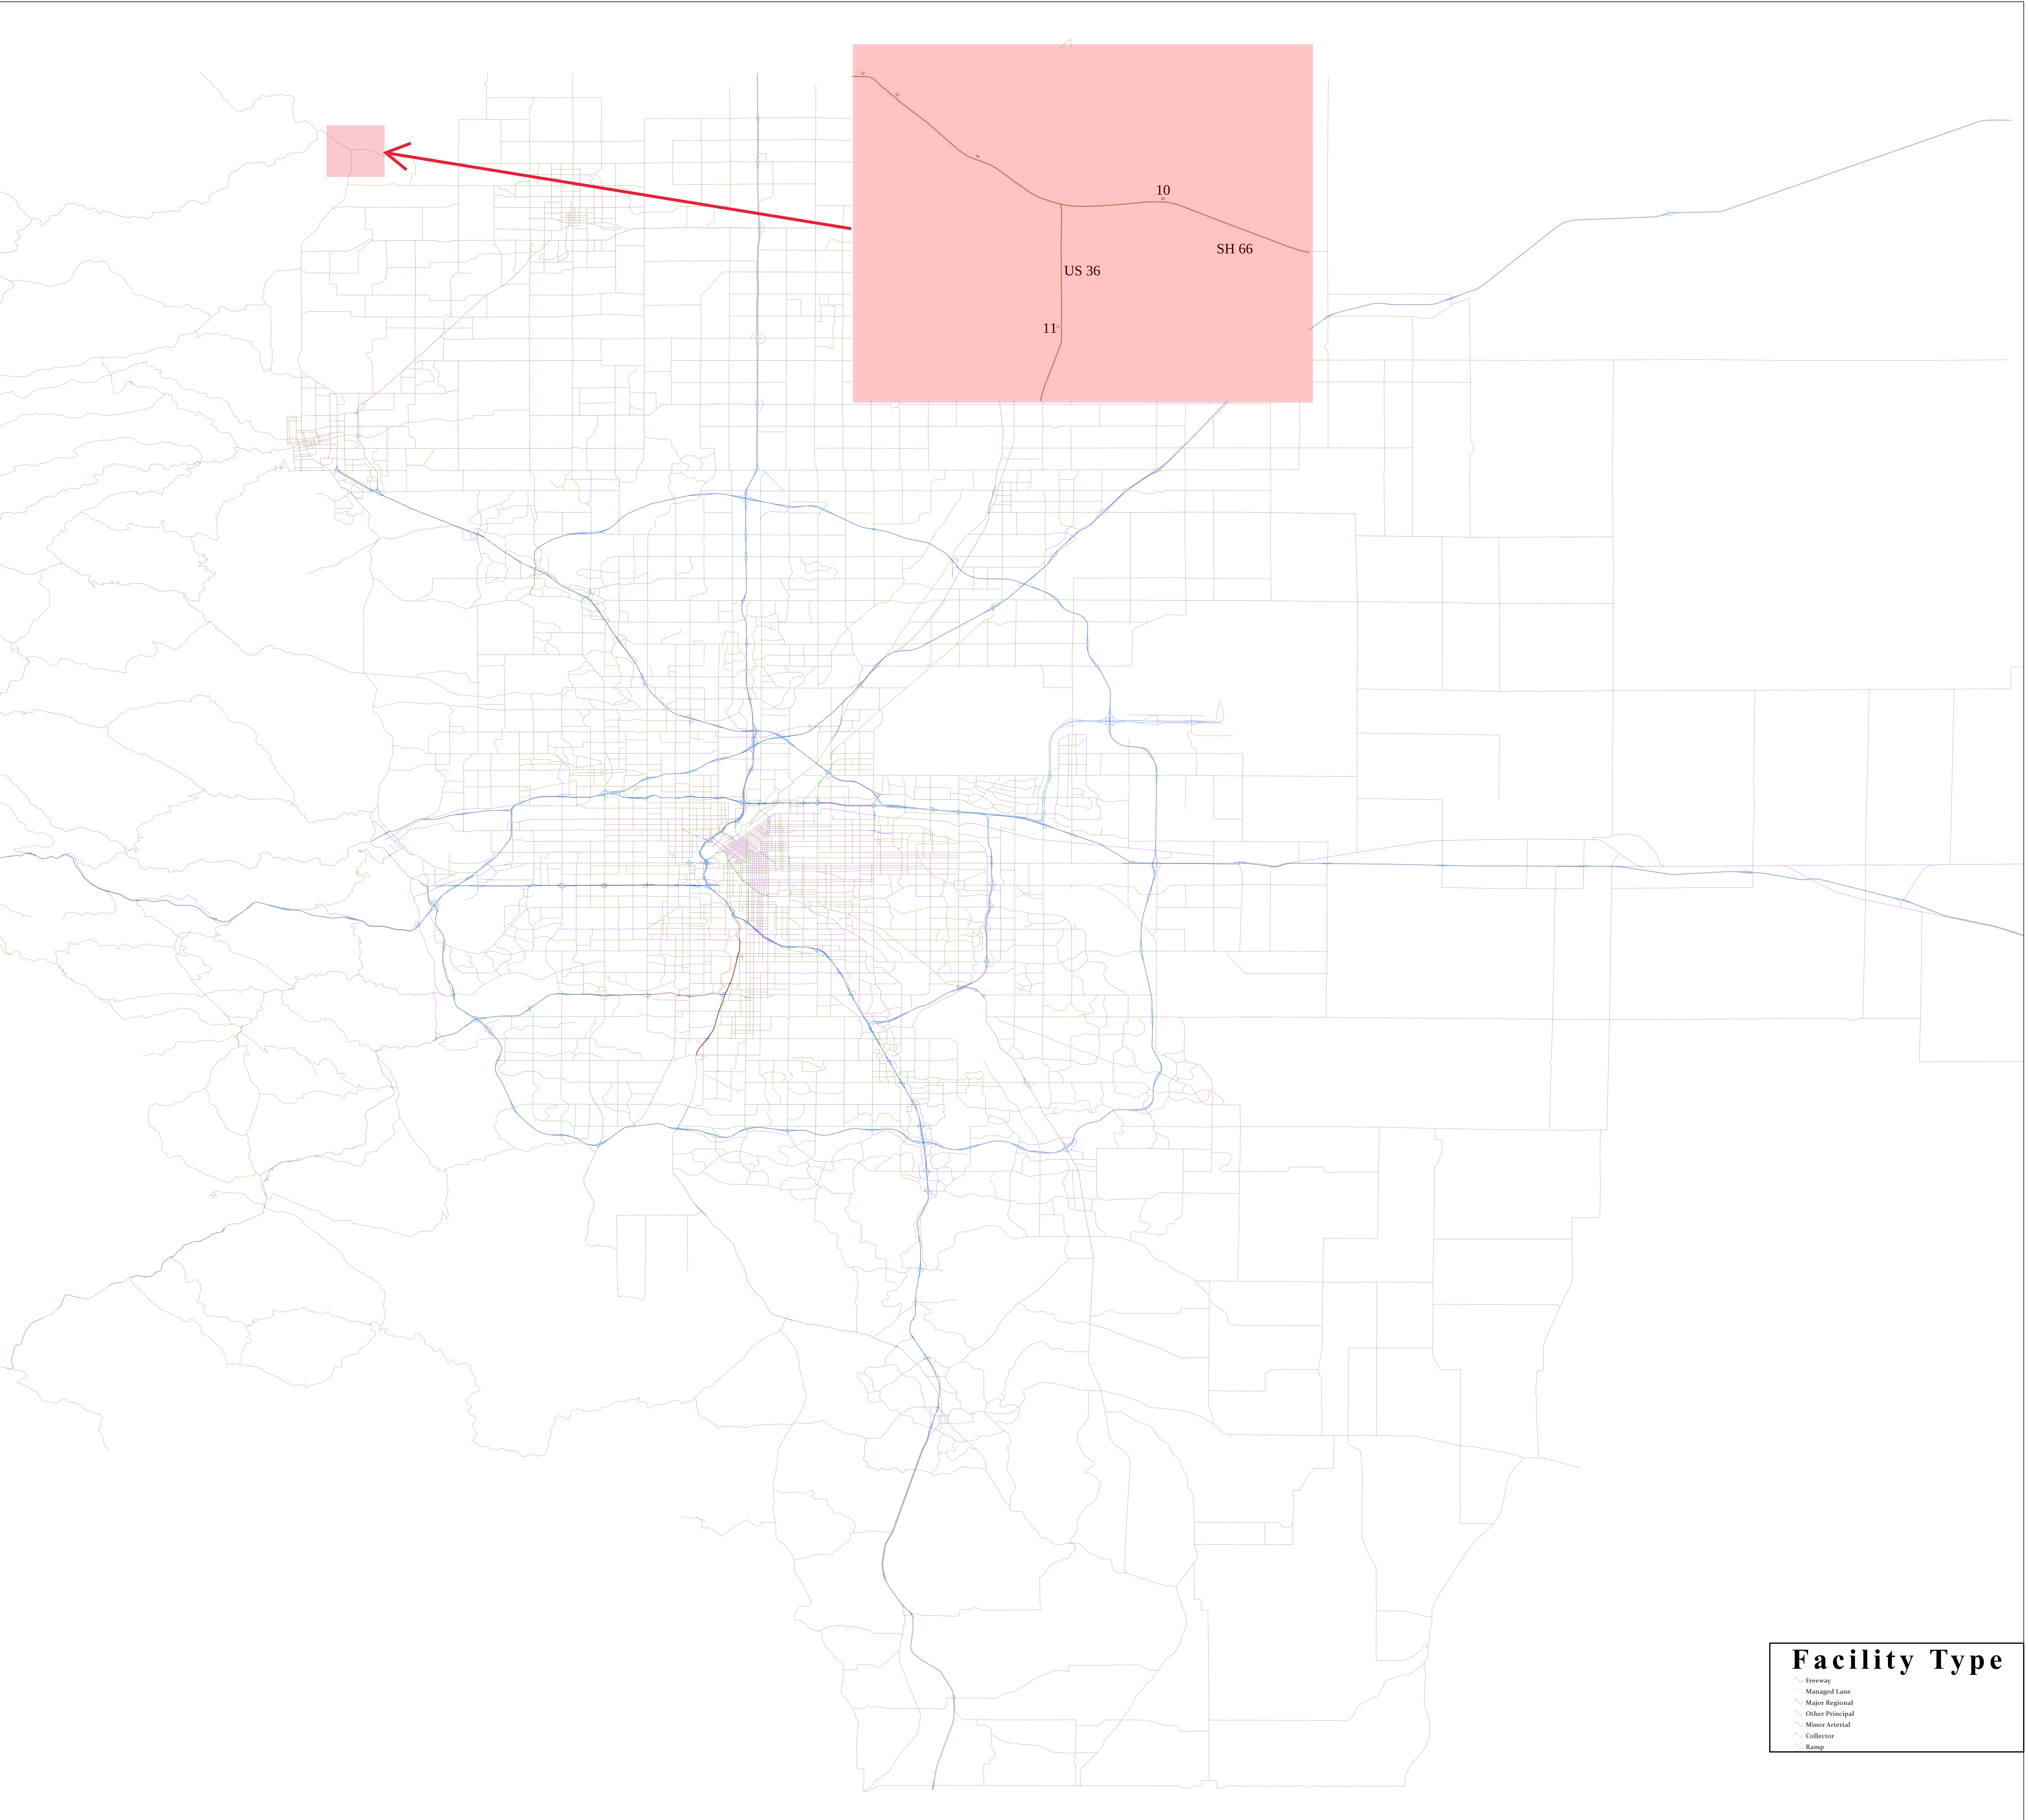

Facility Type

Freeway

Managed Lane

Major Regional

Other Principal

Minor Arterial

Collector


Ramp

Model Assigned 2050 All-Day Traffic Volumes

(In Thousands; Rounded values < 1,000 not displayed)

Use data with 2020 assigned volume map to derive growth.

Model Cycle: RTP 2022, Focus 2.3.1, August 2022

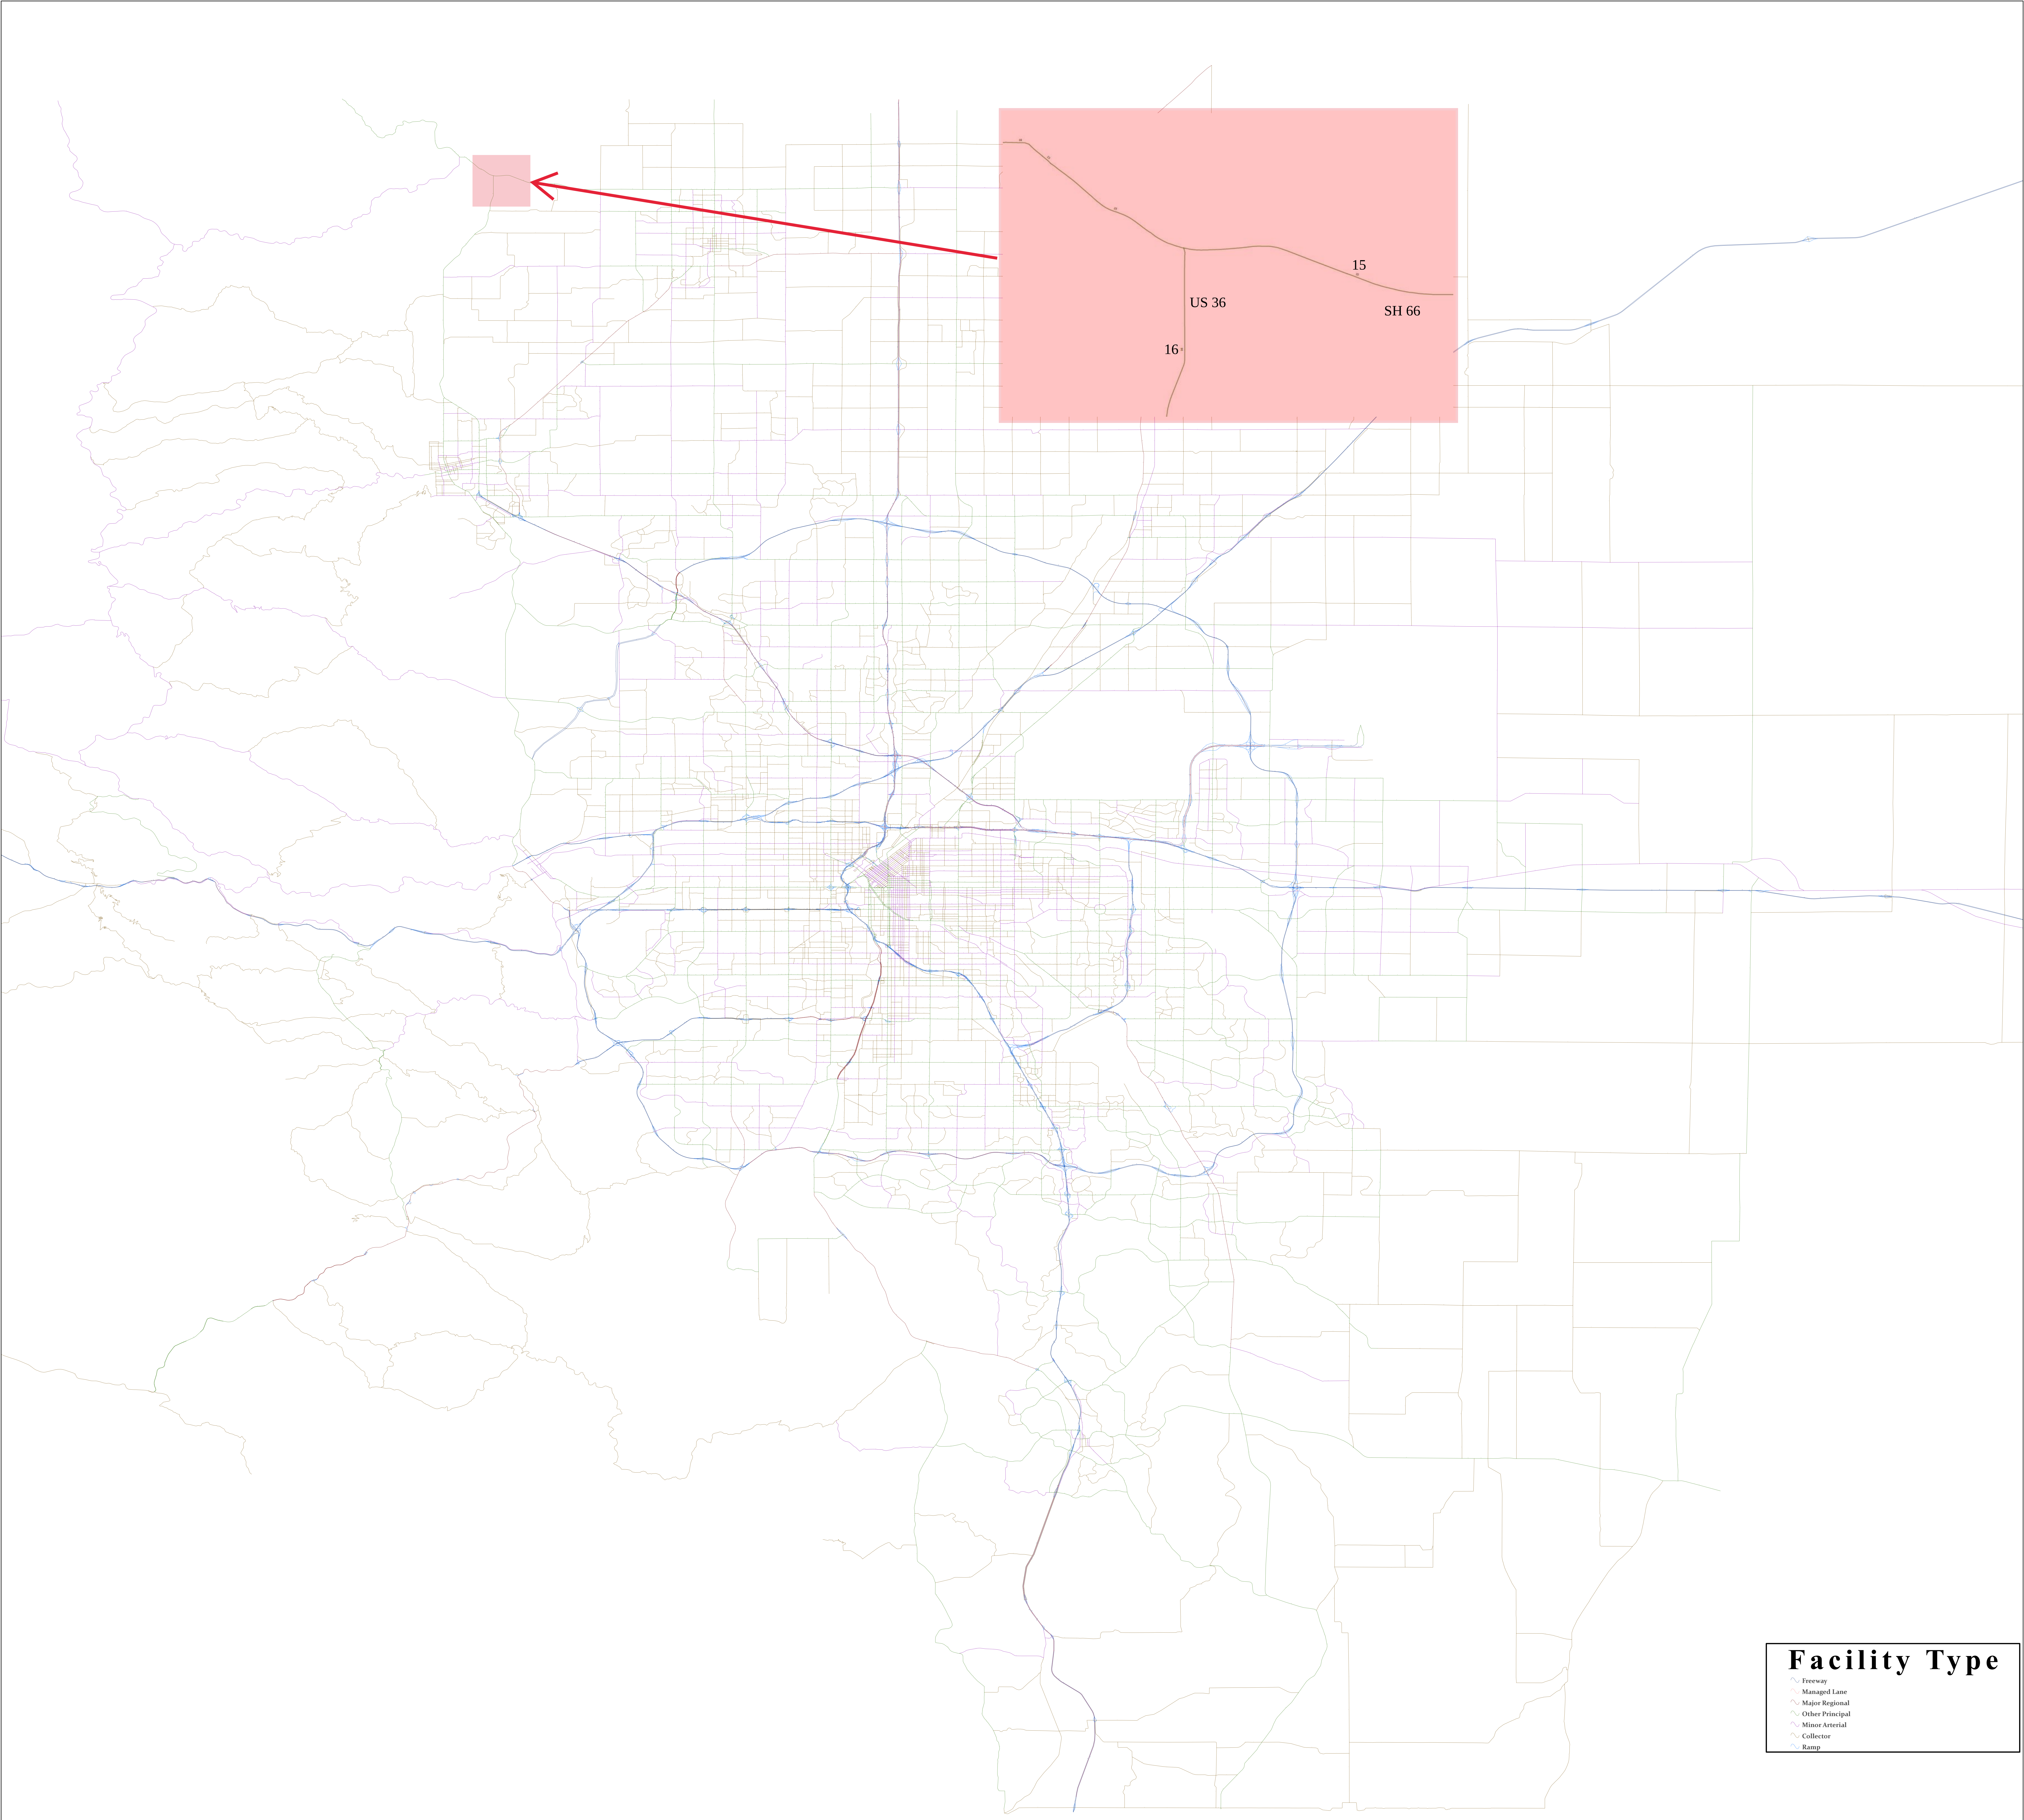

APPENDIX C

Synchro Delay/LOS Results

HCM Signalized Intersection Capacity Analysis

1: US 36/Highland Dr & SH 66

2022 Existing - AM
08/07/2023

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	2	282	273	185	326	1	177	1	63	0	1	2
Future Volume (vph)	2	282	273	185	326	1	177	1	63	0	1	2
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	6.0	6.0	6.0	5.0	6.0		6.0	6.0			6.0	
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95		0.95	0.95			1.00	
Frt	1.00	1.00	0.85	1.00	1.00		1.00	0.92			0.92	
Flt Protected	0.95	1.00	1.00	0.95	1.00		0.95	0.98			1.00	
Satd. Flow (prot)	1805	3610	1615	1805	3608		1715	1623			1740	
Flt Permitted	0.55	1.00	1.00	0.41	1.00		0.95	0.98			1.00	
Satd. Flow (perm)	1036	3610	1615	777	3608		1715	1623			1740	
Peak-hour factor, PHF	0.87	0.87	0.87	0.95	0.95	0.95	0.91	0.91	0.91	0.38	0.38	0.38
Adj. Flow (vph)	2	324	314	195	343	1	195	1	69	0	3	5
RTOR Reduction (vph)	0	0	240	0	0	0	0	43	0	0	5	0
Lane Group Flow (vph)	2	324	74	195	344	0	136	86	0	0	3	0
Heavy Vehicles (%)	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%
Turn Type	Perm	NA	Perm	pm+pt	NA		Split	NA			NA	
Protected Phases		2		1	6		4	4		8	8	
Permitted Phases	2		2	6								
Actuated Green, G (s)	13.9	13.9	13.9	28.5	28.5		11.3	11.3			1.0	
Effective Green, g (s)	13.9	13.9	13.9	28.5	28.5		11.3	11.3			1.0	
Actuated g/C Ratio	0.24	0.24	0.24	0.48	0.48		0.19	0.19			0.02	
Clearance Time (s)	6.0	6.0	6.0	5.0	6.0		6.0	6.0			6.0	
Vehicle Extension (s)	4.0	4.0	4.0	3.0	4.0		4.0	4.0			4.0	
Lane Grp Cap (vph)	244	853	381	544	1748		329	311			29	
v/s Ratio Prot		0.09		c0.06	0.10		c0.08	0.05			c0.00	
v/s Ratio Perm	0.00		0.05	c0.12								
v/c Ratio	0.01	0.38	0.19	0.36	0.20		0.41	0.28			0.11	
Uniform Delay, d1	17.2	18.8	18.0	9.0	8.6		20.8	20.3			28.5	
Progression Factor	1.00	1.00	1.00	1.00	1.00		1.00	1.00			1.00	
Incremental Delay, d2	0.0	0.4	0.3	0.4	0.1		1.2	0.7			2.2	
Delay (s)	17.2	19.2	18.3	9.4	8.7		22.0	20.9			30.7	
Level of Service	B	B	B	A	A		C	C			C	
Approach Delay (s)		18.8			9.0			21.5			30.7	
Approach LOS		B			A			C			C	
Intersection Summary												
HCM 2000 Control Delay			15.7			HCM 2000 Level of Service			B			
HCM 2000 Volume to Capacity ratio			0.40									
Actuated Cycle Length (s)			58.8			Sum of lost time (s)			23.0			
Intersection Capacity Utilization			46.3%			ICU Level of Service			A			
Analysis Period (min)			15									
c Critical Lane Group												

Intersection

Int Delay, s/veh 0.2

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	0	352	495	0	2	3
Future Vol, veh/h	0	352	495	0	2	3
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	91	91	92	92	31	31
Heavy Vehicles, %	0	0	0	0	0	0
Mvmt Flow	0	387	538	0	6	10

Major/Minor	Major1	Major2	Minor2
Conflicting Flow All	538	0	0 925 538
Stage 1	-	-	- 538 -
Stage 2	-	-	- 387 -
Critical Hdwy	4.1	-	- 6.4 6.2
Critical Hdwy Stg 1	-	-	- 5.4 -
Critical Hdwy Stg 2	-	-	- 5.4 -
Follow-up Hdwy	2.2	-	- 3.5 3.3
Pot Cap-1 Maneuver	1040	-	- 301 547
Stage 1	-	-	- 589 -
Stage 2	-	-	- 691 -
Platoon blocked, %	-	-	-
Mov Cap-1 Maneuver	1040	-	- 301 547
Mov Cap-2 Maneuver	-	-	- 301 -
Stage 1	-	-	- 589 -
Stage 2	-	-	- 691 -

Approach	EB	WB	SB
HCM Control Delay, s	0	0	14.1
HCM LOS			B

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1
Capacity (veh/h)	1040	-	-	-	412
HCM Lane V/C Ratio	-	-	-	-	0.039
HCM Control Delay (s)	0	-	-	-	14.1
HCM Lane LOS	A	-	-	-	B
HCM 95th %tile Q(veh)	0	-	-	-	0.1

Intersection

Int Delay, s/veh 0.8

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑	↑	↑	↑			↑			↑	
Traffic Vol, veh/h	0	350	6	31	473	0	4	0	28	0	0	0
Future Vol, veh/h	0	350	6	31	473	0	4	0	28	0	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	320	500	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	72	72	72	92	92	92
Heavy Vehicles, %	0	0	0	0	0	0	0	0	0	0	0	0
Mvmt Flow	0	389	7	34	526	0	6	0	39	0	0	0

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	-	0	0	396	0	0	983	983	389	1006	990	526
Stage 1	-	-	-	-	-	-	389	389	-	594	594	-
Stage 2	-	-	-	-	-	-	594	594	-	412	396	-
Critical Hdwy	-	-	-	4.1	-	-	7.1	6.5	6.2	7.1	6.5	6.2
Critical Hdwy Stg 1	-	-	-	-	-	-	6.1	5.5	-	6.1	5.5	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.1	5.5	-	6.1	5.5	-
Follow-up Hdwy	-	-	-	2.2	-	-	3.5	4	3.3	3.5	4	3.3
Pot Cap-1 Maneuver	0	-	-	1174	-	0	230	251	664	222	248	556
Stage 1	0	-	-	-	-	0	639	612	-	495	496	-
Stage 2	0	-	-	-	-	0	495	496	-	621	607	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	1174	-	-	225	244	664	204	241	556
Mov Cap-2 Maneuver	-	-	-	-	-	-	225	244	-	204	241	-
Stage 1	-	-	-	-	-	-	639	612	-	495	482	-
Stage 2	-	-	-	-	-	-	481	482	-	585	607	-

Approach	EB	WB	NB	SB
HCM Control Delay, s	0	0.5	12.4	0
HCM LOS			B	A

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	SBLn1
Capacity (veh/h)	534	-	-	1174	-	-
HCM Lane V/C Ratio	0.083	-	-	0.029	-	-
HCM Control Delay (s)	12.4	-	-	8.2	-	0
HCM Lane LOS	B	-	-	A	-	A
HCM 95th %tile Q(veh)	0.3	-	-	0.1	-	-

Intersection

Int Delay, s/veh 0.3

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	6	386	494	21	8	5
Future Vol, veh/h	6	386	494	21	8	5
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	91	91	89	89	81	81
Heavy Vehicles, %	0	0	0	0	0	0
Mvmt Flow	7	424	555	24	10	6

Major/Minor	Major1	Major2	Minor2
Conflicting Flow All	579	0	0 1005 567
Stage 1	-	-	- 567 -
Stage 2	-	-	- 438 -
Critical Hdwy	4.1	-	- 6.4 6.2
Critical Hdwy Stg 1	-	-	- 5.4 -
Critical Hdwy Stg 2	-	-	- 5.4 -
Follow-up Hdwy	2.2	-	- 3.5 3.3
Pot Cap-1 Maneuver	1005	-	- 270 527
Stage 1	-	-	- 572 -
Stage 2	-	-	- 655 -
Platoon blocked, %	-	-	-
Mov Cap-1 Maneuver	1005	-	- 268 527
Mov Cap-2 Maneuver	-	-	- 268 -
Stage 1	-	-	- 567 -
Stage 2	-	-	- 655 -

Approach	EB	WB	SB
HCM Control Delay, s	0.1	0	16.5
HCM LOS			C

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1
Capacity (veh/h)	1005	-	-	-	330
HCM Lane V/C Ratio	0.007	-	-	-	0.049
HCM Control Delay (s)	8.6	0	-	-	16.5
HCM Lane LOS	A	A	-	-	C
HCM 95th %tile Q(veh)	0	-	-	-	0.2

HCM Signalized Intersection Capacity Analysis

1: US 36/Highland Dr & SH 66

2022 Existing - PM
08/07/2023

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	7	428	242	65	366	1	339	5	227	4	3	3
Future Volume (vph)	7	428	242	65	366	1	339	5	227	4	3	3
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	6.0	6.0	6.0	5.0	6.0		6.0	6.0			6.0	
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95		0.95	0.95			1.00	
Frt	1.00	1.00	0.85	1.00	1.00		1.00	0.88			0.96	
Flt Protected	0.95	1.00	1.00	0.95	1.00		0.95	0.99			0.98	
Satd. Flow (prot)	1805	3610	1615	1805	3609		1715	1568			1787	
Flt Permitted	0.52	1.00	1.00	0.33	1.00		0.95	0.99			0.98	
Satd. Flow (perm)	986	3610	1615	624	3609		1715	1568			1787	
Peak-hour factor, PHF	0.91	0.91	0.91	0.93	0.93	0.93	0.85	0.85	0.85	0.50	0.50	0.50
Adj. Flow (vph)	8	470	266	70	394	1	399	6	267	8	6	6
RTOR Reduction (vph)	0	0	148	0	0	0	0	159	0	0	6	0
Lane Group Flow (vph)	8	470	118	70	395	0	351	162	0	0	14	0
Heavy Vehicles (%)	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%
Turn Type	Perm	NA	Perm	pm+pt	NA		Split	NA		Split	NA	
Protected Phases		2		1	6		4	4		8	8	
Permitted Phases	2		2	6								
Actuated Green, G (s)	18.6	18.6	18.6	29.9	29.9		21.9	21.9			2.4	
Effective Green, g (s)	18.6	18.6	18.6	29.9	29.9		21.9	21.9			2.4	
Actuated g/C Ratio	0.26	0.26	0.26	0.41	0.41		0.30	0.30			0.03	
Clearance Time (s)	6.0	6.0	6.0	5.0	6.0		6.0	6.0			6.0	
Vehicle Extension (s)	4.0	4.0	4.0	3.0	4.0		4.0	4.0			4.0	
Lane Grp Cap (vph)	254	930	416	361	1494		520	475			59	
v/s Ratio Prot		c0.13		0.02	c0.11		c0.20	0.10			c0.01	
v/s Ratio Perm	0.01		0.07	0.06								
v/c Ratio	0.03	0.51	0.28	0.19	0.26		0.68	0.34			0.24	
Uniform Delay, d1	20.1	22.9	21.5	13.3	13.9		22.0	19.5			34.0	
Progression Factor	1.00	1.00	1.00	1.00	1.00		1.00	1.00			1.00	
Incremental Delay, d2	0.1	0.6	0.5	0.3	0.1		3.8	0.6			2.9	
Delay (s)	20.1	23.5	22.0	13.6	14.0		25.8	20.1			36.9	
Level of Service	C	C	C	B	B		C	C			D	
Approach Delay (s)		22.9			14.0			23.1			36.9	
Approach LOS		C			B			C			D	
Intersection Summary												
HCM 2000 Control Delay			20.9			HCM 2000 Level of Service			C			
HCM 2000 Volume to Capacity ratio			0.55									
Actuated Cycle Length (s)			72.2			Sum of lost time (s)			23.0			
Intersection Capacity Utilization			56.6%			ICU Level of Service			B			
Analysis Period (min)			15									
c Critical Lane Group												

Intersection

Int Delay, s/veh 0

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	1	649	424	1	1	1
Future Vol, veh/h	1	649	424	1	1	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	88	88	92	92	69	69
Heavy Vehicles, %	0	0	0	0	0	0
Mvmt Flow	1	738	461	1	1	1

Major/Minor	Major1	Major2	Minor2
Conflicting Flow All	462	0	0 1202 462
Stage 1	-	-	- 462 -
Stage 2	-	-	- 740 -
Critical Hdwy	4.1	-	- 6.4 6.2
Critical Hdwy Stg 1	-	-	- 5.4 -
Critical Hdwy Stg 2	-	-	- 5.4 -
Follow-up Hdwy	2.2	-	- 3.5 3.3
Pot Cap-1 Maneuver	1110	-	- 206 604
Stage 1	-	-	- 638 -
Stage 2	-	-	- 475 -
Platoon blocked, %	-	-	-
Mov Cap-1 Maneuver	1110	-	- 206 604
Mov Cap-2 Maneuver	-	-	- 206 -
Stage 1	-	-	- 637 -
Stage 2	-	-	- 475 -

Approach	EB	WB	SB
HCM Control Delay, s	0	0	16.8
HCM LOS			C

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1
Capacity (veh/h)	1110	-	-	-	307
HCM Lane V/C Ratio	0.001	-	-	-	0.009
HCM Control Delay (s)	8.2	0	-	-	16.8
HCM Lane LOS	A	A	-	-	C
HCM 95th %tile Q(veh)	0	-	-	-	0

Intersection

Int Delay, s/veh 0.7

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑	↑	↑	↑			↑			↑	
Traffic Vol, veh/h	0	651	4	8	421	0	4	0	20	0	0	0
Future Vol, veh/h	0	651	4	8	421	0	4	0	20	0	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	320	500	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	56	56	56	50	50	50
Heavy Vehicles, %	0	0	0	0	0	0	0	0	0	0	0	0
Mvmt Flow	0	723	4	9	468	0	7	0	36	0	0	0

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	-	0	0	727	0	0	1209	1209	723	1229	1213	468
Stage 1	-	-	-	-	-	-	723	723	-	486	486	-
Stage 2	-	-	-	-	-	-	486	486	-	743	727	-
Critical Hdwy	-	-	-	4.1	-	-	7.1	6.5	6.2	7.1	6.5	6.2
Critical Hdwy Stg 1	-	-	-	-	-	-	6.1	5.5	-	6.1	5.5	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.1	5.5	-	6.1	5.5	-
Follow-up Hdwy	-	-	-	2.2	-	-	3.5	4	3.3	3.5	4	3.3
Pot Cap-1 Maneuver	0	-	-	886	-	0	161	184	430	156	183	599
Stage 1	0	-	-	-	-	0	421	434	-	566	554	-
Stage 2	0	-	-	-	-	0	566	554	-	410	432	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	886	-	-	160	182	430	142	181	599
Mov Cap-2 Maneuver	-	-	-	-	-	-	160	182	-	142	181	-
Stage 1	-	-	-	-	-	-	421	434	-	566	548	-
Stage 2	-	-	-	-	-	-	560	548	-	376	432	-

Approach	EB	WB	NB	SB
HCM Control Delay, s	0	0.2	17.3	0
HCM LOS			C	A

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	SBLn1
Capacity (veh/h)	336	-	-	886	-	-
HCM Lane V/C Ratio	0.128	-	-	0.01	-	-
HCM Control Delay (s)	17.3	-	-	9.1	-	0
HCM Lane LOS	C	-	-	A	-	A
HCM 95th %tile Q(veh)	0.4	-	-	0	-	-

Intersection

Int Delay, s/veh 0.3

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	3	660	450	3	9	1
Future Vol, veh/h	3	660	450	3	9	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	90	90	89	89	73	73
Heavy Vehicles, %	0	0	0	0	0	0
Mvmt Flow	3	733	506	3	12	1

Major/Minor	Major1	Major2	Minor2
Conflicting Flow All	509	0	0 1247 508
Stage 1	-	-	- 508 -
Stage 2	-	-	- 739 -
Critical Hdwy	4.1	-	- 6.4 6.2
Critical Hdwy Stg 1	-	-	- 5.4 -
Critical Hdwy Stg 2	-	-	- 5.4 -
Follow-up Hdwy	2.2	-	- 3.5 3.3
Pot Cap-1 Maneuver	1066	-	- 193 569
Stage 1	-	-	- 608 -
Stage 2	-	-	- 476 -
Platoon blocked, %	-	-	-
Mov Cap-1 Maneuver	1066	-	- 192 569
Mov Cap-2 Maneuver	-	-	- 192 -
Stage 1	-	-	- 605 -
Stage 2	-	-	- 476 -

Approach	EB	WB	SB
HCM Control Delay, s	0	0	23.7
HCM LOS			C

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1
Capacity (veh/h)	1066	-	-	-	206
HCM Lane V/C Ratio	0.003	-	-	-	0.066
HCM Control Delay (s)	8.4	0	-	-	23.7
HCM Lane LOS	A	A	-	-	C
HCM 95th %tile Q(veh)	0	-	-	-	0.2

HCM Signalized Intersection Capacity Analysis

1: US 36/Highland Dr & SH 66

2050 Future Background - AM
08/07/2023

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	3	427	415	278	494	1	268	1	93	0	1	3
Future Volume (vph)	3	427	415	278	494	1	268	1	93	0	1	3
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	6.0	6.0	6.0	5.0	6.0		6.0	6.0			6.0	
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95		0.95	0.95			1.00	
Frt	1.00	1.00	0.85	1.00	1.00		1.00	0.92			0.90	
Flt Protected	0.95	1.00	1.00	0.95	1.00		0.95	0.98			1.00	
Satd. Flow (prot)	1805	3610	1615	1805	3609		1715	1624			1713	
Flt Permitted	0.46	1.00	1.00	0.33	1.00		0.95	0.98			1.00	
Satd. Flow (perm)	872	3610	1615	629	3609		1715	1624			1713	
Peak-hour factor, PHF	0.87	0.87	0.87	0.95	0.95	0.95	0.91	0.91	0.91	0.38	0.38	0.38
Adj. Flow (vph)	3	491	477	293	520	1	295	1	102	0	3	8
RTOR Reduction (vph)	0	0	244	0	0	0	0	41	0	0	8	0
Lane Group Flow (vph)	3	491	233	293	521	0	206	151	0	0	3	0
Heavy Vehicles (%)	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%
Turn Type	Perm	NA	Perm	pm+pt	NA		Split	NA			NA	
Protected Phases		2		1	6		4	4		8	8	
Permitted Phases	2		2	6								
Actuated Green, G (s)	20.2	20.2	20.2	36.7	36.7		15.5	15.5			1.1	
Effective Green, g (s)	20.2	20.2	20.2	36.7	36.7		15.5	15.5			1.1	
Actuated g/C Ratio	0.28	0.28	0.28	0.51	0.51		0.22	0.22			0.02	
Clearance Time (s)	6.0	6.0	6.0	5.0	6.0		6.0	6.0			6.0	
Vehicle Extension (s)	4.0	4.0	4.0	3.0	4.0		4.0	4.0			4.0	
Lane Grp Cap (vph)	247	1022	457	513	1857		372	353			26	
v/s Ratio Prot		0.14		c0.09	0.14		c0.12	0.09			c0.00	
v/s Ratio Perm	0.00		0.14	c0.20								
v/c Ratio	0.01	0.48	0.51	0.57	0.28		0.55	0.43			0.12	
Uniform Delay, d1	18.4	21.2	21.4	10.6	9.8		24.8	24.1			34.6	
Progression Factor	1.00	1.00	1.00	1.00	1.00		1.00	1.00			1.00	
Incremental Delay, d2	0.0	0.5	1.2	1.5	0.1		2.2	1.1			2.8	
Delay (s)	18.4	21.7	22.6	12.2	9.9		27.0	25.2			37.4	
Level of Service	B	C	C	B	A		C	C			D	
Approach Delay (s)		22.1			10.7			26.2			37.4	
Approach LOS		C			B			C			D	
Intersection Summary												
HCM 2000 Control Delay			18.7			HCM 2000 Level of Service			B			
HCM 2000 Volume to Capacity ratio			0.59									
Actuated Cycle Length (s)			71.3			Sum of lost time (s)			23.0			
Intersection Capacity Utilization			59.4%			ICU Level of Service			B			
Analysis Period (min)			15									
c Critical Lane Group												

Intersection

Int Delay, s/veh 0.3

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	0	529	749	0	3	4
Future Vol, veh/h	0	529	749	0	3	4
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	91	91	92	92	31	31
Heavy Vehicles, %	0	0	0	0	0	0
Mvmt Flow	0	581	814	0	10	13

Major/Minor	Major1	Major2	Minor2
Conflicting Flow All	814	0	0 1395 814
Stage 1	-	-	- 814 -
Stage 2	-	-	- 581 -
Critical Hdwy	4.1	-	- 6.4 6.2
Critical Hdwy Stg 1	-	-	- 5.4 -
Critical Hdwy Stg 2	-	-	- 5.4 -
Follow-up Hdwy	2.2	-	- 3.5 3.3
Pot Cap-1 Maneuver	822	-	- 157 381
Stage 1	-	-	- 439 -
Stage 2	-	-	- 563 -
Platoon blocked, %	-	-	-
Mov Cap-1 Maneuver	822	-	- 157 381
Mov Cap-2 Maneuver	-	-	- 157 -
Stage 1	-	-	- 439 -
Stage 2	-	-	- 563 -

Approach	EB	WB	SB
HCM Control Delay, s	0	0	21.9
HCM LOS			C

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1
Capacity (veh/h)	822	-	-	-	236
HCM Lane V/C Ratio	-	-	-	-	0.096
HCM Control Delay (s)	0	-	-	-	21.9
HCM Lane LOS	A	-	-	-	C
HCM 95th %tile Q(veh)	0	-	-	-	0.3

Intersection

Int Delay, s/veh 0.7

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑	↑	↑	↑			↑			↑	
Traffic Vol, veh/h	0	531	6	31	718	0	4	0	28	0	0	0
Future Vol, veh/h	0	531	6	31	718	0	4	0	28	0	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	320	500	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	72	72	72	92	92	92
Heavy Vehicles, %	0	0	0	0	0	0	0	0	0	0	0	0
Mvmt Flow	0	590	7	34	798	0	6	0	39	0	0	0

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	-	0	0	597	0	0	1456	1456	590	1479	1463	798
Stage 1	-	-	-	-	-	-	590	590	-	866	866	-
Stage 2	-	-	-	-	-	-	866	866	-	613	597	-
Critical Hdwy	-	-	-	4.1	-	-	7.1	6.5	6.2	7.1	6.5	6.2
Critical Hdwy Stg 1	-	-	-	-	-	-	6.1	5.5	-	6.1	5.5	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.1	5.5	-	6.1	5.5	-
Follow-up Hdwy	-	-	-	2.2	-	-	3.5	4	3.3	3.5	4	3.3
Pot Cap-1 Maneuver	0	-	-	989	-	0	109	131	511	105	130	389
Stage 1	0	-	-	-	-	0	497	498	-	351	373	-
Stage 2	0	-	-	-	-	0	351	373	-	483	495	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	989	-	-	106	127	511	95	126	389
Mov Cap-2 Maneuver	-	-	-	-	-	-	106	127	-	95	126	-
Stage 1	-	-	-	-	-	-	497	498	-	351	360	-
Stage 2	-	-	-	-	-	-	339	360	-	446	495	-

Approach	EB	WB	NB	SB
HCM Control Delay, s	0	0.4	16.9	0
HCM LOS			C	A

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	SBLn1
Capacity (veh/h)	346	-	-	989	-	-
HCM Lane V/C Ratio	0.128	-	-	0.035	-	-
HCM Control Delay (s)	16.9	-	-	8.8	-	0
HCM Lane LOS	C	-	-	A	-	A
HCM 95th %tile Q(veh)	0.4	-	-	0.1	-	-

Intersection

Int Delay, s/veh 0.5

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	9	572	733	32	12	7
Future Vol, veh/h	9	572	733	32	12	7
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	91	91	89	89	81	81
Heavy Vehicles, %	0	0	0	0	0	0
Mvmt Flow	10	629	824	36	15	9

Major/Minor	Major1	Major2	Minor2
Conflicting Flow All	860	0	0 1491 842
Stage 1	-	-	- 842 -
Stage 2	-	-	- 649 -
Critical Hdwy	4.1	-	- 6.4 6.2
Critical Hdwy Stg 1	-	-	- 5.4 -
Critical Hdwy Stg 2	-	-	- 5.4 -
Follow-up Hdwy	2.2	-	- 3.5 3.3
Pot Cap-1 Maneuver	790	-	- 138 367
Stage 1	-	-	- 426 -
Stage 2	-	-	- 524 -
Platoon blocked, %	-	-	-
Mov Cap-1 Maneuver	790	-	- 135 367
Mov Cap-2 Maneuver	-	-	- 135 -
Stage 1	-	-	- 418 -
Stage 2	-	-	- 524 -

Approach	EB	WB	SB
HCM Control Delay, s	0.1	0	28.6
HCM LOS			D

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1
Capacity (veh/h)	790	-	-	-	176
HCM Lane V/C Ratio	0.013	-	-	-	0.133
HCM Control Delay (s)	9.6	0	-	-	28.6
HCM Lane LOS	A	A	-	-	D
HCM 95th %tile Q(veh)	0	-	-	-	0.5

HCM Signalized Intersection Capacity Analysis

1: US 36/Highland Dr & SH 66

2050 Future Background - PM
08/07/2023

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	10	649	367	97	555	1	514	7	343	6	4	4
Future Volume (vph)	10	649	367	97	555	1	514	7	343	6	4	4
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	6.0	6.0	6.0	5.0	6.0		6.0	6.0			6.0	
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95		0.95	0.95			1.00	
Frt	1.00	1.00	0.85	1.00	1.00		1.00	0.88			0.96	
Flt Protected	0.95	1.00	1.00	0.95	1.00		0.95	0.99			0.98	
Satd. Flow (prot)	1805	3610	1615	1805	3609		1715	1568			1788	
Flt Permitted	0.43	1.00	1.00	0.18	1.00		0.95	0.99			0.98	
Satd. Flow (perm)	809	3610	1615	346	3609		1715	1568			1788	
Peak-hour factor, PHF	0.91	0.91	0.91	0.93	0.93	0.93	0.85	0.85	0.85	0.50	0.50	0.50
Adj. Flow (vph)	11	713	403	104	597	1	605	8	404	12	8	8
RTOR Reduction (vph)	0	0	141	0	0	0	0	152	0	0	8	0
Lane Group Flow (vph)	11	713	262	104	598	0	532	333	0	0	20	0
Heavy Vehicles (%)	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%
Turn Type	Perm	NA	Perm	pm+pt	NA		Split	NA		Split	NA	
Protected Phases		2		1	6		4	4		8	8	
Permitted Phases	2		2	6								
Actuated Green, G (s)	26.4	26.4	26.4	38.5	38.5		31.3	31.3			4.5	
Effective Green, g (s)	26.4	26.4	26.4	38.5	38.5		31.3	31.3			4.5	
Actuated g/C Ratio	0.29	0.29	0.29	0.42	0.42		0.34	0.34			0.05	
Clearance Time (s)	6.0	6.0	6.0	5.0	6.0		6.0	6.0			6.0	
Vehicle Extension (s)	4.0	4.0	4.0	3.0	4.0		4.0	4.0			4.0	
Lane Grp Cap (vph)	231	1032	461	256	1505		581	531			87	
v/s Ratio Prot		c0.20		0.03	c0.17		c0.31	0.21			c0.01	
v/s Ratio Perm	0.01		0.16	0.14								
v/c Ratio	0.05	0.69	0.57	0.41	0.40		0.92	0.63			0.23	
Uniform Delay, d1	23.9	29.3	28.1	18.3	18.8		29.2	25.6			42.2	
Progression Factor	1.00	1.00	1.00	1.00	1.00		1.00	1.00			1.00	
Incremental Delay, d2	0.1	2.2	1.9	1.1	0.2		19.4	2.6			1.9	
Delay (s)	24.0	31.5	30.0	19.4	19.0		48.7	28.2			44.1	
Level of Service	C	C	C	B	B		D	C			D	
Approach Delay (s)		30.9			19.1			38.9			44.1	
Approach LOS		C			B			D			D	
Intersection Summary												
HCM 2000 Control Delay			31.0			HCM 2000 Level of Service			C			
HCM 2000 Volume to Capacity ratio			0.75									
Actuated Cycle Length (s)			92.3			Sum of lost time (s)			23.0			
Intersection Capacity Utilization			70.4%			ICU Level of Service			C			
Analysis Period (min)			15									
c Critical Lane Group												

Intersection

Int Delay, s/veh 0

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	1	983	641	1	1	1
Future Vol, veh/h	1	983	641	1	1	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	88	88	92	92	69	69
Heavy Vehicles, %	0	0	0	0	0	0
Mvmt Flow	1	1117	697	1	1	1

Major/Minor	Major1	Major2	Minor2
Conflicting Flow All	698	0	0 1817 698
Stage 1	-	-	- 698 -
Stage 2	-	-	- 1119 -
Critical Hdwy	4.1	-	- 6.4 6.2
Critical Hdwy Stg 1	-	-	- 5.4 -
Critical Hdwy Stg 2	-	-	- 5.4 -
Follow-up Hdwy	2.2	-	- 3.5 3.3
Pot Cap-1 Maneuver	908	-	- 87 444
Stage 1	-	-	- 497 -
Stage 2	-	-	- 315 -
Platoon blocked, %	-	-	-
Mov Cap-1 Maneuver	908	-	- 87 444
Mov Cap-2 Maneuver	-	-	- 87 -
Stage 1	-	-	- 496 -
Stage 2	-	-	- 315 -

Approach	EB	WB	SB
HCM Control Delay, s	0	0	30.3
HCM LOS			D

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1
Capacity (veh/h)	908	-	-	-	145
HCM Lane V/C Ratio	0.001	-	-	-	0.02
HCM Control Delay (s)	9	0	-	-	30.3
HCM Lane LOS	A	A	-	-	D
HCM 95th %tile Q(veh)	0	-	-	-	0.1

Intersection

Int Delay, s/veh 0.8

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑	↑	↑	↑			↑			↑	
Traffic Vol, veh/h	0	988	4	8	639	0	4	0	20	0	0	0
Future Vol, veh/h	0	988	4	8	639	0	4	0	20	0	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	320	500	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	56	56	56	50	50	50
Heavy Vehicles, %	0	0	0	0	0	0	0	0	0	0	0	0
Mvmt Flow	0	1098	4	9	710	0	7	0	36	0	0	0

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	-	0	0	1102	0	0	1826	1826	1098	1846	1830	710
Stage 1	-	-	-	-	-	-	1098	1098	-	728	728	-
Stage 2	-	-	-	-	-	-	728	728	-	1118	1102	-
Critical Hdwy	-	-	-	4.1	-	-	7.1	6.5	6.2	7.1	6.5	6.2
Critical Hdwy Stg 1	-	-	-	-	-	-	6.1	5.5	-	6.1	5.5	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.1	5.5	-	6.1	5.5	-
Follow-up Hdwy	-	-	-	2.2	-	-	3.5	4	3.3	3.5	4	3.3
Pot Cap-1 Maneuver	0	-	-	641	-	0	60	78	261	58	77	437
Stage 1	0	-	-	-	-	0	260	291	-	418	432	-
Stage 2	0	-	-	-	-	0	418	432	-	254	290	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	641	-	-	59	77	261	50	76	437
Mov Cap-2 Maneuver	-	-	-	-	-	-	59	77	-	50	76	-
Stage 1	-	-	-	-	-	-	260	291	-	418	426	-
Stage 2	-	-	-	-	-	-	412	426	-	219	290	-

Approach	EB	WB	NB	SB
HCM Control Delay, s	0	0.1	34.1	0
HCM LOS			D	A

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	SBLn1
Capacity (veh/h)	166	-	-	641	-	-
HCM Lane V/C Ratio	0.258	-	-	0.014	-	-
HCM Control Delay (s)	34.1	-	-	10.7	-	0
HCM Lane LOS	D	-	-	B	-	A
HCM 95th %tile Q(veh)	1	-	-	0	-	-

Intersection

Int Delay, s/veh 0.6

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	4	991	678	4	13	1
Future Vol, veh/h	4	991	678	4	13	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	90	90	89	89	73	73
Heavy Vehicles, %	0	0	0	0	0	0
Mvmt Flow	4	1101	762	4	18	1

Major/Minor	Major1	Major2	Minor2
Conflicting Flow All	766	0	0 1873 764
Stage 1	-	-	- 764 -
Stage 2	-	-	- 1109 -
Critical Hdwy	4.1	-	- 6.4 6.2
Critical Hdwy Stg 1	-	-	- 5.4 -
Critical Hdwy Stg 2	-	-	- 5.4 -
Follow-up Hdwy	2.2	-	- 3.5 3.3
Pot Cap-1 Maneuver	856	-	- 80 407
Stage 1	-	-	- 463 -
Stage 2	-	-	- 318 -
Platoon blocked, %	-	-	-
Mov Cap-1 Maneuver	856	-	- 79 407
Mov Cap-2 Maneuver	-	-	- 79 -
Stage 1	-	-	- 457 -
Stage 2	-	-	- 318 -

Approach	EB	WB	SB
HCM Control Delay, s	0	0	60.1
HCM LOS			F

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1
Capacity (veh/h)	856	-	-	-	84
HCM Lane V/C Ratio	0.005	-	-	-	0.228
HCM Control Delay (s)	9.2	0	-	-	60.1
HCM Lane LOS	A	A	-	-	F
HCM 95th %tile Q(veh)	0	-	-	-	0.8

HCM Signalized Intersection Capacity Analysis

1: US 36/Highland Dr & SH 66

2050 Future Total - AM
08/07/2023

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	3	427	415	283	494	1	268	1	100	0	1	3
Future Volume (vph)	3	427	415	283	494	1	268	1	100	0	1	3
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	6.0	6.0	6.0	5.0	6.0		6.0	6.0			6.0	
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95		0.95	0.95			1.00	
Frt	1.00	1.00	0.85	1.00	1.00		1.00	0.92			0.90	
Flt Protected	0.95	1.00	1.00	0.95	1.00		0.95	0.98			1.00	
Satd. Flow (prot)	1805	3610	1615	1805	3609		1715	1618			1713	
Flt Permitted	0.46	1.00	1.00	0.33	1.00		0.95	0.98			1.00	
Satd. Flow (perm)	872	3610	1615	628	3609		1715	1618			1713	
Peak-hour factor, PHF	0.87	0.87	0.87	0.95	0.95	0.95	0.91	0.91	0.91	0.38	0.38	0.38
Adj. Flow (vph)	3	491	477	298	520	1	295	1	110	0	3	8
RTOR Reduction (vph)	0	0	244	0	0	0	0	45	0	0	8	0
Lane Group Flow (vph)	3	491	233	298	521	0	209	152	0	0	3	0
Heavy Vehicles (%)	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%
Turn Type	Perm	NA	Perm	pm+pt	NA		Split	NA			NA	
Protected Phases		2		1	6		4	4		8	8	
Permitted Phases	2		2	6								
Actuated Green, G (s)	20.3	20.3	20.3	36.9	36.9		15.7	15.7			1.1	
Effective Green, g (s)	20.3	20.3	20.3	36.9	36.9		15.7	15.7			1.1	
Actuated g/C Ratio	0.28	0.28	0.28	0.51	0.51		0.22	0.22			0.02	
Clearance Time (s)	6.0	6.0	6.0	5.0	6.0		6.0	6.0			6.0	
Vehicle Extension (s)	4.0	4.0	4.0	3.0	4.0		4.0	4.0			4.0	
Lane Grp Cap (vph)	246	1022	457	513	1857		375	354			26	
v/s Ratio Prot		0.14		c0.09	0.14		c0.12	0.09			c0.00	
v/s Ratio Perm	0.00		0.14	c0.20								
v/c Ratio	0.01	0.48	0.51	0.58	0.28		0.56	0.43			0.12	
Uniform Delay, d1	18.5	21.3	21.5	10.7	9.9		24.9	24.1			34.8	
Progression Factor	1.00	1.00	1.00	1.00	1.00		1.00	1.00			1.00	
Incremental Delay, d2	0.0	0.5	1.2	1.7	0.1		2.2	1.1			2.8	
Delay (s)	18.5	21.8	22.7	12.4	10.0		27.1	25.3			37.6	
Level of Service	B	C	C	B	A		C	C			D	
Approach Delay (s)		22.3			10.9			26.2			37.6	
Approach LOS		C			B			C			D	
Intersection Summary												
HCM 2000 Control Delay			18.8			HCM 2000 Level of Service			B			
HCM 2000 Volume to Capacity ratio			0.60									
Actuated Cycle Length (s)			71.7			Sum of lost time (s)			23.0			
Intersection Capacity Utilization			59.7%			ICU Level of Service			B			
Analysis Period (min)			15									
c Critical Lane Group												

Intersection

Int Delay, s/veh 0.3

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	0	533	754	0	3	4
Future Vol, veh/h	0	533	754	0	3	4
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	91	91	92	92	31	31
Heavy Vehicles, %	0	0	0	0	0	0
Mvmt Flow	0	586	820	0	10	13

Major/Minor	Major1	Major2	Minor2
Conflicting Flow All	820	0	0 1406 820
Stage 1	-	-	- 820 -
Stage 2	-	-	- 586 -
Critical Hdwy	4.1	-	- 6.4 6.2
Critical Hdwy Stg 1	-	-	- 5.4 -
Critical Hdwy Stg 2	-	-	- 5.4 -
Follow-up Hdwy	2.2	-	- 3.5 3.3
Pot Cap-1 Maneuver	818	-	- 155 378
Stage 1	-	-	- 436 -
Stage 2	-	-	- 560 -
Platoon blocked, %	-	-	-
Mov Cap-1 Maneuver	818	-	- 155 378
Mov Cap-2 Maneuver	-	-	- 155 -
Stage 1	-	-	- 436 -
Stage 2	-	-	- 560 -

Approach	EB	WB	SB
HCM Control Delay, s	0	0	22
HCM LOS			C

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1
Capacity (veh/h)	818	-	-	-	234
HCM Lane V/C Ratio	-	-	-	-	0.096
HCM Control Delay (s)	0	-	-	-	22
HCM Lane LOS	A	-	-	-	C
HCM 95th %tile Q(veh)	0	-	-	-	0.3

Intersection

Int Delay, s/veh 1.7

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑	↑	↑	↑			↑			↑	
Traffic Vol, veh/h	0	531	13	69	718	0	9	0	56	0	0	0
Future Vol, veh/h	0	531	13	69	718	0	9	0	56	0	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	320	500	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	72	72	72	92	92	92
Heavy Vehicles, %	0	0	0	0	0	0	0	0	0	0	0	0
Mvmt Flow	0	590	14	77	798	0	13	0	78	0	0	0

Major/Minor	Major1			Major2			Minor1			Minor2		
Conflicting Flow All	-	0	0	604	0	0	1542	1542	590	1588	1556	798
Stage 1	-	-	-	-	-	-	590	590	-	952	952	-
Stage 2	-	-	-	-	-	-	952	952	-	636	604	-
Critical Hdwy	-	-	-	4.1	-	-	7.1	6.5	6.2	7.1	6.5	6.2
Critical Hdwy Stg 1	-	-	-	-	-	-	6.1	5.5	-	6.1	5.5	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.1	5.5	-	6.1	5.5	-
Follow-up Hdwy	-	-	-	2.2	-	-	3.5	4	3.3	3.5	4	3.3
Pot Cap-1 Maneuver	0	-	-	984	-	0	95	116	511	88	114	389
Stage 1	0	-	-	-	-	0	497	498	-	314	341	-
Stage 2	0	-	-	-	-	0	314	341	-	469	491	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	-	984	-	-	89	107	511	70	105	389
Mov Cap-2 Maneuver	-	-	-	-	-	-	89	107	-	70	105	-
Stage 1	-	-	-	-	-	-	497	498	-	314	314	-
Stage 2	-	-	-	-	-	-	289	314	-	398	491	-

Approach	EB	WB	NB	SB
HCM Control Delay, s	0	0.8	21.5	0
HCM LOS			C	A

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	SBLn1
Capacity (veh/h)	308	-	-	984	-	-
HCM Lane V/C Ratio	0.293	-	-	0.078	-	-
HCM Control Delay (s)	21.5	-	-	9	-	0
HCM Lane LOS	C	-	-	A	-	A
HCM 95th %tile Q(veh)	1.2	-	-	0.3	-	-

Intersection

Int Delay, s/veh 0.5

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	9	600	771	32	12	7
Future Vol, veh/h	9	600	771	32	12	7
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	91	91	89	89	81	81
Heavy Vehicles, %	0	0	0	0	0	0
Mvmt Flow	10	659	866	36	15	9

Major/Minor	Major1	Major2	Minor2
Conflicting Flow All	902	0	0 1563 884
Stage 1	-	-	- 884 -
Stage 2	-	-	- 679 -
Critical Hdwy	4.1	-	- 6.4 6.2
Critical Hdwy Stg 1	-	-	- 5.4 -
Critical Hdwy Stg 2	-	-	- 5.4 -
Follow-up Hdwy	2.2	-	- 3.5 3.3
Pot Cap-1 Maneuver	762	-	- 124 347
Stage 1	-	-	- 407 -
Stage 2	-	-	- 507 -
Platoon blocked, %	-	-	-
Mov Cap-1 Maneuver	762	-	- 121 347
Mov Cap-2 Maneuver	-	-	- 121 -
Stage 1	-	-	- 398 -
Stage 2	-	-	- 507 -

Approach	EB	WB	SB
HCM Control Delay, s	0.1	0	31.5
HCM LOS			D

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1
Capacity (veh/h)	762	-	-	-	159
HCM Lane V/C Ratio	0.013	-	-	-	0.148
HCM Control Delay (s)	9.8	0	-	-	31.5
HCM Lane LOS	A	A	-	-	D
HCM 95th %tile Q(veh)	0	-	-	-	0.5

HCM Signalized Intersection Capacity Analysis

1: US 36/Highland Dr & SH 66

2050 Future Total - PM
08/07/2023

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	10	649	367	97	555	1	514	7	350	6	4	4
Future Volume (vph)	10	649	367	97	555	1	514	7	350	6	4	4
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	6.0	6.0	6.0	5.0	6.0		6.0	6.0			6.0	
Lane Util. Factor	1.00	0.95	1.00	1.00	0.95		0.95	0.95			1.00	
Frt	1.00	1.00	0.85	1.00	1.00		1.00	0.87			0.96	
Flt Protected	0.95	1.00	1.00	0.95	1.00		0.95	0.99			0.98	
Satd. Flow (prot)	1805	3610	1615	1805	3609		1715	1565			1788	
Flt Permitted	0.43	1.00	1.00	0.18	1.00		0.95	0.99			0.98	
Satd. Flow (perm)	809	3610	1615	346	3609		1715	1565			1788	
Peak-hour factor, PHF	0.91	0.91	0.91	0.93	0.93	0.93	0.85	0.85	0.85	0.50	0.50	0.50
Adj. Flow (vph)	11	713	403	104	597	1	605	8	412	12	8	8
RTOR Reduction (vph)	0	0	141	0	0	0	0	168	0	0	8	0
Lane Group Flow (vph)	11	713	262	104	598	0	538	319	0	0	20	0
Heavy Vehicles (%)	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%
Turn Type	Perm	NA	Perm	pm+pt	NA		Split	NA		Split	NA	
Protected Phases		2		1	6		4	4		8	8	
Permitted Phases	2		2	6								
Actuated Green, G (s)	26.4	26.4	26.4	38.5	38.5		31.3	31.3			4.5	
Effective Green, g (s)	26.4	26.4	26.4	38.5	38.5		31.3	31.3			4.5	
Actuated g/C Ratio	0.29	0.29	0.29	0.42	0.42		0.34	0.34			0.05	
Clearance Time (s)	6.0	6.0	6.0	5.0	6.0		6.0	6.0			6.0	
Vehicle Extension (s)	4.0	4.0	4.0	3.0	4.0		4.0	4.0			4.0	
Lane Grp Cap (vph)	231	1032	461	256	1505		581	530			87	
v/s Ratio Prot		c0.20		0.03	c0.17		c0.31	0.20			c0.01	
v/s Ratio Perm	0.01		0.16	0.14								
v/c Ratio	0.05	0.69	0.57	0.41	0.40		0.93	0.60			0.23	
Uniform Delay, d1	23.9	29.3	28.1	18.3	18.8		29.4	25.3			42.2	
Progression Factor	1.00	1.00	1.00	1.00	1.00		1.00	1.00			1.00	
Incremental Delay, d2	0.1	2.2	1.9	1.1	0.2		21.1	2.2			1.9	
Delay (s)	24.0	31.5	30.0	19.4	19.0		50.5	27.6			44.1	
Level of Service	C	C	C	B	B		D	C			D	
Approach Delay (s)		30.9			19.1			39.6			44.1	
Approach LOS		C			B			D			D	
Intersection Summary												
HCM 2000 Control Delay			31.2			HCM 2000 Level of Service			C			
HCM 2000 Volume to Capacity ratio			0.75									
Actuated Cycle Length (s)			92.3			Sum of lost time (s)			23.0			
Intersection Capacity Utilization			70.6%			ICU Level of Service			C			
Analysis Period (min)			15									
c Critical Lane Group												

Intersection

Int Delay, s/veh 0

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	1	990	641	1	1	1
Future Vol, veh/h	1	990	641	1	1	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	88	88	92	92	69	69
Heavy Vehicles, %	0	0	0	0	0	0
Mvmt Flow	1	1125	697	1	1	1

Major/Minor	Major1	Major2	Minor2
Conflicting Flow All	698	0	0 1825 698
Stage 1	-	-	- 698 -
Stage 2	-	-	- 1127 -
Critical Hdwy	4.1	-	- 6.4 6.2
Critical Hdwy Stg 1	-	-	- 5.4 -
Critical Hdwy Stg 2	-	-	- 5.4 -
Follow-up Hdwy	2.2	-	- 3.5 3.3
Pot Cap-1 Maneuver	908	-	- 86 444
Stage 1	-	-	- 497 -
Stage 2	-	-	- 312 -
Platoon blocked, %	-	-	-
Mov Cap-1 Maneuver	908	-	- 86 444
Mov Cap-2 Maneuver	-	-	- 86 -
Stage 1	-	-	- 496 -
Stage 2	-	-	- 312 -

Approach	EB	WB	SB
HCM Control Delay, s	0	0	30.5
HCM LOS			D

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1
Capacity (veh/h)	908	-	-	-	144
HCM Lane V/C Ratio	0.001	-	-	-	0.02
HCM Control Delay (s)	9	0	-	-	30.5
HCM Lane LOS	A	A	-	-	D
HCM 95th %tile Q(veh)	0	-	-	-	0.1

Intersection

Int Delay, s/veh 2.1

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑	↑	↑	↑			↑			↑	
Traffic Vol, veh/h	0	988	11	17	639	0	4	0	53	0	0	0
Future Vol, veh/h	0	988	11	17	639	0	4	0	53	0	0	0
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Free	Free	Stop	Stop	Stop	Stop	Stop	Stop
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	320	500	-	-	-	-	-	-	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	90	90	90	90	90	90	56	56	56	50	50	50
Heavy Vehicles, %	0	0	0	0	0	0	0	0	0	0	0	0
Mvmt Flow	0	1098	12	19	710	0	7	0	95	0	0	0

Major/Minor	Major1		Major2		Minor1		Minor2					
Conflicting Flow All	-	0	0	1110	0	0	1846	1846	1098	1900	1858	710
Stage 1	-	-	-	-	-	-	1098	1098	-	748	748	-
Stage 2	-	-	-	-	-	-	748	748	-	1152	1110	-
Critical Hdwy	-	-	-	4.1	-	-	7.1	6.5	6.2	7.1	6.5	6.2
Critical Hdwy Stg 1	-	-	-	-	-	-	6.1	5.5	-	6.1	5.5	-
Critical Hdwy Stg 2	-	-	-	-	-	-	6.1	5.5	-	6.1	5.5	-
Follow-up Hdwy	-	-	-	2.2	-	-	3.5	4	3.3	3.5	4	3.3
Pot Cap-1 Maneuver	0	-	-	637	-	0	58	76	261	53	74	437
Stage 1	0	-	-	-	-	0	260	291	-	408	423	-
Stage 2	0	-	-	-	-	0	408	423	-	243	287	-
Platoon blocked, %		-	-		-							
Mov Cap-1 Maneuver	-	-	-	637	-	-	57	74	261	33	72	437
Mov Cap-2 Maneuver	-	-	-	-	-	-	57	74	-	33	72	-
Stage 1	-	-	-	-	-	-	260	291	-	408	410	-
Stage 2	-	-	-	-	-	-	396	410	-	155	287	-

Approach	EB	WB	NB	SB
HCM Control Delay, s	0	0.3	37.6	0
HCM LOS			E	A

Minor Lane/Major Mvmt	NBLn1	EBT	EBR	WBL	WBT	SBLn1
Capacity (veh/h)	209	-	-	637	-	-
HCM Lane V/C Ratio	0.487	-	-	0.03	-	-
HCM Control Delay (s)	37.6	-	-	10.8	-	0
HCM Lane LOS	E	-	-	B	-	A
HCM 95th %tile Q(veh)	2.4	-	-	0.1	-	-

Intersection

Int Delay, s/veh 0.6

Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Vol, veh/h	4	1024	687	4	13	1
Future Vol, veh/h	4	1024	687	4	13	1
Conflicting Peds, #/hr	0	0	0	0	0	0
Sign Control	Free	Free	Free	Free	Stop	Stop
RT Channelized	-	None	-	None	-	None
Storage Length	-	-	-	-	0	-
Veh in Median Storage, #	-	0	0	-	0	-
Grade, %	-	0	0	-	0	-
Peak Hour Factor	90	90	89	89	73	73
Heavy Vehicles, %	0	0	0	0	0	0
Mvmt Flow	4	1138	772	4	18	1

Major/Minor	Major1	Major2	Minor2
Conflicting Flow All	776	0	0 1920 774
Stage 1	-	-	- 774 -
Stage 2	-	-	- 1146 -
Critical Hdwy	4.1	-	- 6.4 6.2
Critical Hdwy Stg 1	-	-	- 5.4 -
Critical Hdwy Stg 2	-	-	- 5.4 -
Follow-up Hdwy	2.2	-	- 3.5 3.3
Pot Cap-1 Maneuver	849	-	- 75 402
Stage 1	-	-	- 458 -
Stage 2	-	-	- 306 -
Platoon blocked, %	-	-	-
Mov Cap-1 Maneuver	849	-	- 74 402
Mov Cap-2 Maneuver	-	-	- 74 -
Stage 1	-	-	- 452 -
Stage 2	-	-	- 306 -

Approach	EB	WB	SB
HCM Control Delay, s	0	0	64.6
HCM LOS			F

Minor Lane/Major Mvmt	EBL	EBT	WBT	WBR	SBLn1
Capacity (veh/h)	849	-	-	-	79
HCM Lane V/C Ratio	0.005	-	-	-	0.243
HCM Control Delay (s)	9.3	0	-	-	64.6
HCM Lane LOS	A	A	-	-	F
HCM 95th %tile Q(veh)	0	-	-	-	0.9