


Esercizio creazione e configurazione di una rete con Cisco Packet

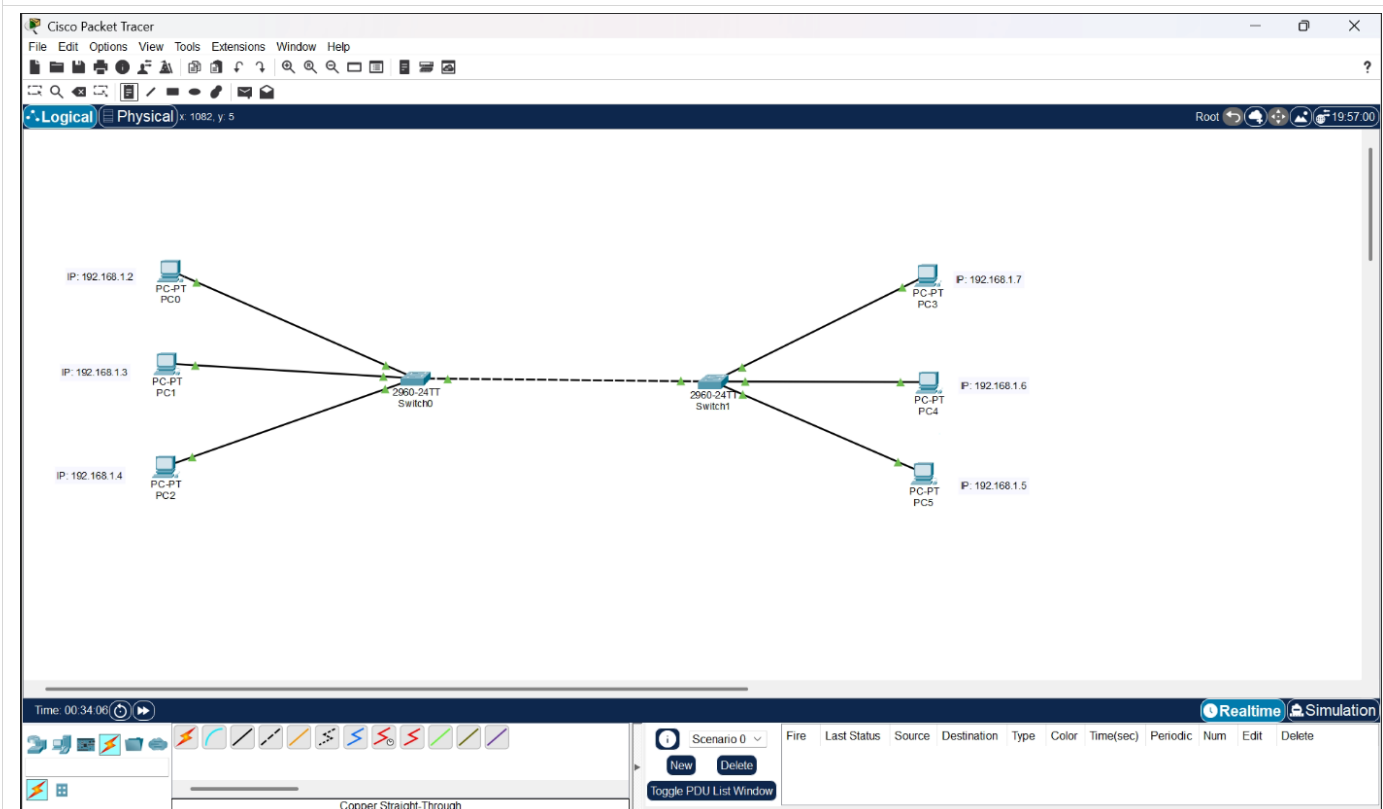


Rete composta da 6 dispositivi finali e 2 dispositivi switch Cisco Catalyst 2960

The screenshot shows the Cisco Packet Tracer interface with the 'IP Configuration' window open for PC0. The window is divided into 'IP Configuration' and 'IPv6 Configuration' sections. The 'IP Configuration' section is active, showing 'Static' IP configuration for the 'FastEthernet0' interface. The IP address is set to 192.168.1.2, the subnet mask is 255.255.255.0, and the default gateway is 0.0.0.0. The 'IPv6 Configuration' section is also visible, showing 'Static' configuration with a link local address of FE80::202:4AFF:FE82:D6D. The background shows the network topology with the two switches and six PCs. The bottom status bar shows 'Time: 01:09:50' and 'Realtime' mode.

Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
C2	PC5	ICMP	Green	0.000	N	0	(edit)	(delete)
C0	PC5	ICMP	Green	0.000	N	1	(edit)	(delete)
C1	PC3	ICMP	Yellow	0.000	N	2	(edit)	(delete)
C2	PC5	ICMP	Yellow	0.000	N	3	(edit)	(delete)

Per ogni dispositivo di fine, ho impostato in modo statico l'indirizzo IP, di tipo ipv4, nella sezione "IP Configuration" del pannello "Desktop"



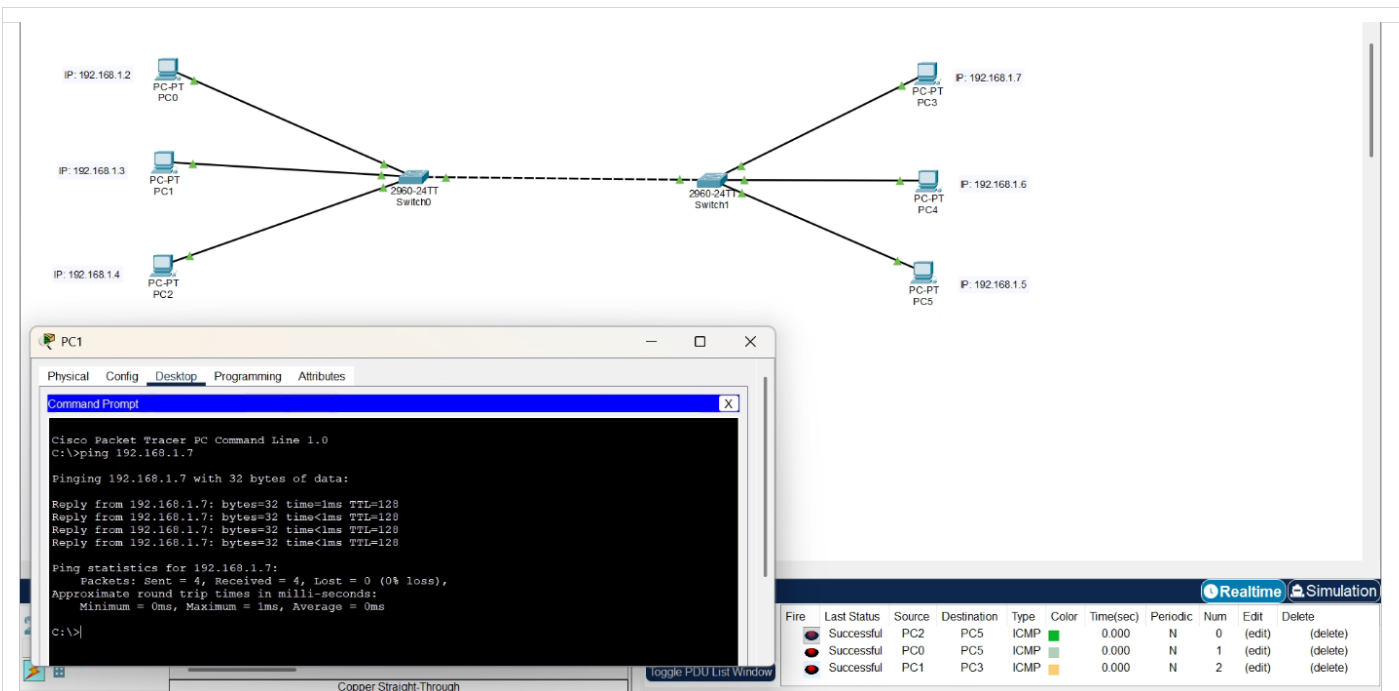

Ritorno del comando ping dal dispositivo finale PC1-192.168.1.3 al dispositivo finale PC3-192.168.1.7 (in basso a sinistra), e Simple DPU eseguiti (in basso a destra)