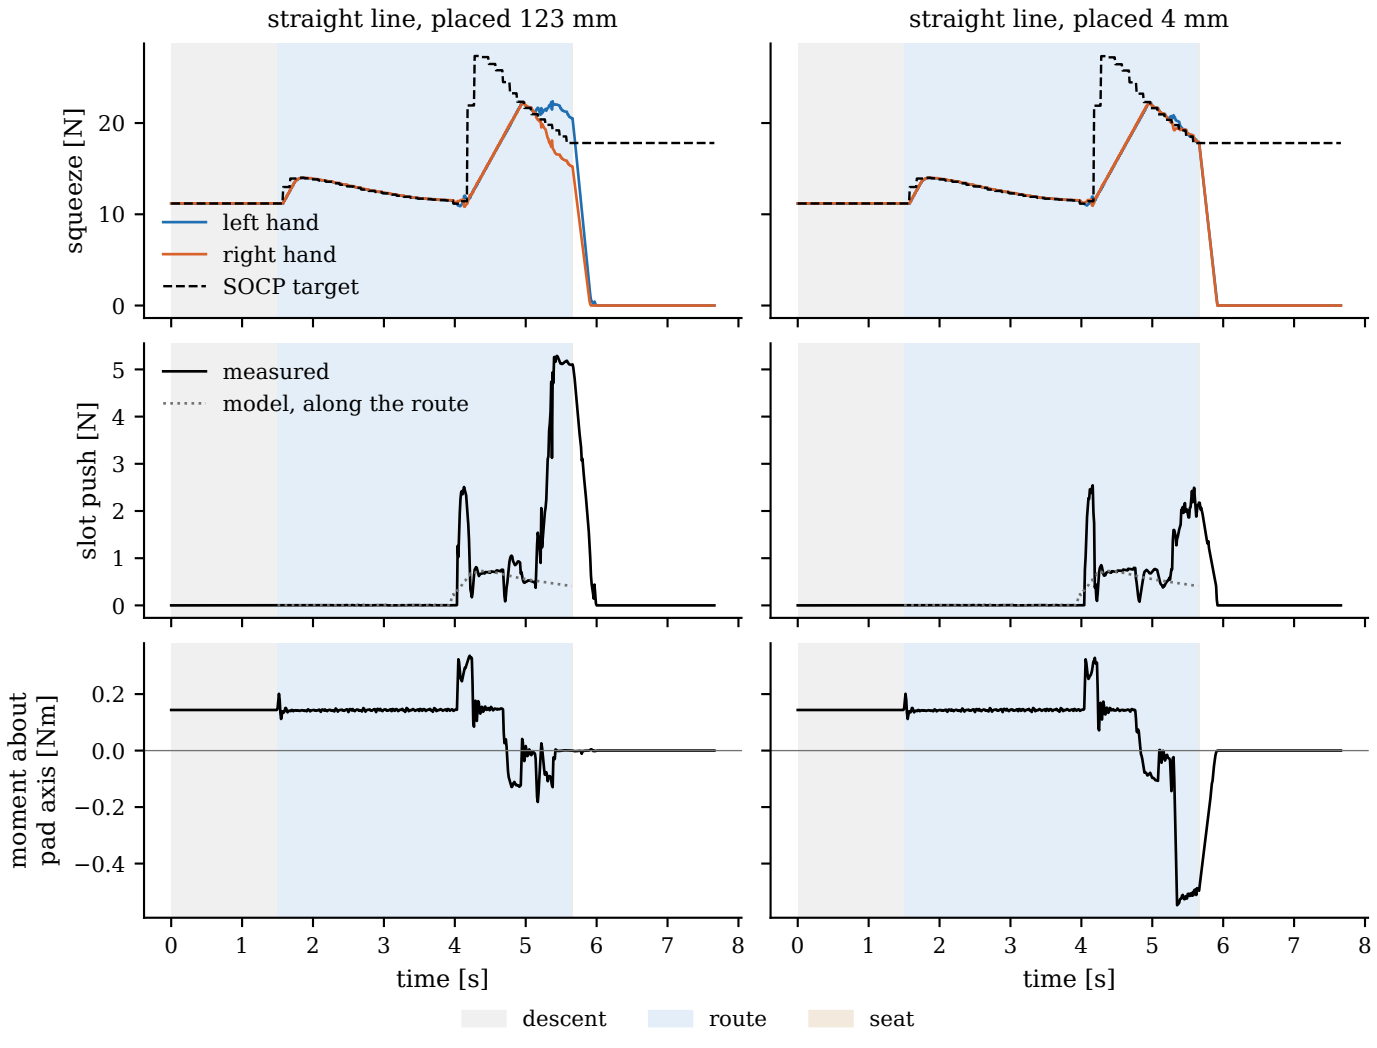

straight line, placed 123 mm
straight line, placed 4 mm
squeeze [N]
left hand
right hand
SOCP target
slot push [N]
measured
model, along the route
moment about pad axis [Nm]
time [s]
time [s]
descent
route
seat