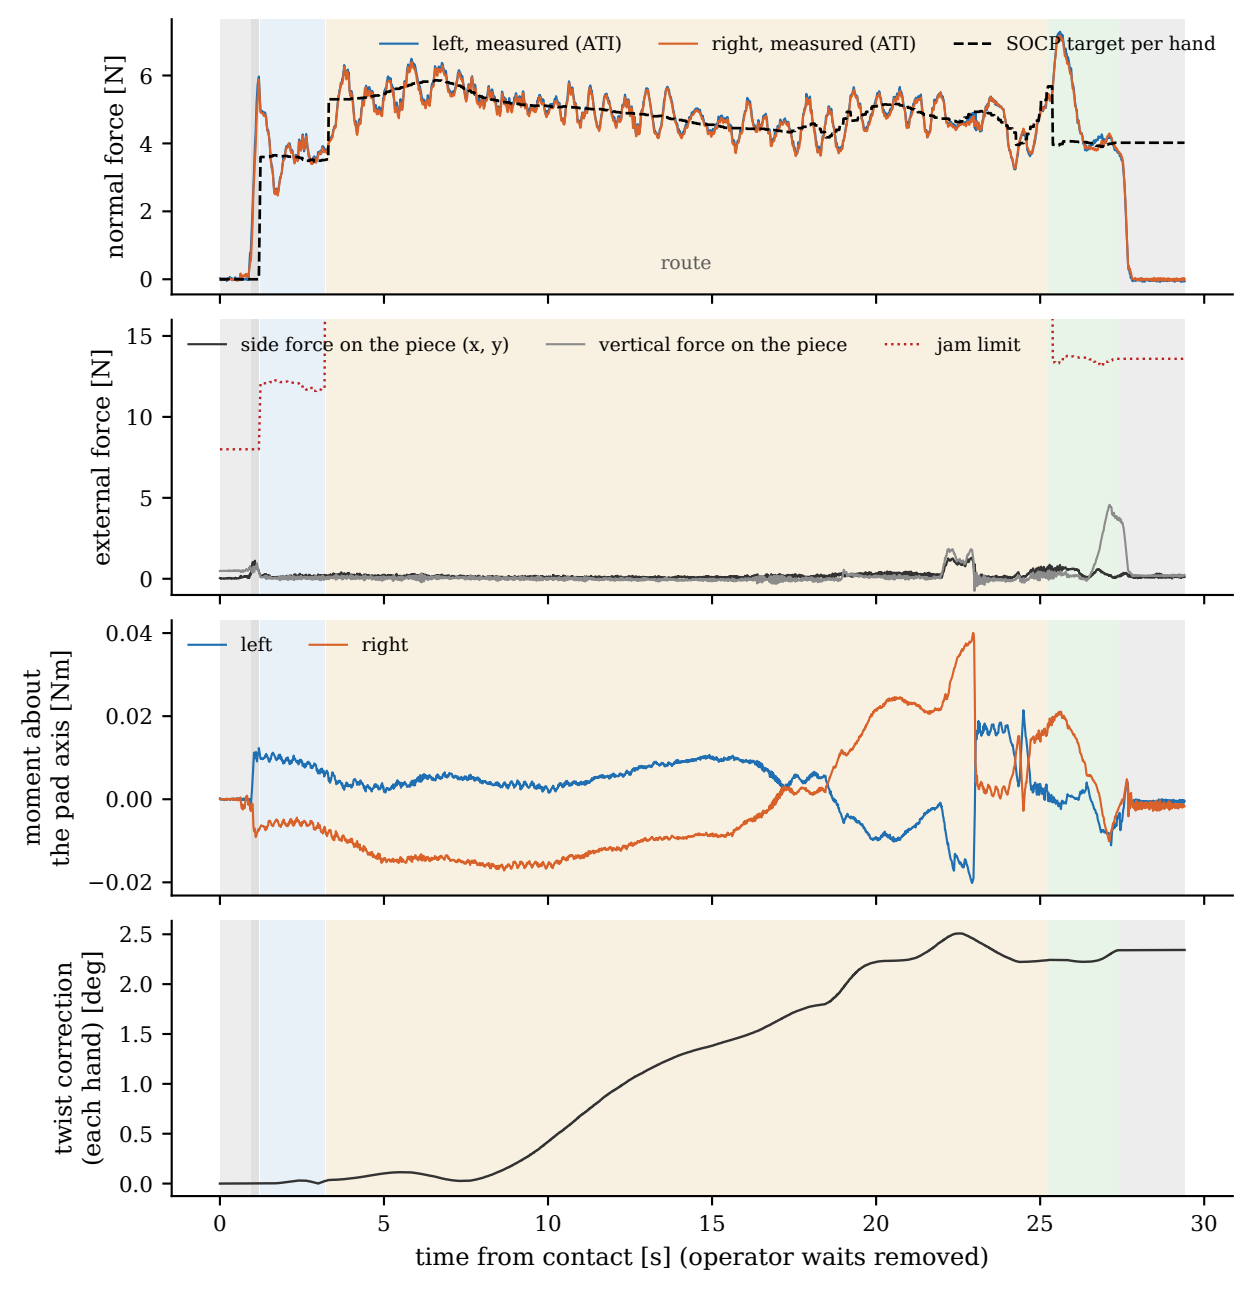

left, measured (ATI)
right, measured (ATI)
SOCP target per hand
normal force [N]
route
side force on the piece (x, y)
vertical force on the piece
jam limit
external force [N]
left
right
moment about the pad axis [Nm]
twist correction (each hand) [deg]
time from contact [s] (operator waits removed)