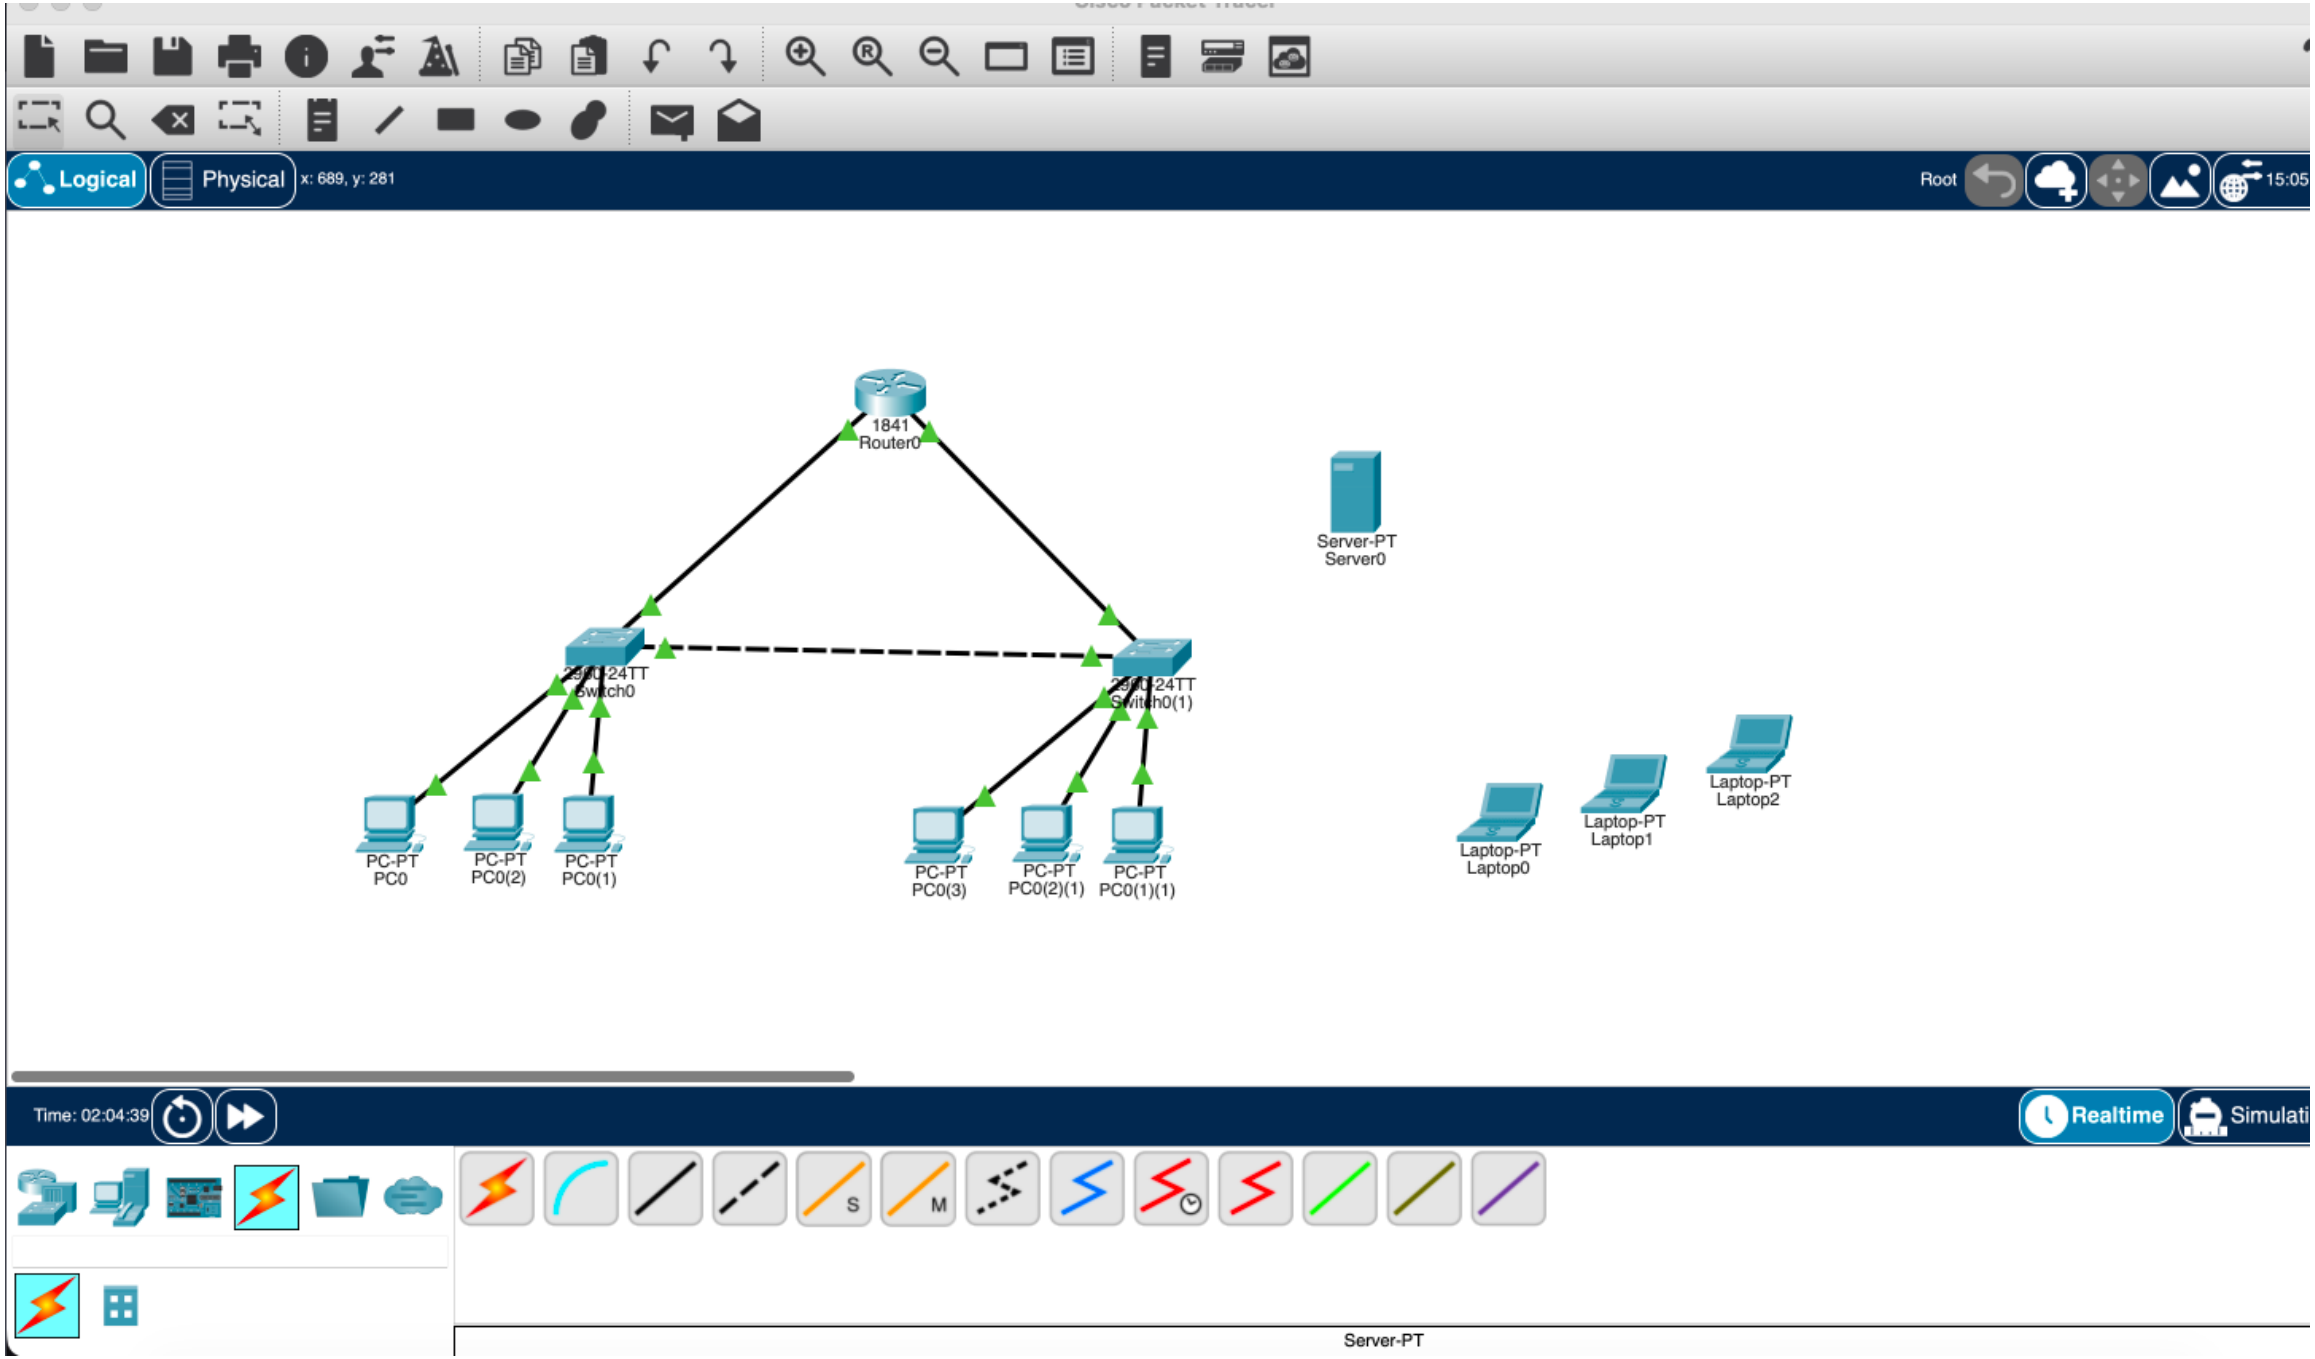
Logical
Physical
x: 689, y: 281
Root
15:05
1841
Router0
Server-PT
Server0
2960-24TT
Switch0
2960-24TT
Switch0(1)
PC-PT
PC0
PC-PT
PC0(2)
PC-PT
PC0(1)
PC-PT
PC0(3)
PC-PT
PC0(2)(1)
PC-PT
PC0(1)(1)
Laptop-PT
Laptop0
Laptop-PT
Laptop1
Laptop-PT
Laptop2
Time: 02:04:39
Realtime
Simulati
Server-PT

Cisco Packet Tracer

Logical | Physical | x: 256, y: 622

Time: 02:05:27

Realtime | Simulation

Server-PT

PC0

Physical | Config | Desktop | Programming | Attributes

IP Configuration

Interface: Ethernet0

IP Configuration

- DHCP
- Static

IPv4 Address	192.168.1.2
Subnet Mask	255.255.255.0
Default Gateway	192.168.1.1
DNS Server	8.8.8.8

IPv6 Configuration

- Automatic
- Static

IPv6 Address	/
Link Local Address	FE80::20C:CFFF:FEA6:A0EB
Default Gateway	
DNS Server	

802.1X

- Use 802.1X Security

Authentication	MD5
Username	
Password	

Top

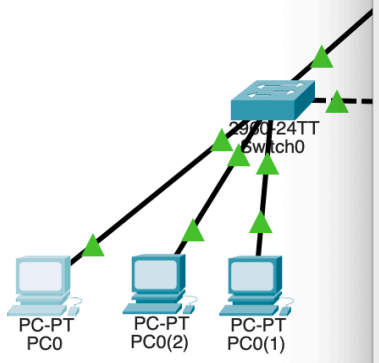

Cisco Packet Tracer

PC0

Physical | Config | Desktop | Programming | Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>



C:\>
C:\>ping 192.168.1.5

Pinging 192.168.1.5 with 32 bytes of data:

Reply from 192.168.1.5: bytes=32 time=7ms TTL=128
Reply from 192.168.1.5: bytes=32 time=22ms TTL=128
Reply from 192.168.1.5: bytes=32 time=18ms TTL=128
Reply from 192.168.1.5: bytes=32 time=6ms TTL=128

Ping statistics for 192.168.1.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 6ms, Maximum = 22ms, Average = 13ms

C:\>ping 192.168.1.7

Pinging 192.168.1.7 with 32 bytes of data:

Reply from 192.168.1.7: bytes=32 time=6ms TTL=128
Reply from 192.168.1.7: bytes=32 time=30ms TTL=128
Reply from 192.168.1.7: bytes=32 time=28ms TTL=128
Reply from 192.168.1.7: bytes=32 time=8ms TTL=128

Ping statistics for 192.168.1.7:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 6ms, Maximum = 30ms, Average = 18ms

C:\>ipconfig

Bluetooth Connection:(default port)

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.........: ::
   IPv6 Address....................: ::
   IPv4 Address....................: 0.0.0.0
   Subnet Mask.....................: 0.0.0.0
   Default Gateway.................: ::
                                     0.0.0.0

Ethernet0 Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.........: FE80::20C:CFFF:FEA6:A0EB
   IPv6 Address....................: ::
   IPv4 Address....................: 192.168.1.2
   Subnet Mask.....................: 255.255.255.0
   Default Gateway.................: ::
                                     192.168.1.1

C:\>
C:\>
C:\>
C:\>
C:\>
C:\>
```

Top

Logical | Physical | x: 217, y: 464

Root

PC-PT
PC0

Time: 02:06:28

Realtime | Simulation

Server-PT

Topologia di rete

La rete LAN simulata in Cisco Packet Tracer con indirizzo 192.168.1.0/24, 2 switch collegati tra loro e 3 PC per ciascuno.

Caratteristiche:

- Nessuna configurazione, operano in L2
- PC configurati con IP statico (no DHCP)
- SM: 255.255.255.0
- No DNS server (LAN locale senza accesso a internet, impostato comunque per convenzione 8.8.8.8)

Verifica di funzionalità:
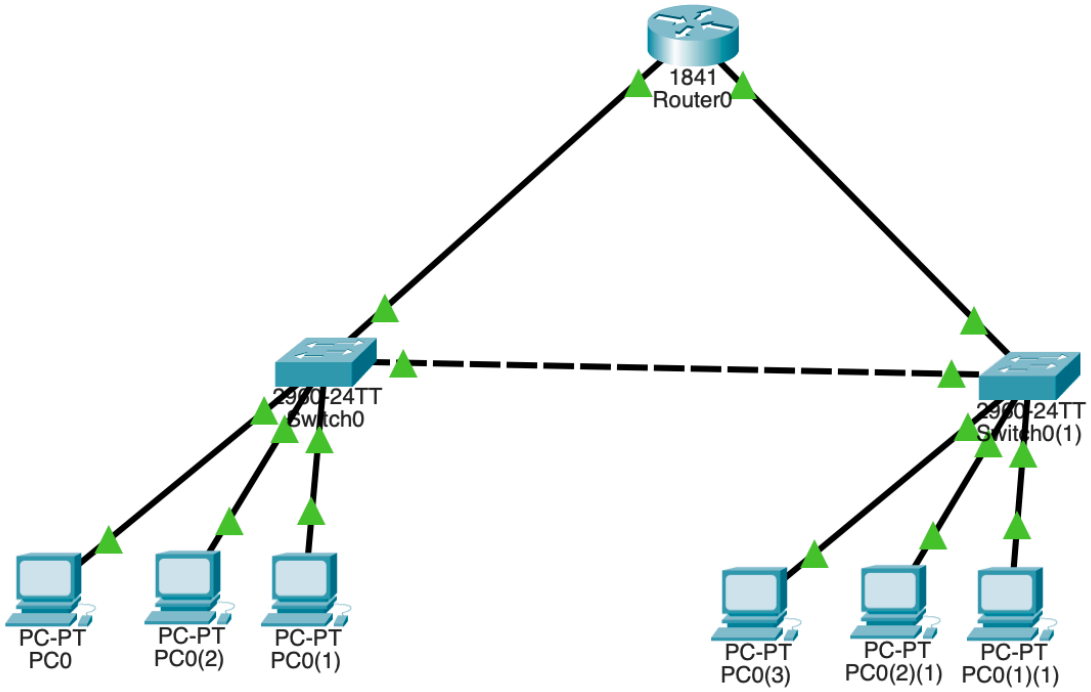
- I PC parlano tutti tra di loro all'interno della rete (test Ping)