
LS

Instruments and Lab Safety

Understand the idea. Build the method. Earn the marks.

FIG. 06 / SAFETY

Connect the hazard, exposure route and control

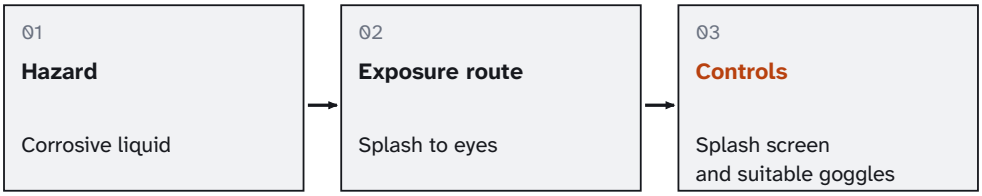

Match controls to the assessed task and the approved procedure.

Takeaway: eye protection adds a layer; first eliminate or reduce the hazard.

Document	Instruments and Lab Safety
Level / lessons	3 / 8
Edition	November 2026 / Bench Sheet
Pages	47

Start here

Begin with one lesson and a pencil. Follow the stages below, then practise without notes.

1. Read the Idea and describe it in your own words before looking at the rule.
2. Check what every symbol means and when the rule applies.
3. Cover the worked steps. Predict the next step, then compare.
4. Use the working grid to attempt Your turn. Check the answers in the lesson review section.
5. Attempt the subject tests without notes. Use the explanations to identify the exact step you missed.

Read the page at a glance

Rule

$$v = \frac{d}{t}$$

A framed rule is something to select and apply, not just memorise. Here, average speed is distance divided by elapsed time.

Your turn

Blue marks a task for you. Write a prediction or calculation before checking.

Watch out

An orange note marks a common error. Example: do not confuse distance with displacement.

Before you begin

- Have a calculator, pencil and the units used in your course.
- Review basic rearrangement and graph reading when a lesson lists them as pre-requisites.
- Use the formula sheet and symbol glossary for revision; the same letter can have different meanings in different lessons.

Use the linked contents and alphabetical topic index to find a lesson. Marking points are study guidance, not an official marking scheme.

Your study route

Start here **2**

Instruments and Lab Safety **4**

Subject map 5

01 Hazard, risk and prevention 6

02 Personal protective equipment and contamination 9

03 Exposure routes and toxic effects 12

04 Labels, SDS and chemical properties 15

05 Glassware, measurement and safe apparatus 18

06 Hoods, heating, cooling and pressure 21

07 Waste, housekeeping and emergency priorities 24

08 Biosafety and the control hierarchy 27

Lesson review and answers 31

Instruments and Lab Safety / Test A 34

Instruments and Lab Safety / Test B 37

Instruments and Lab Safety / Test A / Answers 40

Instruments and Lab Safety / Test B / Answers 42

Formula sheet 44

Symbol glossary 45


Source and coverage notes 46

Topic index **47**

Instruments and Lab Safety

FIG. 06 / SAFETY

Connect the hazard, exposure route and control

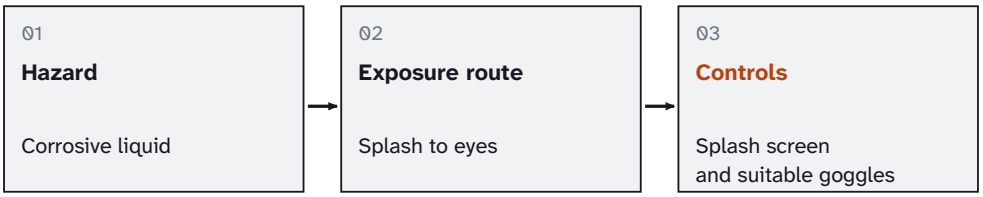

Match controls to the assessed task and the approved procedure.

Takeaway: eye protection adds a layer; first eliminate or reduce the hazard.

SCI 101 lecture chapters 1-3: accident prevention, chemical hazards, laboratory techniques, emergency principles and biosafety. This is exam study material; real laboratory work follows the current instructor procedure and chemical-specific safety information.

Subject map

SCI 101 lecture chapters 1-3: accident prevention, chemical hazards, laboratory techniques, emergency principles and biosafety. This is exam study material; real laboratory work follows the current instructor procedure and chemical-specific safety information.

Follow this reading route from foundations to applications. Each line links to its lesson; revisit the stated prerequisites whenever a step feels unfamiliar.

01 Hazard, risk and prevention p.6

02 Personal protective equipment and contamination p.9

03 Exposure routes and toxic effects p.12

04 Labels, SDS and chemical properties p.15

05 Glassware, measurement and safe apparatus p.18

06 Hoods, heating, cooling and pressure p.21

07 Waste, housekeeping and emergency priorities p.24

08 Biosafety and the control hierarchy p.27

Hazard, risk and prevention

LS / 01

- Distinguish a hazard from the risk of harm in a particular situation.
- Choose a control that interrupts the actual exposure route.

You need: Hazard means potential for harm; exposure means contact with the harmful agent.


01 Idea

A hazard is a source of possible harm. Risk depends on exposure and the chance and severity of harm. Accident prevention is shared: prepare, follow approved procedures and report unsafe conditions. A familiar chemical or routine experiment can still present hazards.

A substance hazard is its potential to cause harm; the practical risk depends on how it is used and who can be exposed. Identifying the chemical is therefore only the start. A useful assessment links the harmful property to an activity, an exposure route and a suitable control.

FIG. 06 / SAFETY

Connect the hazard, exposure route and control

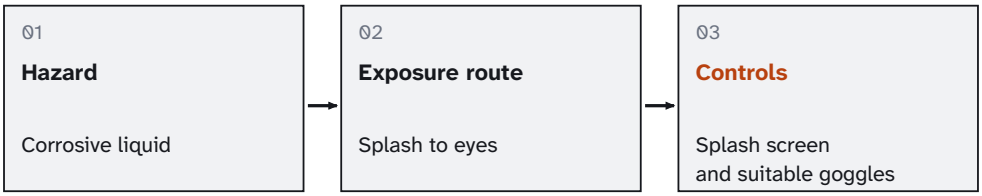

Match controls to the assessed task and the approved procedure.

Takeaway: eye protection adds a layer; first eliminate or reduce the hazard.

Figure 06. A useful safety answer connects a specific hazard to a route of exposure and suitable controls. A splash screen and appropriate goggles can limit splash exposure; they do not replace reducing or removing the hazard where possible.

- The same hazard can create different risks under different exposure conditions.
- A control is relevant only if it reduces the source, exposure likelihood or harmful consequence.

02 Rule and symbols

Rule

Good answer: hazard → exposure route → control

03 Method

1. Name the harmful property and the activity creating exposure.
2. Identify who could be exposed, by which route and under what conditions.
3. Select a control that reduces the source or interrupts the route.
4. Explain the remaining need for the approved procedure and required personal protection.

For an unfamiliar reagent, preparation means identifying hazards and the approved method before beginning work.

04 Worked example

A volatile harmful liquid on an open bench creates an inhalation hazard.

01 The example liquid is volatile and harmful, so vapour can leave an open container.

02 A person nearby may inhale that vapour; this connects the chemical hazard to an exposure route.

03 An approved fume-hood procedure controls vapour at its source when suitable for that substance and operation.

04 Goggles protect eyes from appropriate hazards but do not remove vapour from inhaled air.

Watch out

Do not write only be careful; name a concrete control.

Exam habit

For a scenario answer write a linked chain: hazard, exposure route, suitable control and reason.

05 Your turn

A student uses an unfamiliar reagent without reading its safety information. Identify the problem and two appropriate preparatory actions.

If you get stuck, uncover one hint at a time:

1. Identify what the student has not established before starting: hazards and suitable controls.
2. Choose one preparatory action that obtains reagent-specific safety information.
3. Choose another that confirms the approved procedure or required supervision. Explain how each prevents an uninformed exposure.

06 Check your understanding

Why is naming only a hazardous chemical insufficient to describe a risk scenario?

The same harmful volatile liquid is sealed in approved storage or poured openly during a task. Why can risk differ?

1. The opportunity for exposure differs
2. Its chemical identity necessarily changes
3. A sealed container makes the liquid chemically harmless

Answers and explanations: page 31.

Personal protective equipment and contamination

LS / 02

- Trace how contaminated gloves transfer material to clean surfaces.
- Select PPE for the task and remove it without spreading contamination.

You need: Contamination transfer; clean and contaminated work zones; task-specific protection.

01 Idea

Splash goggles protect against chemical splashes; ordinary spectacles do not provide equivalent coverage. Gloves must be compatible with the chemical and inspected. No glove protects indefinitely. Contaminated gloves can carry chemicals to phones, door handles and notebooks.

PPE is selected for the route and type of exposure, not simply worn as a general safety symbol. Ordinary prescription glasses leave openings around the eyes, while a coat mainly protects covered skin and clothing. Protection for a splash task must match the actual eye and body hazards specified by the method.

- A barrier cannot protect an area it does not cover adequately.
- Different materials and tasks can require different PPE, so everyday glasses are not automatically splash-rated eye protection.

02 Rule and symbols

Rule
Select PPE for the specific hazard and task

03 Method

1. Identify the contaminant and which surfaces or body areas need protection.
2. Use PPE specified for the material and task rather than assuming one glove type protects against everything.
3. Keep contaminated gloves away from phones, door handles and other clean shared items.

4. Remove and dispose of PPE according to the approved procedure, then perform required hand hygiene.

When asked whether clothing is sufficient, identify the exposed area and required protection for the particular task.

04 Worked example

A student touches a phone with contaminated gloves.

01 The student glove is already contaminated before touching the phone.

02 Contact transfers material from glove to phone, creating a new contaminated surface.

03 Later bare-hand contact can move that material to skin, food or the face.

04 Removing gloves correctly before touching clean items breaks that transfer chain; the phone may still need the approved decontamination procedure.

Watch out

More layers of unsuitable gloves do not establish chemical compatibility.

Exam habit

Explain what is transferred and to where; simply saying wear gloves does not solve a contamination scenario.

05 Your turn

Explain why ordinary prescription glasses and a lab coat alone are insufficient for a splash-risk task.

If you get stuck, uncover one hint at a time:

1. List which areas a lab coat covers and which areas remain exposed.
2. Consider whether ordinary prescription glasses provide the task-required splash protection around the eyes.

3. Explain the coverage gaps and identify the need for approved splash-rated protection and any other task-specific PPE, following the laboratory method.

06 Check your understanding

Do gloves make it acceptable to touch your face during laboratory work?

Why should glove material be selected for the chemical and task?

1. Thicker-looking gloves always remove all exposure routes
2. Different glove materials resist different chemicals differently
3. Every glove blocks every chemical equally

Answers and explanations: page 31.

Exposure routes and toxic effects

LS / 03

- Identify inhalation, ingestion, skin or eye contact and injection exposures.
- Distinguish route of exposure from the timing of a toxic effect.

You need: Contact with an agent can occur by several routes; visible vapour is not required.

01 Idea

Chemicals can enter by inhalation, ingestion, skin or eye absorption, or injection through contaminated sharps. Acute exposure is short-term; chronic exposure is repeated or long-term. Effects can be local or systemic, immediate or delayed, reversible or irreversible.

Exposure route describes how material reaches the body, not whether the person notices it. Vapour can be inhaled, while a contaminated sharp can introduce material through skin. Odour is a sensory property with limits, so absence of smell cannot establish absence of a hazardous exposure.

- Different routes require different preventive controls.
- Some hazards have little warning odour, and smell may not reliably indicate a safe concentration.

02 Rule and symbols

Rule
Dose, duration, route and substance all influence harm

03 Method

1. Read the activity and locate the point where the agent could enter or contact the body.
2. Name the route using the specific evidence in the scenario.
3. Distinguish a rapid acute effect from an effect associated with longer or repeated exposure.
4. Match prevention to the identified route and follow the material-specific procedure.

Classify the physical entry mechanism first, then explain why sensory impressions cannot replace safety information.

04 Worked example

Eating in a laboratory can lead to ingestion of contamination.

01 Eating in the laboratory can move contamination from hands or surfaces to food.

02 Swallowing that material is ingestion, even when the contaminant is not visible.

03 A contaminated needle can breach the skin and introduce material directly: this is injection exposure.

04 The absence of visible vapour does not remove either risk because neither route depends on inhalation.

Watch out

A lack of smell does not prove safety.

Exam habit

Name both the route and the evidence, for example ingestion because contaminated food is swallowed.

05 Your turn

Classify inhaling vapour and a contaminated needle puncture by exposure route. Explain why no smell does not prove no hazard.

If you get stuck, uncover one hint at a time:

1. For each event, identify how the material crosses into or contacts the body.
2. Airborne vapour enters through breathing; a contaminated puncture breaches skin directly. Name the route for each.
3. For the smell explanation, state that detectability and hazardous exposure are

different questions; refer to substance-specific safety information.

06 Check your understanding

A droplet splashes into an eye. Is the route inhalation?

A hazardous substance has no noticeable odour during use. What can be concluded?

1. There is no inhalation hazard
2. PPE and handling controls are unnecessary
3. Odour alone cannot establish safety

Answers and explanations: page 31.

Labels, SDS and chemical properties

LS / 04

- Use a label and SDS to connect chemical properties with controls.
- Distinguish corrosive and oxidizing hazards in an explanation.

You need: Chemical identity; label symbols; an SDS gives substance-specific hazard and handling information.

01 Idea

Read the identity and hazard information before use. Safety data sheets describe hazards, handling, storage, exposure controls, first aid and other substance-specific information. Flammable, oxidizing, corrosive and toxic refer to different hazards and can apply to one substance simultaneously.

One chemical can have several hazards that require separate reasoning. Flammability concerns ignition and combustion, whereas corrosivity concerns damaging contact. An answer that names one generic precaution may miss the second hazard, even when it sounds broadly cautious.

- An ignition control addresses a fire pathway but does not by itself prevent corrosive contact.
- Splash/contact controls address exposed tissues but do not make a flammable material nonflammable.

02 Rule and symbols

Rule

Identity + hazard + controls + incompatibilities

03 Method

1. Confirm the chemical identity from its label before selecting a procedure.
2. Read relevant SDS information for hazards, incompatibilities and required handling controls.
3. Explain how the named property causes harm in the scenario.

4. Use the approved storage or handling arrangement rather than inferring compatibility from appearance.

When a label carries more than one hazard, give a distinct risk-and-control link for each.

04 Worked example

A corrosive liquid can damage tissue, while an oxidizer may intensify fire even when it is not itself a fuel.

01 A corrosive liquid can damage living tissue or certain materials by contact.

02 An oxidizer can support or intensify combustion even when it is not itself the fuel.

03 The mechanisms differ, so the same general statement handle carefully does not explain either control.

04 A good answer links splash/contact controls to corrosivity and incompatibility or fire-prevention controls to oxidizing behaviour as specified by the SDS.

Watch out

Do not infer that all colourless liquids are harmless or that one symbol captures every hazard.

Exam habit

Pair each property with its consequence; listing pictogram names alone gives less evidence of understanding.

05 Your turn

A bottle has both flammable and corrosive hazards. State two distinct risks and a control principle for each.

If you get stuck, uncover one hint at a time:

1. Separate the two label properties before suggesting controls.

2. For flammability, explain an ignition/fire risk and a suitable approved ignition-control principle.
3. For corrosivity, explain tissue-damage risk and an approved exposure-prevention principle. Do not treat one control as covering both mechanisms.

06 Check your understanding

Does a chemical being nonflammable prove it cannot intensify a fire?

A bottle is both flammable and corrosive. Which statement is best?

1. Both fire and damaging-contact risks need suitable controls
2. Removing ignition sources alone resolves every hazard
3. Eye protection alone makes ignition impossible

Answers and explanations: page 31.

Glassware, measurement and safe apparatus

LS / 05

- Select apparatus according to measurement purpose and safe operating limits.
- Explain why volumetric preparation and heating require different vessels.

You need: Volume; calibration mark; damaged glassware can fail during use.

01 Idea

Inspect glassware for chips and cracks and apparatus for damaged wiring before use. A beaker is useful for holding and mixing; a graduated cylinder gives more useful volume estimates; a volumetric pipette or flask is designed for a specified accurate volume. Read liquid levels at eye height using the appropriate meniscus.

Accurate liquid handling depends on both choosing the right instrument and using it as calibrated. A fixed-volume volumetric pipette is intended to deliver one specified volume under its stated conditions. Safe pipetting and proper reading matter as much as the printed volume.

- A vessel marked for approximate volume may not deliver the required fixed volume accurately.
- The calibration method determines how the instrument should be filled, read and drained.

02 Rule and symbols

Rule	Choose the instrument for required precision, not convenience

03 Method

1. State whether the task requires approximate volume, accurate delivery or preparation to a final volume.
2. Choose the apparatus designed for that purpose and check its condition.
3. Follow the specified filling, meniscus and operating procedure.
4. Before heating, verify that the vessel and setup are approved for the process.

For an accurate fixed transfer, distinguish a volumetric pipette from a flask that contains a final prepared volume.

04 Worked example

A volumetric flask prepares a solution to its marked final volume.

01 The volumetric flask is calibrated to contain a stated final volume at its reference conditions.

02 The solution is brought to the mark as part of an approved preparation procedure.

03 Its main role is volume accuracy, not serving as a directly heated reaction vessel.

04 For heating a reaction, use the vessel and support specified by the laboratory method rather than substituting the flask.

Watch out

Extra decimal places do not make an imprecise instrument accurate.

Exam habit

In apparatus questions state the purpose and limitation together: prepares final volume, unsuitable for directly heating the reaction.

05 Your turn

Name a suitable device to transfer an accurate fixed 10 mL volume and explain two good practices.

If you get stuck, uncover one hint at a time:

1. The task asks to transfer a fixed accurate volume, not prepare a solution to a final flask mark.
2. Select an appropriate fixed-volume volumetric pipette and approved pipette aid.

3. For good practices, explain correct meniscus reading and use according to its calibration/draining instructions. Mouth pipetting is not acceptable.

06 Check your understanding

Does having a calibration mark mean a flask is suitable for direct heating?

A volumetric flask and a volumetric pipette both show 10 mL. Why are they not automatically interchangeable?

1. The same printed number guarantees identical delivery
2. They are designed for different volume-handling purposes
3. Only a flask ever has calibration

Answers and explanations: page 31.

Hoods, heating, cooling and pressure

LS / 06

- Explain why heating a closed unsuitable vessel can create a pressure hazard.
- Recognize when an apparatus setup requires instructor review.

You need: Heating can increase vapour production and gas pressure; equipment has specific operating limits.

01 Idea

A fume hood controls airborne chemical exposure when used correctly. It is not a storage cabinet or a waste-evaporation device. Heating and cooling systems can introduce burns, pressure changes and material failure. Approved setups account for both temperature and pressure.

A heated closed vessel can store pressure as well as thermal energy. A volatile liquid supplies vapour, and heating can increase that vapour pressure. If the vessel or closure is unsuitable, failure can release hot hazardous contents suddenly; a hood does not turn it into pressure-rated equipment.

- Heating an enclosed volatile liquid can raise internal pressure.
- Container failure can eject hot liquid or vapour, adding exposure and burn consequences.

02 Rule and symbols

Rule	Control vapour, ignition, pressure and thermal contact separately

03 Method

1. Identify heat source, volatile materials and any sealed volume.
2. Check the approved procedure and apparatus pressure and temperature limits.
3. Use the specified containment, heating and ventilation arrangements.
4. If the setup differs or becomes unsafe, stop and alert the responsible instructor instead of modifying it ad hoc.

A tightly sealed volatile-liquid heating setup requires checking the approved apparatus rather than improvising a modification.

04 Worked example

A volatile solvent warmed in an unsuitable sealed container can build pressure.

01 Warming the volatile solvent increases vapour formation.

02 In an unsuitable sealed container, expanding gas and vapour can increase internal pressure.

03 The container or closure may fail because it was not designed for that operation.

04 The example therefore calls for stopping and consulting the approved setup; improvising a vent is not a validated correction.

Watch out

A hood does not remove every fire, pressure or contact hazard.

Exam habit

Explain the mechanism, pressure buildup from heating, before giving the required stop-and-consult response.

05 Your turn

Give two reasons why heating a tightly sealed vessel containing a volatile liquid is hazardous.

If you get stuck, uncover one hint at a time:

1. Trace how heating affects vapour inside a tightly sealed space.
2. Connect the resulting pressure to possible vessel or closure failure.
3. State a second consequence involving hot released contents, such as burns or hazardous exposure, and relate it to the need for the approved setup.

06 Check your understanding

Does placing an unsuitable sealed heated vessel in a fume hood solve its pressure hazard?

Does placing an unsuitable sealed heated vessel in a fume hood make the pressure setup acceptable?

1. Yes; all hoods prevent pressure buildup
2. Yes; a hood removes liquid volatility
3. No; ventilation does not make a vessel pressure-rated

Answers and explanations: page 31.

Waste, housekeeping and emergency priorities

LS / 07

- Use identification and approved procedures to choose a waste or spill response.
- State safe priorities when a spill material is unknown.

You need: Chemical incompatibility; designated waste streams; laboratory emergency instructions.

01 Idea

Waste must follow the laboratory segregation and disposal procedure. Broken glass, sharps and chemical waste are different streams. Good housekeeping keeps exits and emergency equipment accessible. In an incident, alert others and follow the established response; do not improvise a hazardous cleanup.

Emergency equipment is useful only when people can reach and operate it promptly. A storage box can create risk without being chemically hazardous itself because it delays the response to another event. Housekeeping therefore protects the reliability of the laboratory safety system.

- A blocked eyewash can delay response to an eye exposure.
- Keeping the access route clear reduces that delay before an emergency occurs.

02 Rule and symbols

Rule

Recognize → alert → follow trained response

03 Method

1. Identify the material only if that can be done safely from available records or labels.
2. Keep others clear and alert the instructor or responsible responder.
3. Use the laboratory response plan for the identified hazard and your training level.

4. For routine waste, use the designated compatible container and labelling procedure.

An obstructed emergency station is a prevention and access problem, even when no spill or exposure is currently happening.

04 Worked example

An unknown spill is not an invitation to mix in a neutralizer.

01 An unknown spill has uncertain properties, so an assumed neutralizer may be incompatible.

02 Adding another chemical could cause heat, gas formation or another hazardous reaction.

03 Alerting the instructor and keeping people clear limits exposure while the material and response are assessed.

04 Cleanup then follows the approved spill procedure for the identified material and trained personnel.

Watch out

Do not recommend that an untrained student fight every fire or clean every spill.

Exam habit

In an emergency scenario prioritize alerting and exposure prevention; do not invent a chemical cleanup recipe.

05 Your turn

A box blocks access to the eyewash station. Explain the risk and an appropriate preventive action.

If you get stuck, uncover one hint at a time:

1. Identify the purpose of an eyewash and when rapid access matters.
2. Explain how a box could delay a person trying to respond to an eye exposure.

3. Propose promptly clearing and maintaining the route through the responsible housekeeping procedure. Link the action to access rather than claiming the box itself is corrosive.

06 Check your understanding

Should an unknown laboratory liquid automatically be washed into a sink?

Why can a harmless empty box near emergency equipment still create risk?

1. It can delay access when the equipment is needed
2. It must release toxic vapour
3. Emergency equipment works only when boxes are present

Answers and explanations: page 31.

Biosafety and the control hierarchy

LS / 08

- Classify controls within the hazard-control hierarchy.
- Distinguish engineering containment from training, work practices and PPE.

You need: A biological hazard may be spread through aerosols, contact or sharps depending on the activity.

01 Idea

Biosafety aims to prevent unintended exposure to biological agents and their release. The general control hierarchy prefers removing a hazard, then using a safer substitute, then engineering controls, administrative controls and work practices, and PPE. The suitable controls depend on the task: removing or replacing the biological material may not be possible. Training and procedures are administrative controls; suitable containment equipment is an engineering control. Safe work practices include hand hygiene and avoiding aerosol generation.

Controls work at different places in the hazard pathway. Equipment containment can isolate the source, procedures guide behaviour, and PPE forms a barrier worn by a person. Classifying a control means explaining its mechanism; it does not mean one category makes every other category unnecessary.

- Engineering controls act through equipment or physical containment.
- Training and handwashing procedures guide work practices, while goggles are worn personal protection.

02 Rule and symbols

Rule

Eliminate → substitute → engineering → administrative/work practices → PPE

03 Method

1. Identify the biological material and activity-specific exposure route.
2. Consider elimination or substitution where feasible before downstream controls.

3. Classify equipment containment as engineering, training and procedures as administrative or work-practice controls, and worn barriers as PPE.
4. Explain how the selected combination addresses the task and follows institutional biosafety procedures.

When asked to classify controls, describe what each does before assigning its hierarchy category.

04 Worked example

Training is administrative.

01 Training changes how people work, so it is an administrative control.

02 A suitable biological safety cabinet provides engineering containment for its approved uses.

03 Gloves form a worn barrier and are PPE.

04 A safe handling technique is a work practice, generally grouped with administrative controls; the categories describe different protective mechanisms.

Watch out

A device with airflow is not automatically suitable for every chemical or biological hazard.

Exam habit

Do not label every cabinet or hood as interchangeable containment; state suitable equipment for the defined biological task.

05 Your turn

Classify goggles, safety training, a suitable containment cabinet and correct handwashing.

If you get stuck, uncover one hint at a time:

1. Sort the examples into equipment, behaviour/procedure and worn protection.

2. Classify the suitable cabinet as engineering containment and goggles as PPE.
3. Place training under administrative controls and correct handwashing under work practices, commonly grouped with administrative controls. Explain the basis rather than just listing labels.

06 Check your understanding

What is the general hierarchy from source-focused to last-line protection?

A suitable containment cabinet and goggles are used together. Why can both be needed?

1. PPE always eliminates the source hazard
2. They interrupt exposure through different protective mechanisms
3. They belong to exactly the same control category

Answers and explanations: page 31.

The control hierarchy in the correct order

The hierarchy ranks ways to control a hazard. A list of control types is not automatically in the preferred order.

- Eliminate: remove the hazard.
- Substitute: use a safer alternative after checking its risks.
- Engineering controls: separate people from the hazard using suitable equipment or containment.
- Administrative controls and work practices: use training, procedures and safe methods.
- PPE: use suitable worn protection. It adds protection but depends on correct selection and use.

- In a laboratory, eliminating or replacing the material may not be possible. The assessed task determines the suitable combination of controls.

Classify a suitable containment cabinet, safety training, gloves and correct handwashing.

1. The cabinet is an engineering control.
2. Training is administrative; gloves are PPE.
3. Handwashing is a safe work practice, often grouped with administrative controls.

Engineering; administrative; PPE; work practice, respectively. Engineering controls come before administrative controls and PPE in the general hierarchy.

Lesson review and answers

Hazard, risk and prevention

Return to lesson: page 6.

Your turn: Risk also depends on how exposure can occur, how likely it is and how serious its consequences could be.

Concept check: 1. Correct. Handling conditions can change exposure while the underlying hazardous property remains.

Written method: Problem: unassessed chemical hazards. Actions: consult the reagent SDS and approved procedure; clarify required controls and waste handling with the instructor before use. One mark for hazard, one for exposure reasoning and one per specific action.

Personal protective equipment and contamination

Return to lesson: page 9.

Your turn: No. Gloves can carry contamination directly to the face.

Concept check: 2. Correct. Compatibility and performance depend on material, chemical and conditions.

Written method: Prescription glasses do not seal against splashes; appropriate splash goggles are needed. A coat does not protect hands, so compatible gloves may be required by the assessed procedure. Award one mark per protection gap and suitable control.

Exposure routes and toxic effects

Return to lesson: page 12.

Your turn: No. It is eye or mucous-membrane contact.

Concept check: 3. Correct. Safety depends on identified properties and exposure controls, not smell alone.

Written method: Vapour: inhalation. Needle: injection. Some harmful substances are odourless, or odour detection is unreliable. One mark per route and two for the explanation.

Labels, SDS and chemical properties

Return to lesson: page 15.

Your turn: No. An oxidizer may intensify combustion without being a fuel.

Concept check: 1. Correct. The properties create separate pathways requiring an appropriate combination of controls.

Written method: Fire risk: control ignition sources using the approved setup. Tissue damage from splashes: prevent contact using appropriate containment and compatible protection. One mark per risk and per linked control.

Glassware, measurement and safe apparatus

Return to lesson: page 18.

Your turn: No. Calibration and suitability for heating are different design requirements.

Concept check: 2. Correct. A flask contains a prepared volume; a pipette is designed to transfer a calibrated volume according to its type.

Written method: Use an appropriate 10 mL volumetric pipette with a pipette aid. Read the meniscus at eye level and follow the calibrated delivery procedure. Credit device, aid and two measurement practices.

Hoods, heating, cooling and pressure

Return to lesson: page 21.

Your turn: No. A hood does not make a vessel pressure-rated or validate an unsafe heating setup.

Concept check: 3. Correct. Engineering ventilation and pressure suitability are different requirements.

Written method: Vapour generation can raise pressure, and thermal expansion can further stress the vessel. Rupture can release hot liquid or vapour. Credit two mechanisms and their resulting consequences.

Waste, housekeeping and emergency priorities

Return to lesson: page 24.

Your turn: No. Its identity, compatibility and approved disposal route must be established.

Concept check: 1. Correct. Obstruction creates a response-time hazard even if the box material is harmless.

Written method: It can delay emergency irrigation after exposure. Keep access clear and report the obstruction so it is corrected promptly under laboratory procedures. Credit emergency delay, possible worsening of injury, removal/reporting and prevention.

Biosafety and the control hierarchy

Return to lesson: page 27.

Your turn: Elimination, substitution, engineering controls, administrative controls and work practices, then PPE.

Concept check: 2. Correct. Containment and worn barriers can form complementary protections specified for the task.

Written method: Goggles: PPE. Training: administrative control. Suitable containment cabinet: engineering control. Correct handwashing: safe work practice (often grouped with administrative controls). One mark each.

Instruments and Lab Safety / Test A

20 marks / Suggested time: 20 minutes. MCQs: 1 mark each. Written problems: 4 marks each. Attempt without notes.

Part I / Choose one answer

1. Which best describes risk?
   A. The mass of any bottle
   B. The same as smell
   C. The label colour alone
   D. The chance and severity of harm under the exposure conditions
2. Which is appropriate before touching a clean door handle?
   A. Keep contaminated gloves on
   B. Wipe gloves on clothing
   C. Remove contaminated gloves correctly
   D. Smell the gloves
3. Eating with contaminated hands is mainly which exposure route?
   A. Inhalation
   B. Injection
   C. Noise exposure
   D. Ingestion
4. An oxidizer is especially associated with:
   A. Intensifying combustion
   B. Preventing all fires
   C. Measuring temperature
   D. Making all chemicals inert

Part II / Show your reasoning

1. A student uses an unfamiliar reagent without reading its safety information. Identify the problem and two appropriate preparatory actions.

2. Explain why ordinary prescription glasses and a lab coat alone are insufficient for a splash-risk task.

3. Classify inhaling vapour and a contaminated needle puncture by exposure route. Explain why no smell does not prove no hazard.

4. A bottle has both flammable and corrosive hazards. State two distinct risks and a control principle for each.

Instruments and Lab Safety / Test B

20 marks / Suggested time: 20 minutes. MCQs: 1 mark each. Written problems: 4 marks each. Attempt without notes.

Part I / Choose one answer

1. Which is designed to prepare one accurately specified solution volume?

   A. A beaker

   B. A watch glass

   C. A volumetric flask

   D. A test-tube rack

2. A fume hood should be used as:

   A. Permanent chemical storage

   B. A controlled work enclosure for appropriate vapour hazards

   C. A way to evaporate all waste

   D. A food cupboard

3. An unknown chemical spill should first prompt a student to:

   A. Alert the instructor and keep people clear

   B. Mix it with another chemical

   C. Ignore it

   D. Taste it

4. Which is an administrative control?

   A. Gloves

   B. Training and written procedures

   C. A sealed rotor

   D. Splash goggles

Part II / Show your reasoning

1. Name a suitable device to transfer an accurate fixed 10 mL volume and explain two good practices.

2. Give two reasons why heating a tightly sealed vessel containing a volatile liquid is hazardous.

3. A box blocks access to the eyewash station. Explain the risk and an appropriate preventive action.

4. Classify goggles, safety training, a suitable containment cabinet and correct handwashing.

Instruments and Lab Safety / Test A / Answers

Suggested marking points are for self-study; your lecturer may use a different scheme.

Question 1

MCQ: D. Risk depends on both the hazard and how people are exposed.

Written solution: Problem: unassessed chemical hazards. Actions: consult the reagent SDS and approved procedure; clarify required controls and waste handling with the instructor before use. One mark for hazard, one for exposure reasoning and one per specific action.

Return to lesson: page 6.

Question 2

MCQ: C. This prevents spreading contamination outside the work area.

Written solution: Prescription glasses do not seal against splashes; appropriate splash goggles are needed. A coat does not protect hands, so compatible gloves may be required by the assessed procedure. Award one mark per protection gap and suitable control.

Return to lesson: page 9.

Question 3

MCQ: D. Material can pass from the hands to food and the digestive system.

Written solution: Vapour: inhalation. Needle: injection. Some harmful substances are odourless, or odour detection is unreliable. One mark per route and two for the explanation.

Return to lesson: page 12.

Question 4

MCQ: A. Oxidizers can support or intensify combustion.

Written solution: Fire risk: control ignition sources using the approved setup. Tissue damage from splashes: prevent contact using appropriate containment and compatible protection. One mark per risk and per linked control.

Return to lesson: page 15.

Instruments and Lab Safety / Test B / Answers

Suggested marking points are for self-study; your lecturer may use a different scheme.

Question 1

MCQ: C. The calibration mark defines the specified contained volume under its calibration conditions.

Written solution: Use an appropriate 10 mL volumetric pipette with a pipette aid. Read the meniscus at eye level and follow the calibrated delivery procedure. Credit device, aid and two measurement practices.

Return to lesson: page 18.

Question 2

MCQ: B. It is an engineering control for relevant airborne exposures.

Written solution: Vapour generation can raise pressure, and thermal expansion can further stress the vessel. Rupture can release hot liquid or vapour. Credit two mechanisms and their resulting consequences.

Return to lesson: page 21.

Question 3

MCQ: A. Unknown hazards require assessment and the established response.

Written solution: It can delay emergency irrigation after exposure. Keep access clear and report the obstruction so it is corrected promptly under laboratory procedures. Credit emergency delay, possible worsening of injury, removal/reporting and prevention.

Return to lesson: page 24.

Question 4

MCQ: B. Administrative controls organize how work is authorized and performed.

Written solution: Goggles: PPE. Training: administrative control. Suitable containment cabinet: engineering control. Correct handwashing: safe work practice (often grouped with administrative controls). One mark each.

Return to lesson: page 27.

Formula sheet

Hazard, risk and prevention p.6

Rule

Good answer: hazard → exposure route → control

Personal protective equipment and contamination p.9

Rule

Select PPE for the specific hazard and task

Exposure routes and toxic effects p.12

Rule

Dose, duration, route and substance all influence harm

Labels, SDS and chemical properties p.15

Rule

Identity + hazard + controls + incompatibilities

Glassware, measurement and safe apparatus p.18

Rule

Choose the instrument for required precision, not convenience

Hoods, heating, cooling and pressure p.21

Rule

Control vapour, ignition, pressure and thermal contact separately

Waste, housekeeping and emergency priorities p.24

Rule

Recognize → alert → follow trained response

Biosafety and the control hierarchy p.27

Rule

Eliminate → substitute → engineering → administrative/work practices → PPE

Symbol glossary

Symbols are listed with their lesson context. A symbol may represent different quantities in different rules.

Source and coverage notes

SCI 101 lecture chapters 1-3: accident prevention, chemical hazards, laboratory techniques, emergency principles and biosafety. This is exam study material; real laboratory work follows the current instructor procedure and chemical-specific safety information.

Open original course folder

The source audit inventories 159 non-programming files; 95 yielded substantial extracted text. Scanned diagrams and handwritten or image-only material were not fully transcribed. Check lecturer-specific derivations and conventions. The practice tests are original study material, not predictions of an examination.

Topic index

Find a lesson alphabetically. For individual symbols, use the subject symbol glossaries listed in the contents.

Biosafety and the control hierarchy 27

Exposure routes and toxic effects 12

Glassware, measurement and safe apparatus 18

Hazard, risk and prevention 6

Hoods, heating, cooling and pressure 21

Labels, SDS and chemical properties 15

Personal protective equipment and contamination 9

Waste, housekeeping and emergency priorities 24