


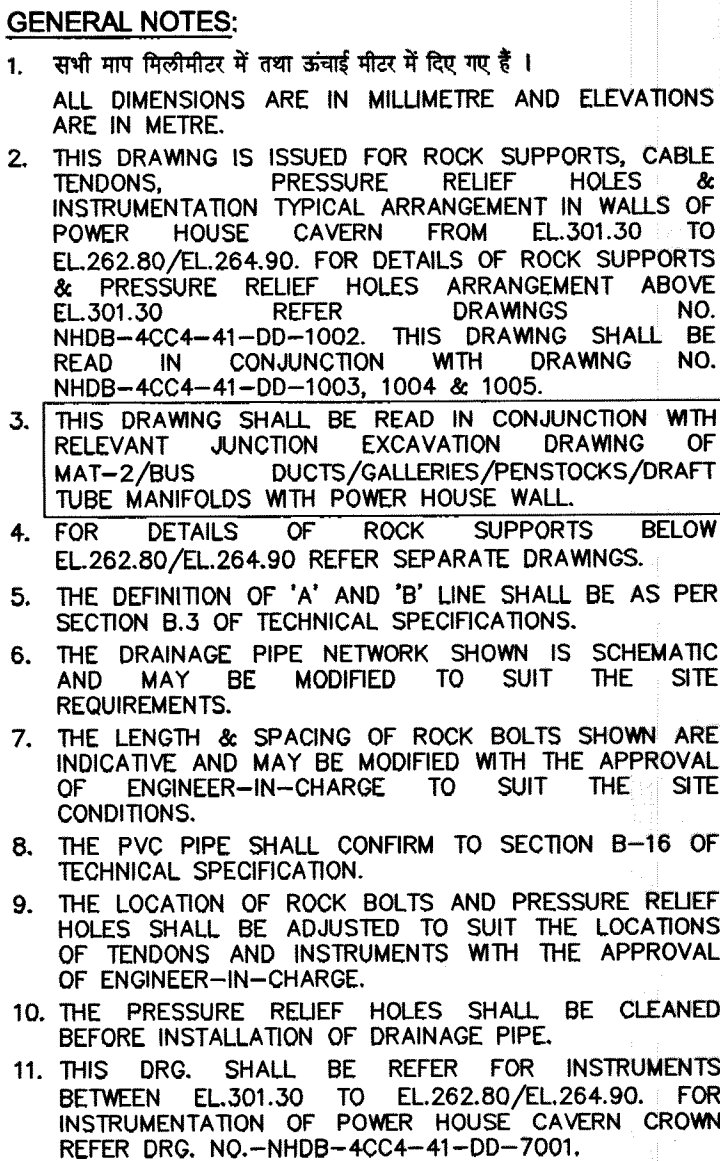

- × 36Ø 12000 LONG ROCK BOLTS
- 32Ø 12000 LONG ROCK BOLTS
- ⊗ 32Ø 9000 LONG ROCK BOLTS
- ① (TYPE-1)-1200KN GUARANTEED ULTIMATE TENSILE STRENGTH (GUTS), LOCK OFF LOAD SHALL BE 60% OF GUTS, TOTAL LENGTH=30M.
- ⊕ 45Ø 10500 LONG PRESSURE RELIEF HOLE
- × CONVERGENCE MEASUREMENT (OPTICAL TARGETS)
- ♀ LOAD CELL (30T CAPACITY)
- ♂ MULTIPLE POINT BORE HOLE EXTENSOMETER (5M, 10M, 15M) (3 POINTS)
- ♂ MULTIPLE POINT BORE HOLE EXTENSOMETER (4M, 7M, 10M, 13M, 16M, 19M) (6 POINT)
- ① × ♂ (COMBINATION OF INSTRUMENTS-1)
- ② × ♂ (COMBINATION OF INSTRUMENTS-2)
- BT BEAM TOP LEVEL
- TL TENDONS LEVEL
- IL INSTRUMENTATION LEVEL
- ⊗ ROCK SUPPORTS AND PRESSURE RELIEF HOLES IN MARKED ZONE SHALL BE INSTALLED AS PER RELEVANT JUNCTION DRAWINGS OF INTERFACING STRUCTURE.

एन एच पी सी लिमिटेड NHPC A Narrastra Company	एन एच पी सी लिमिटेड (एकता प्रकल्प बाबत च्या नववर्तमान नावाचा) NHPC Limited (A GOVT. OF INDIA NARRASTRA ENTERPRISES)
दिबांग बहुउद्देशीय परियोजना DIBANG MULTIPURPOSE PROJECT	
POWER HOUSE ROCK SUPPORTS, CABLE TENDONS, PRESSURE RELIEF HOLES AND INSTRUMENTATION (EL.301.30 M TO EL.262.80 M / EL.264.90 M) TYPICAL ARRANGEMENT WALL ELEVATION	
(SHEET 1 OF 14)	

DRAWN अश्विनी	DESIGNED 	SUBMITTED 	RECOMMENDED 	APPROVED 	CHECKED
प्रस्तावक (PROBAST ASHWINI)		अनुमोदित (APPROVED ASHWINI KUMAR)		डेम्प्ट्री (DEMPTRI)	
DATE JAN 2026	DRWG. NO. NHDB	4CC4	41	DD	1012
00					

1. NHDB-4AC4-41-DD-0001.
2. NHDB-4CC4-41-DD-0001.
3. NHDB-4CC4-41-DD-1002.
4. NHDB-4CC4-41-DD-1003, 1004 & 1005.
5. NHDB-4CC4-41-DD-1007.
6. NHDB-4BC4-41-DD-1023, 1036 & 1042.
7. NHDB-4CC4-41-DD-7001.