


MCU (REG0 LDO mode: DCCH open, VDDH = system rail)

USB-C mid-mount (5.1k CC pull-downs = sink)

Charger MCP73831: Ichg = 1000V / R3 = 100 mA / LED1 lights when charging (9) USB PowerB5, else battery (15) USB PowerB5 (6) VSYS in low LEDs (bicolour, common anode = VDD, GPIO sinks, active low) / LED2-4 = BT1-3 (green die), LED5 = power (green OK / red < 20 %)

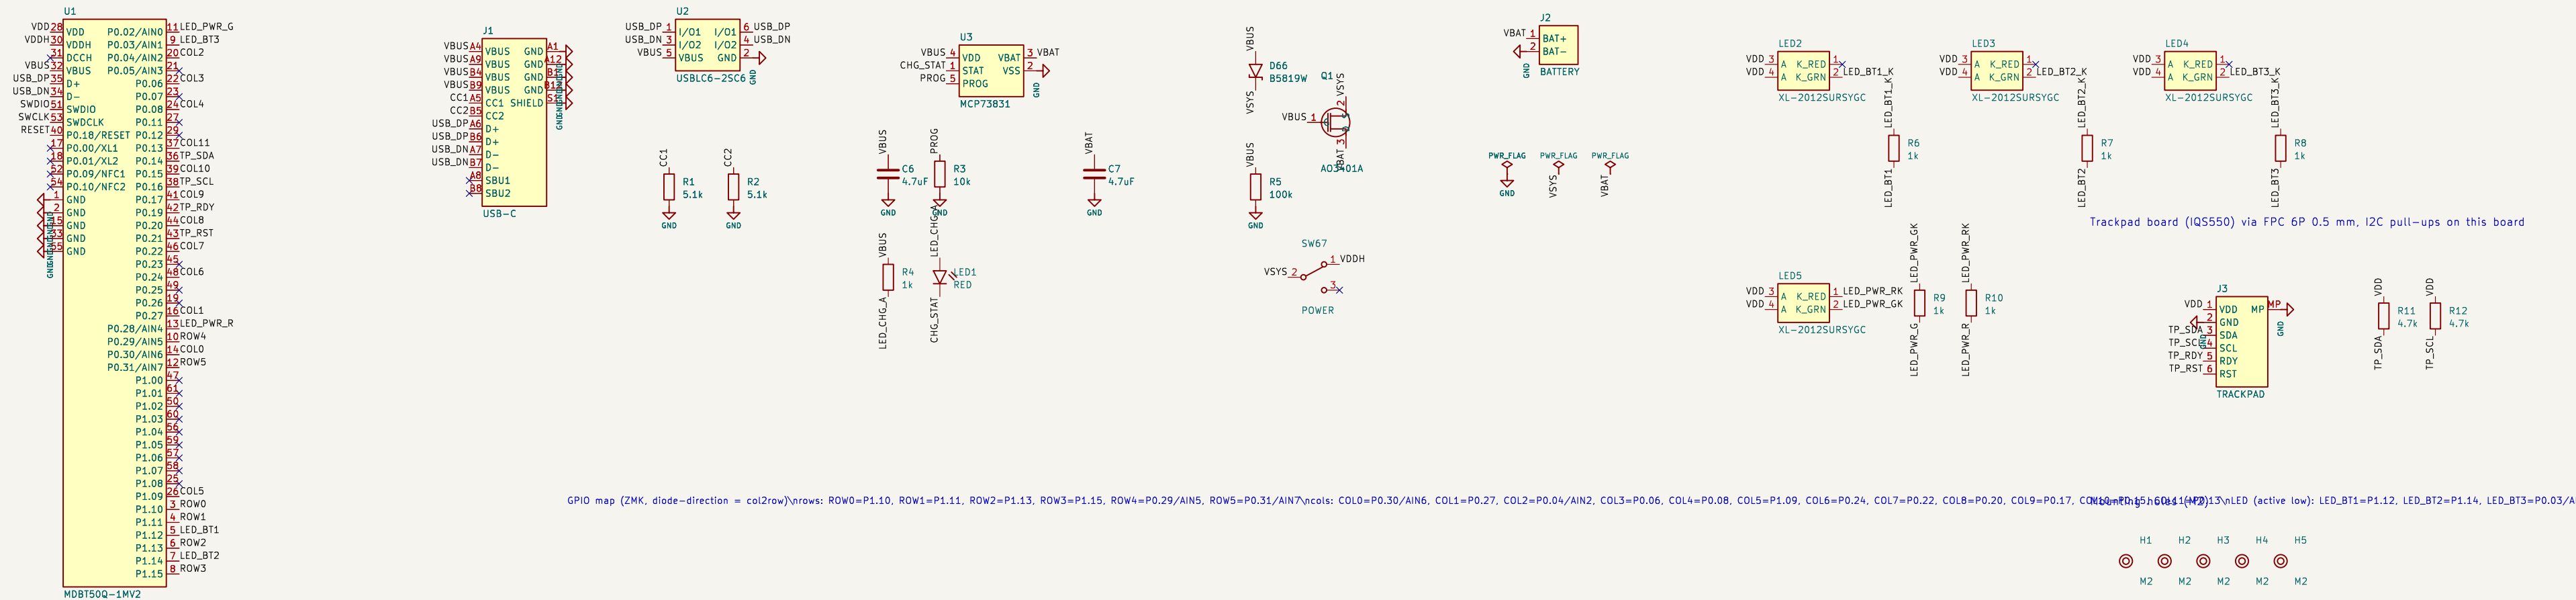

Module decoupling (place at pins)

Reset (double-tap = UF2) / SWD pads



Key matrix 6 x 12 (65 keys, ALPS SKRA + 1N4148W, COL -> SW -> D -> ROW)

